

Cable DuraTech® SRL-R

The DuraTech® SRL-Rs are designed for long lasting performance in fall arrest applications that may require emergency rescue and retrieval functions in a single device.

Large rotating swivel eye anchorage connection point for overhead use



ANSI Z359.14 Class B SRL-R

Built-in carrying handle for easy transport and installation

Powder coated aluminum alloy housing and zinc plated steel bracket for durable performance

Available in 85-foot or 120-foot lengths

3/16" galvanized steel cable lifeline

Collapsible rescue and retrieval mode handle

ANSI Z359.12 compliant load indicating swivel snaphook




Handle shown in use position

Cable DuraTech® SRL-R



SRL-R shown mounted on a Tripod System (7275)

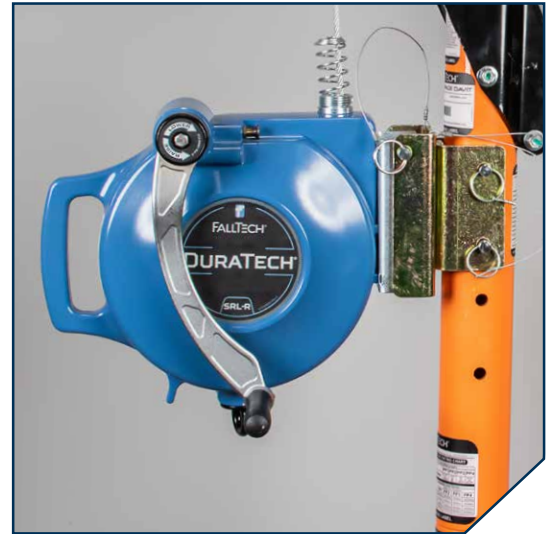

SRL-R shown mounted on Davit System (6050128)

Material Specifications	
Housing	Aluminum Alloy
Lifeline Constituent	3/16" Galvanized Steel Wire Rope Min. 3,400 lbs. Tensile Strength
Bracket	Zinc Plated Alloy Steel Min. 3,000 lbs. Tensile Strength
Load Indicating Swivel Snaphook	Zinc Plated Alloy Steel Min. 5,000 lbs. Tensile Strength with 3,600 lbs. Gate Strength

Relevant Standards	
ANSI	Z359.14-2014 Class B
OSHA	1910.140, 1926.502

Performance Specifications	
ANSI SRL Class	SRL-R Class B
Average Arrest Force	1,125 lbs. Maximum
Maximum Arrest Force	1,800 lbs.
Maximum Arrest Distance	54" or Less
Static Strength	3,000 lbs. Minimum
ANSI User Capacity	One User up to 310 lbs. Maximum

Part Numbers & Lengths		
Part No.	7277	7278
Rope Length	85'	120'