


# CABLE D-RING EXTENDER

## 8366C Cable D-Ring Extender

- Extender provides improved over the shoulder reach for connection of SRLs and lanyards.
- 18" length features 1/4" galvanized steel cable, steel thimbles and swaged aluminum ferrules.
- Includes alloy steel snap hook for Dorsal D-Ring connection.

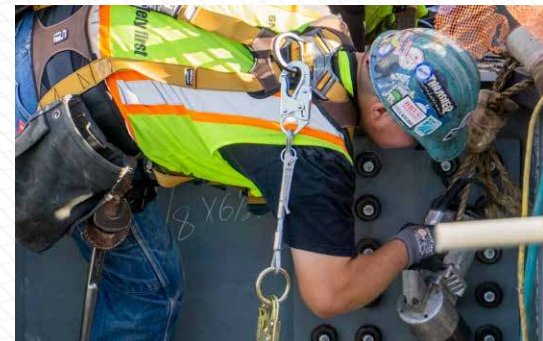

Material Specifications	
<b>Cable</b>	Galvanized steel; 5,000 lbs. Min. Static Strength
<b>Connector</b>	Plated Alloy Steel; 5,000 lbs. Min. with 3,600 lbs. Gate Strength
<b>Connection Ring</b>	Plated Alloy Steel; 5,000 lbs. Min. Static Strength

Performance Specifications	
<b>Static Strength</b>	5,000 lbs. Minimum
<b>ANSI User Capacity</b>	310 lbs. Max
<b>OSHA User Capacity</b>	425 lbs. Max

Relevant Standards	
<b>ANSI</b>	Z359.11-2014 and Z359.3-2017
<b>OSHA</b>	1926.502

**NOTE:** Use of an extender will increase the user's potential fall distance. The user must be sure the increased total length of a lanyard is accounted for in calculating fall clearance distances, including swing fall. Be aware that when using an SRL, there may be additional fall clearance required depending on anchor point location. If unsure, consult a Competent Person.