
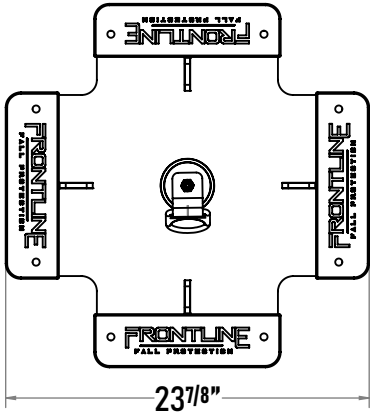
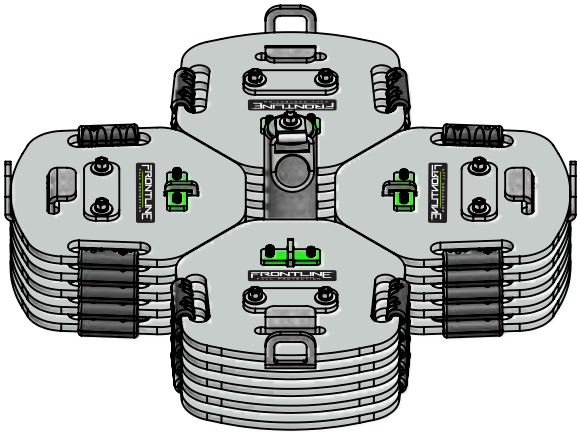
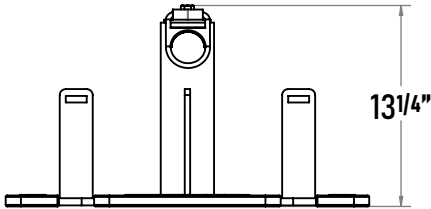


Design Specifications
Fall arrest or restraint for 1 worker up to 8' away from the edge
Compatible with roofs with up to a 5° pitch
D-ring anchor swivels 360 degree for better usability
Includes ergonomic carry handles to avoid pinch hazards and better handle weights
Completely non-penetrating anchor
Includes picking 4 points to safely transport the anchor
Comes fully assembled and ready to use with Frontline compatible equipment
Anchor includes EPDM fittings for better friction coefficient and to help protect finish substrates

Application	Non-penetrating Anchor
Material Specifications	
User Maximum Capacity	310 lbs
Anchor Finish	Galvanized
Weights Finish	Electrostatic paint coating with anti-corrosion properties and resistance
Product Weight	± 806 lbs
Relevant Standards	
OSHA	1926
	1910
EN	795.2012

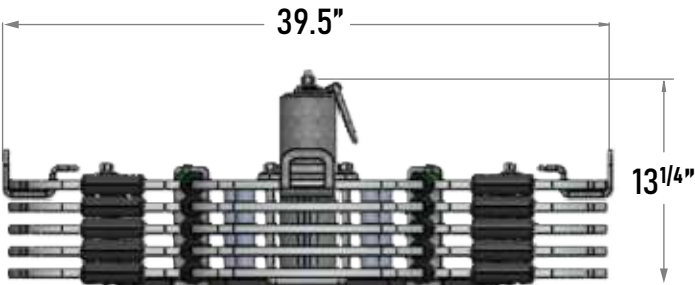

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.
- Product must be lifted/rigged and approved under the supervision of a qualified person before lifting the anchor so the operation can be done safely. Frontline assumes no responsibilities on unsafe lifting/rigging practices.

