

# COMMANDO TANK

## NON-PENETRATING FALL PROTECTION CART

CMT04

Frontline Introduces the Commando Tank, **the most innovative and revolutionary non-penetrating fall arrest cart in the industry!** This OSHA compliant cart is engineered and designed to enhance safety and efficiency on the jobsites with a user capacity for up to 4 users.



DESIGN SPECIFICATIONS	
Color	■ Electrostatic Safety Green
Material	High Strength ASTM Rated Steel
Application	Concrete, TPO, EPDM

When working at heights and exposed to a fall hazards, trust the Frontline Commando Tank non-penetrating cart to be the ultimate solution for ensuring worker safety and efficiency.

PATENT PENDING

### FEATURES




**TOOL BOX**  
Weather-resistant, ±1.5 cubic feet of storage for tools and equipment.




**LIFTING JACK**  
Allows the unit to be raised for easy and controlled repositioning.



**6 FLAT-FREE TIRES**  
Allowing easy movement and precise positioning within work area.



**WEATHER-PROOF COVER**  
Ensures product long-lasting and includes an adjustable strap for a secure fit.

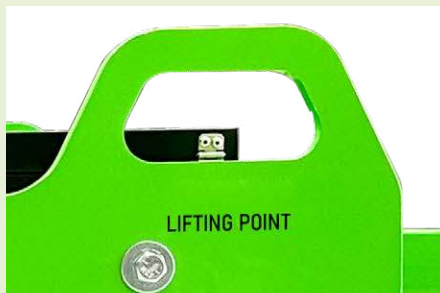

■ 4 LIFTING POINTS



■ 2 USERS IN FALL ARREST



■ 2 USERS IN FALL RESTRAINT



CMT04-SLR

**FRONTLINE**  
FALL PROTECTION



TOTAL NUMBER OF  
USERS:  
FALL ARREST: 2 |  
FALL RESTRAINT: 2


\*SOLAR PANEL SETUP IS OPTIONAL

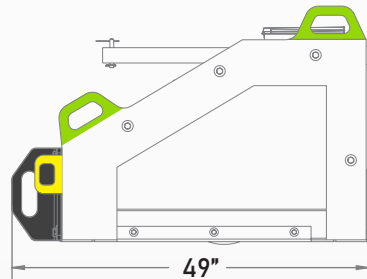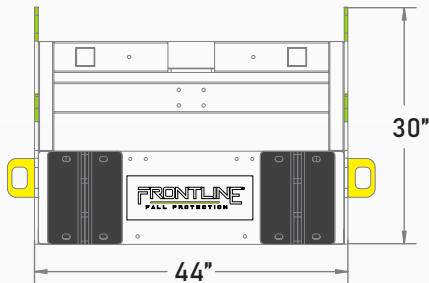

TELESCOPIC  
HANDLE

### SOLAR-POWERED CART FEATURES

- **Built-in Impact Sensor:** Activates a 110 dB alarm if a fall occurs with a force exceeding 300 lbs, ensuring immediate alertness to those in the work area.
- **Powerful Directional Lights:** Two high-intensity directional lights, each delivering 4,000 lumens and up to 5 hours of lighting, facilitate safe and efficient work during low-light conditions.
- **Solar Panels:** Includes 8 slim designed solar panels that power the recharge batteries that feeds the impact sensor, alarm system and LED lights.



#### HIGH INTENSITY LIGHTS

Two 4,000-lumen lights provide up to 5 hours of illumination on a full charge in low-light conditions.

SELF SUSTAINABLE  
SOLAR PANEL SETUP  
\*Optional



BATTERY LEVEL  
INDICATOR



IMPACT SENSOR  
ALARM



### SPECS AND COMPLIANCE:

Weight: ± 1,500 lbs  
Substrates: Concrete, TPO, EPDM, Asphalt  
Compliance: Meets or exceeds OSHA  
1910.140 and 1926.502

**OSHA**  
COMPLIANT 1910.140

