



SPEC SHEET

COT345K Reusable Toggle Bolt Concrete Anchor 5k

Design Specifications

A removable and reusable anchor designed to work in hollow-core concrete or in steel flange with a minimum thickness of 1/4" (64mm).

Material Specifications



Toggle Bar	Stainless Steel
Ball Shank	Stainless Steel
Spring	Zinc Plated Steel
Swage	Zinc Plated Copper
Hole Plug	Aluminum
Anchor Loop	Polyurethane
Main Cable	Aircraft Cable
Activator Wire	Aircraft Cable

Performance Specifications

Tensile Strength	5,000-lbf / 22kN
Max User Weight	310-lbs / 140kg
Working Load	1,000-lbs / 454kg

Relevant Standards

ANSI	Z359.1-2007
	Z359.7-2011
OSHA	CFR 1926.502
	CFR 1910.140
EN	795

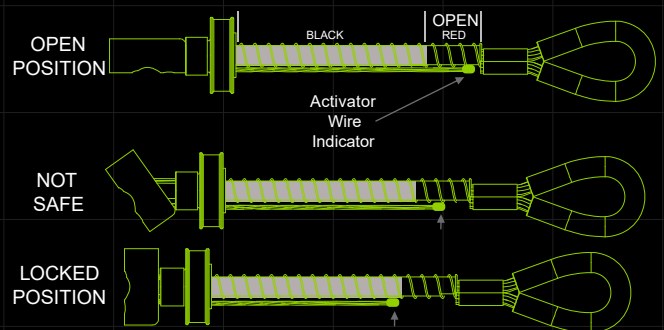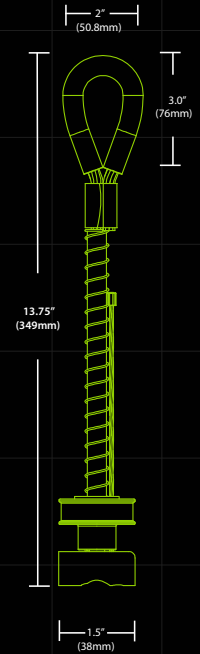

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.

