


SPEC SHEET


Confined Space Davit Arm System with Non-Penetrating H-Base



DAC-HB

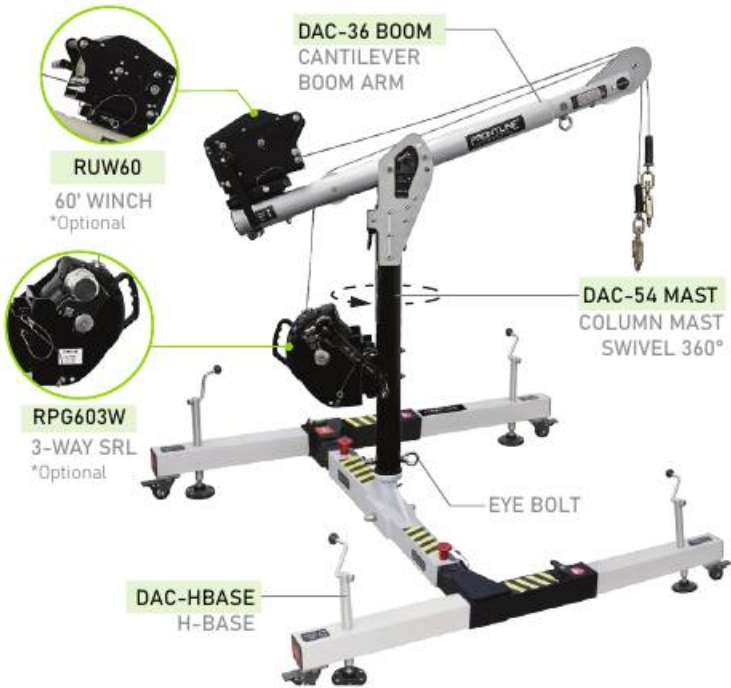

DAC-HB

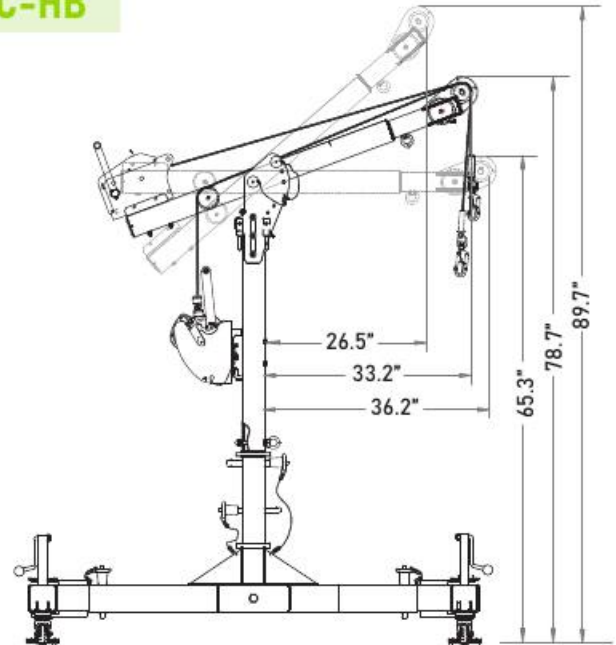

Features

Assembles into 3 main components tool-free depending on the configuration.	Multiple anchorage points for rescue operations.
Compatible with various fixed and portable bases.	360-degree swiveling capability with a removable locking pin.
Adjustable cantilever arm with 3 height positions.	Pre-installed mounting brackets for winch and retrieval systems.

Design Specifications

Mounting Option	Non-Penetrating H-Base	Dimensions	65½" L x 55¼" W x 68" H
Material	High Strength Aluminum Alloy	User Capacity	310 lbs
Finish	Powder Coated	Breaking Strength	15 kN

*Optional components for the Davit System are not included and depend on the specific system, determined by the user's requirements at the time of purchase.




www.frontlinefall.com info@frontlinefall.com
6 Lee Blvd, Malvern, PA 19355

SPEC SHEET

Confined Space Davit Arm System with Non-Penetrating H-Base



DAC-HB

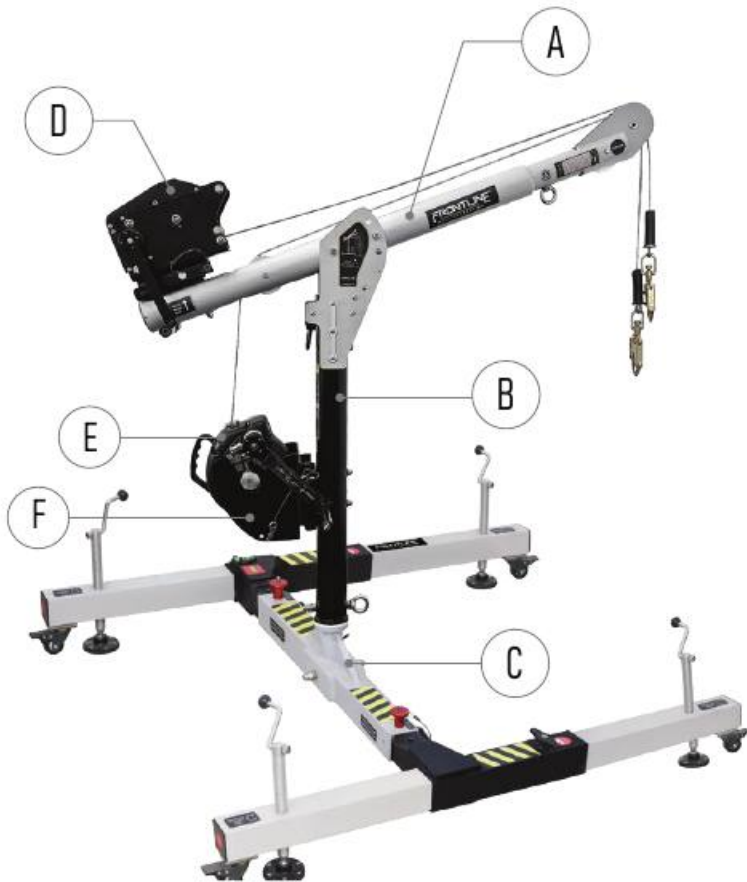

Relevant Standards

OSHA	1926
	1910
ANSI	Z359.18

Cantilever Arm Positions

Position	Height	Reach
Upper	26"	91"
Middle	33"	80"
Lower	36"	68"

KIT COMPONENTS

SKU	Weight	DAC-36BOOM	DAC-54MAST	DAC-HBASE	WINCH	3-WAY	3-WAY BRACKET
DAC-HB	71.8 lbs	✓	✓	✓	●	●	●
DAC-HB-WINCH	97.8 lbs	✓	✓	✓	✓	●	●
DAC-HB-WINCH-3 WAY	129.8 lbs	✓	✓	✓	✓	✓	✓



www.frontlinefall.com info@frontlinefall.com
6 Lee Blvd, Malvern, PA 19355