

# SPEC SHEET

## Internal Shock Absorbing Lanyard



LIS61S

### Features

1.57" Polyester tubular webbing incorporated with energy absorber

Both sides textile loops with Steel Stamped Snap Hook

### Hardware Components

Material Alloy steel, Zinc Plated

Min. Breaking Strength 5,000 lbs.

Finish Shot Blasted

### Webbing Specifications

Material Polyester

Width 1.57"

Breaking Strength 6,000 lbs.

Stitching Thread High-Tenacity Polyester

Weight 2.5 lbs

Max. Capacity 310 lbs


### Relevant Standards

ANSI Z359.13-2013

A10.32-2004

OSHA 1926

1910

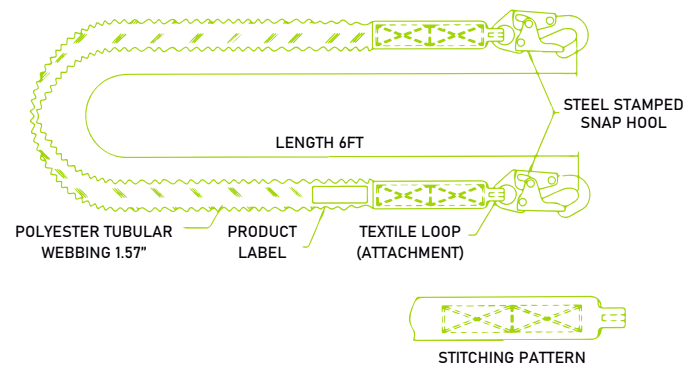

**FRONTLINE**  
FALL PROTECTION

www.frontlinefall.com info@frontlinefall.com

6 Lee Blvd, Malvern, PA 19355