



SPEC SHEET

LIS62RA Elasticated Internal Shock Absorbing Lanyard

Design Specifications

"Y" Shaped 1.57" wide polyester tubular elasticated webbing incorporated with internal energy absorber

Hook Components


Rebar Hooks	Aluminum
Min. Breaking Strength	5,000 lbs.
Finish	Shot Blasted

Webbing Specifications

Material	Polyester
Width	1.57"
Min. Breaking Strength	6,000 lbs.
Stitching Thread	High-Tenacity Polyester
Contracted	4.5 ft.
Expanded	6.0 ft.
Max. Capacity	310 lbs

Relevant Standards

ANSI	Z359.13-2013
	A10.32-2004
OSHA	CFR 1926.502
	CFR 1910.140

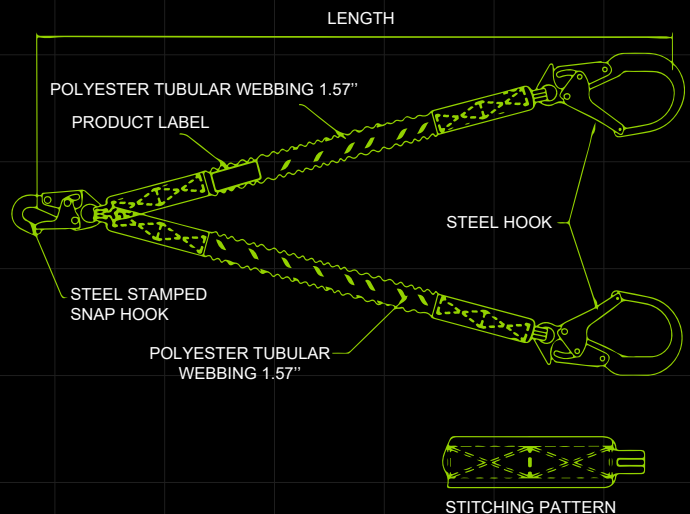

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



info@frontlinefall.com

www.frontlinefall.com