



SPEC SHEET

LIS62S Combat Twin Leg 6' Snap-hook Lanyard with Internal Shock Absorber

Design Specifications

"Y" Shaped Lanyard

Incorporated energy absorber

Material Specifications

Webbing Polyester

Webbing Width 1.75"

Length 6'

Stitching Thread High-Tenacity Polyester

Connectors Material Alloy Steel, Zinc Plated

Connectors Finish Shot Blasted

Weight 6 lbs

ANSI Performance Specifications

Webbing Breaking Strength 6,000 lbs

Connectors Breaking Strength 5,000 lbs

Max Capacity 310 lbs


Relevant Standards

ANSI Z359.13-2013

A10.32-2004

OSHA CFR 1926.502

CFR 1910.140

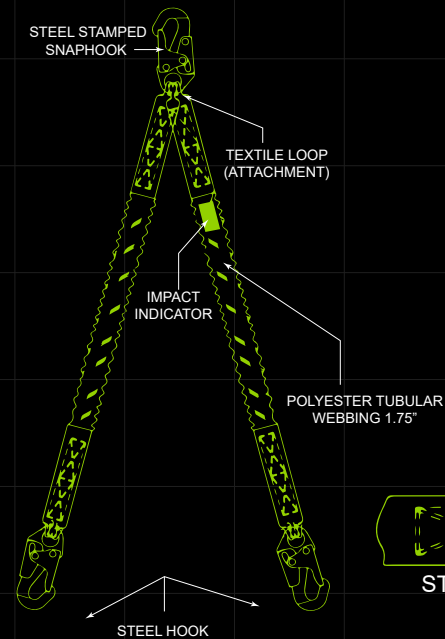

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



info@frontlinefall.com

www.frontlinefall.com