SPEC SHEET


Overhead Tripod Anchor


OTP21


Features
Swiveling boom that rotates with a small force to follow the worker across the work area
Bolted 3-Leg Base that fastens directly to the concrete slab for a stable, fully anchored footprint
Tripod base and mast separate for easier transport, handling and storage
Temporary or permanent installation fully reusable, relocates to a new slab as the work moves

Design Specifications	
Minimum Breaking Strength	5,000 lbs (22.2 kN)
User Capacity	310 lbs
Weight	± 374 lbs
Finish	Powder Coated Safety Green
Material	ASTM Rated Steel

Relevant Standards	
OSHA	1910
	1926

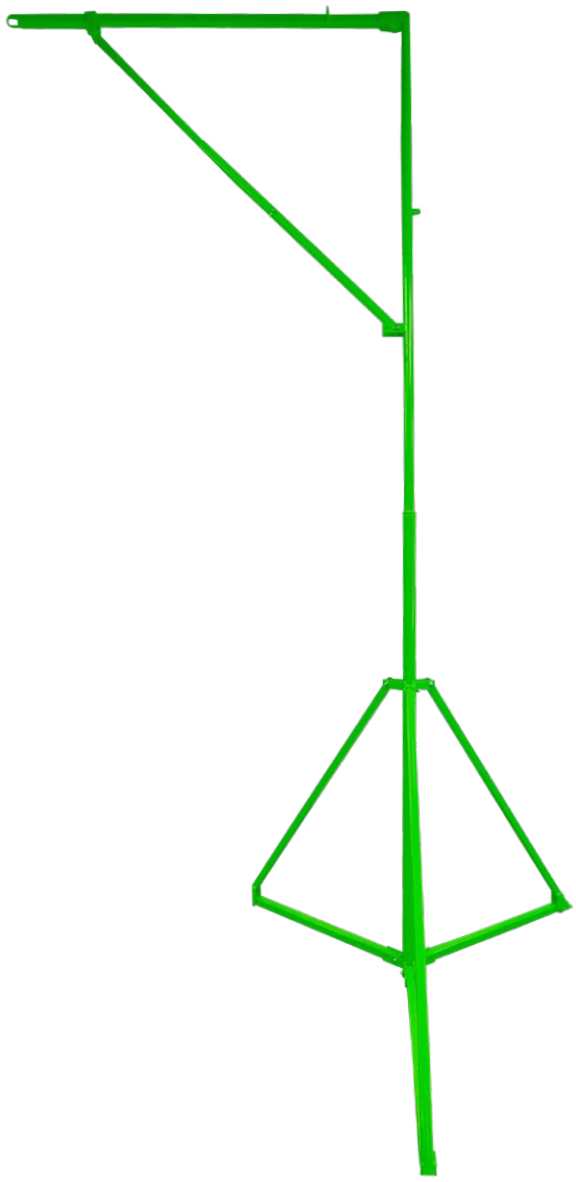

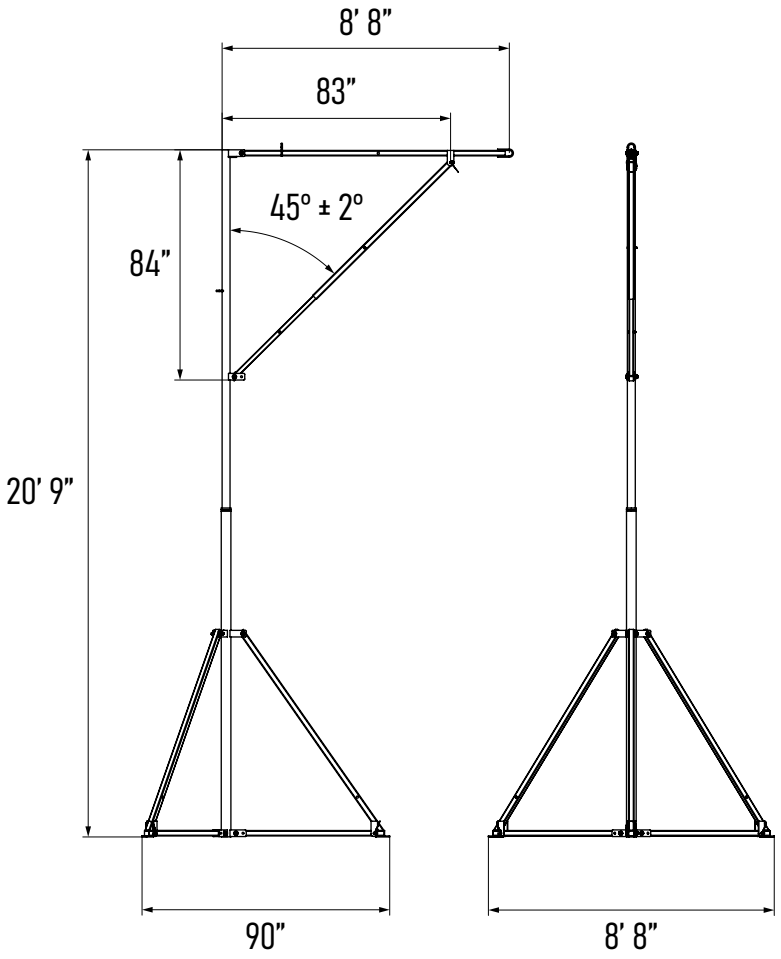

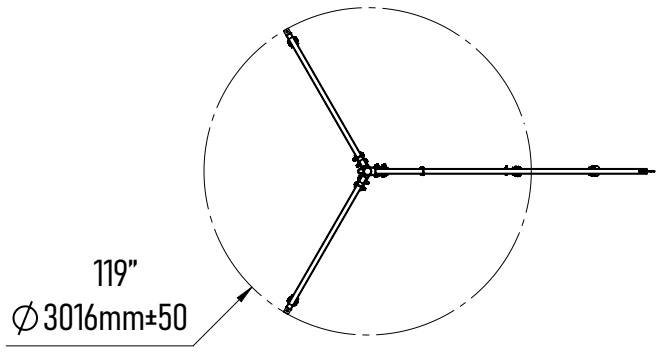

FRONTLINE FALL PROTECTION

www. frontlinefall.com info@frontlinefall.com

6 Lee Blvd, Malvern, PA 19355