



SPEC SHEET

RPGLE Leading Edge Cable SRL with Steel Snap Hook End

Design Specifications



| | |
|---------------------|------------------------|
| Cable | 7/32" Galvanized Steel |
| Lengths | 25' - 50' |
| Casing | Heavy-Duty Polymer |
| Anchorage Connector | Swivel Eye |
| Connector | Swivel Steel Snap Hook |
| Gate Strength | 3,600 lbs. |

Available Lengths

| | |
|-------|---------------------|
| 25 ft | 11.35 lbs (5.14 kg) |
| 50 ft | 21 lbs (9.5 kg) |

ANSI Performance Specifications

| | |
|------------------------------|-------------|
| Connector Strength | 5,000 lbs. |
| Max. Capacity | 310 lbs. |
| Max. Arrest Distance | 42" CLASS 2 |
| Avg. Arrest Force | 1,350 lbs. |
| Cable Min. Breaking Strength | 3,400 lbs. |

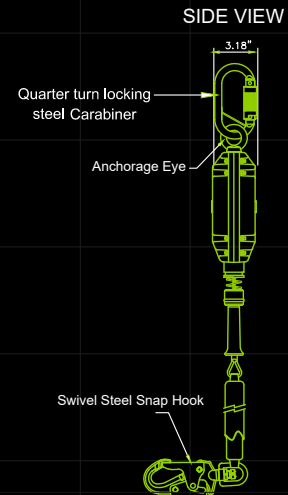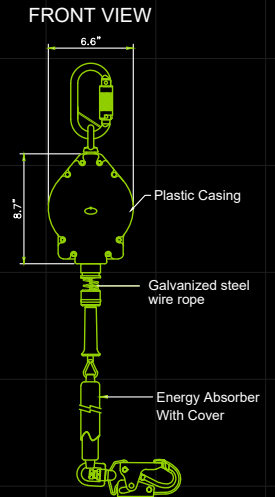

Relevant Standards

| | |
|------|--------------|
| OSHA | CFR 1926.502 |
| | CFR 1910.140 |
| ANSI | Z359.14-2021 |
| | A10.32-2012 |

WARNINGS:

- Do not skip user instructions supplied with this product.
- Alteration or misuse of this product or failure to follow instructions may lead to serious injury or even death.



info@frontlinefall.com

www.frontlinefall.com