

REUSABLE ROOF ANCHOR


Trust in the high-quality fall protection systems offered by Malta Dynamics and reap the benefits of safety and support with this Galvanized Steel Reusable Roof Anchor on hand at your next job site. This reusable anchorage connector is designed for temporary use on wood rooftops and fits all roof pitches from flat to 12/12.

The thick-plated, galvanized steel construction offers a longer lasting product life and the fall protection your workers need with a worker capacity range of 130 to 310 lbs. This reusable roof anchor includes all necessary fasteners and can be easily installed using screws or nails. This reusable roof anchor meets or exceeds the safety-oriented requirements of OSHA and ANSI.

KEY FEATURES

1. Pre-drilled hole layout for easy install
2. Reliable D-Ring anchor points
3. Adjustable pitch to match a variety of rooftops

- Lightweight and durable
- Fasteners Included
- Can be installed with screws or nails
- Discrete and low profile design
- Fits up to 12/12 roof pitch
- For temporary use on wood rooftops

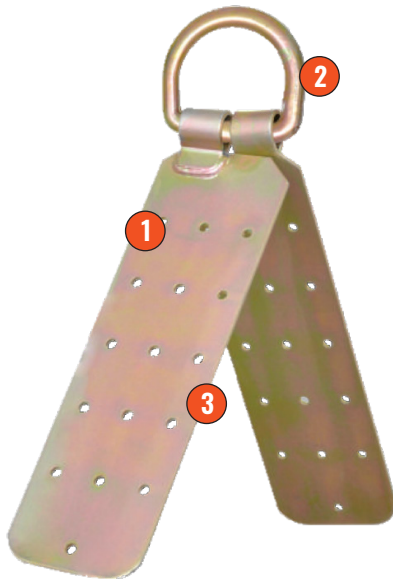

PERFORMANCE SPECIFICATIONS

Worker Capacity Range	130-310 lbs. Max
Minimum Breaking Strength	5,000 lbs. Max

MATERIALS SPECIFICATIONS

Anchor	Galvanized Steel
Dimensions	21" x 3"

FALL PROTECTION STANDARDS

OSHA	1926 Subpart M, 1910
ANSI	Z359.1:2007, A10.32-12

PART #	PACK	WEIGHT
A6303	1	2.4 lbs.