
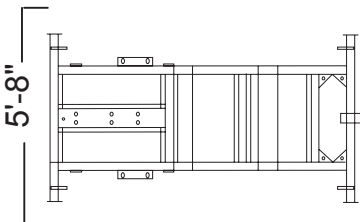
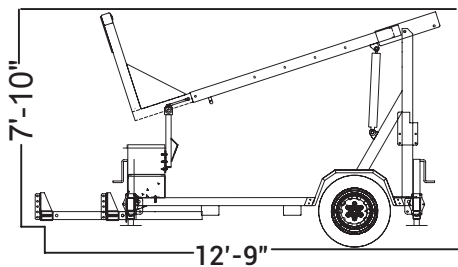


X1000

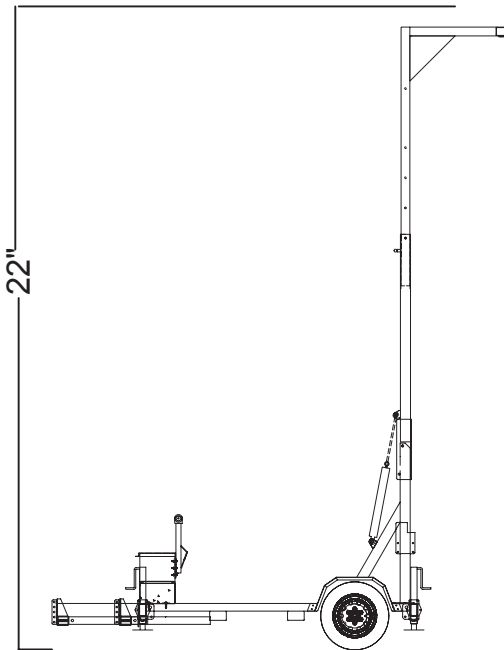

| Safety Standards | |
|----------------------------|------------------------------|
| OSHA Fall Arrest Standards | |
| General | |
| Max. Working Height | 22' |
| Min. Working Height | 17' |
| Max. Folded Height | 7'-10" |
| Frame Width | 5'-8" |
| Overall Length | 12'-9" (with tongue removed) |
| Total Weight | 2200 lbs. (approximately) |
| Max. Anchor Point capacity | 310 lbs. |
| Max. Allowable Users | 2 |
| Towing | |
| Max. Towing Speed | Posted High way Speed |
| Tires | 225/75/R15 Radials |
| Receiver | 2-5/16" Ball |
| Trailer Plug Wiring | 4-Pole Blade Style lead |
| Operation | |
| Actuating Method | Manual Hydraulic system |
| Hydraulics | |
| Fluid Type | Mobil DT10 Excel 22 |

*SRLs not included.