



Fall Protection Catalog – USA



INTRODUCTION

Elevating worker safety.

YOUR SAFETY IS OUR PRIORITY

That's why Miller® offers you a comprehensive range of fall protection solutions that meet the highest standards of quality and performance.

Whether you need harnesses, lanyards, lifelines, anchors, connectors, or accessories, we have the right product for your specific application. Our products are designed to be comfortable, durable, and easy to use, so you can focus on your work without compromising your safety.

But we don't stop at products.

We also provide you with the training, support, and service you need to make the most of your fall protection investment. From online courses and webinars to on-site instruction and certification, we have the resources to help you develop your skills and knowledge. And if you have any questions or concerns, our experts are ready to assist you with their technical expertise and industry experience.

At Miller, we are committed to helping you achieve your goals while protecting you from the hazards of working at height. We believe that nothing is impossible when you have the right tools and the right attitude.

You can reach new heights of excellence — ask us how.



ABCs OF FALL PROTECTION

A	Anchorage Connectors & System Kits	
	Temporary Anchorage Connectors	11
	Permanent Anchorage Connectors	15
	Mobile Anchorage Connectors	17
	Horizontal Lifeline Kits	19
	Vertical Climbing System Kits	29
	Roofing	39
B	Body Wear	
	Harness Features	41
	General Application	42
	Welding and Arc Flash	62
	Specialty	68
	Accessories	67
C	Connecting Devices	
	Self-Retracting Devices (SRD)	79
	Rope Grabs and Vertical Lifelines	85
	Lanyards	87
	Positioning/Restraint Lanyards	96
D	Descent/Rescue & Confined Space	
	Rescue and Confined Space	98
E	Engineered Solutions	
	Miller Engineered Solutions	116
	Horizontal Lifeline (HLL) Systems	117
	Guardrail Safety Systems	119
	Rigid Rail Systems	120
F	Fall Protection & Prevention Training	
	Training Courses	122
G	Glossary	
	Glossary of Terms	130
I	Index	
	SRD Index	132

PERSONAL FALL ARREST SYSTEM

Three key components of the Personal Fall Arrest System (PFAS) must be in place and properly used to provide maximum worker protection.

Individually, these components will not provide protection from a fall. However, when used properly and in conjunction with each other, they form a PFAS that becomes vitally important to safety on the jobsite.

A ANCHORAGE/ ANCHORAGE CONNECTOR

Anchorage

Commonly referred to as a tie-off point (Ex: I-beam)

Anchorage Connector

Used to join the connecting device to the anchorage (Ex: beam anchor)

B BODY WEAR

The personal protective equipment worn by the workers (Ex: full body harness)

C CONNECTING DEVICE

The critical link which joins the body wear to the anchorage/ anchorage connector (Ex: self-retracting lifeline or shock-absorbing lanyard)

D



DESCENT AND RESCUE

Working extreme heights in confined spaces and in changing weather conditions may present many challenges. Descent and rescue devices are used to raise or lower a fallen worker to safety.



SIX EASY STEPS THAT COULD SAVE YOUR LIFE

HOW TO DON A HARNESS

1



Hold harness by back D-ring. Shake harness to allow all straps to fall in place.

2



If chest, leg, and/or waist straps are buckled, release straps and unbuckle at this time.

3



Slip straps over shoulders so D-ring is located in middle of back between shoulder blades.

4



Pull leg strap between legs and connect to opposite end. Repeat with second leg strap. If belted harness, connect waist strap after leg straps.

5



Connect chest strap and position in midchest area. Tighten to keep shoulder straps taut.

6



After all straps have been buckled, tighten all buckles so that harness fits snug but allows full range of movement. Pass excess strap through loop keepers.

INSPECTION AND MAINTENANCE HARNES INSPECTION



WEBBING

Grasp the webbing with your hands 6 in to 8 in apart. Bend the webbing in an inverted "U" as shown. The resulting surface tension makes damaged fibers or cuts easier to detect. Follow this procedure the entire length of the webbing, inspecting both sides of each strap. Look for frayed edges, broken fibers, pulled stitches, cuts, burns, and chemical damage.




D-RINGS/BACK PADS

Check D-rings for distortion, cracks, breaks, and rough or sharp edges. The D-ring should pivot freely. Inspect for any unusual wear, frayed or cut fibers, or broken stitching of the D-ring attachments. Pads should also be inspected for cracks, excessive wear, or other signs of damage.



BUCKLES

Inspect for any unusual wear, frayed or cut fibers, or broken stitching of the buckle attachments. Inspect the buckle for distortion. The outer bars and center bars must be straight. Pay special attention to corners and attachment points at the center bar.

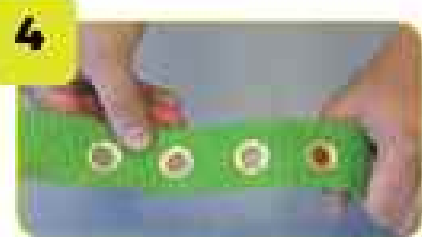

TONGUE BUCKLES/GROMMETS

Buckle tongues should be free of distortion in shape and motion. They should overlap the buckle frame and move freely back and forth in their socket. Roller should turn freely on frame. Check for distortion or sharp edges. Inspect for loose, distorted, or broken grommets. Webbing should not have additional punched holes.



QUICK-CONNECT BUCKLES

Inspect the buckle for distortion. The outer bars and center bars must be straight. Make sure dual-tab release mechanism is free of debris and engages properly.



HARNES FALL INDICATORS

Inspect fall arrest indicators (located on the back D-ring pad) for signs of activation. Remove from service if broken or stretched between any of the four (4) pairs of arrows.



INSPECTION TAG

Inspect fall arrest indicators for signs of activation. Remove from service if broken or stretched. Please refer to owner's manual for more information on fall indicators.

INSPECTION AND MAINTENANCE SELF-RETRACTING DEVICE INSPECTION

1. CHECK HOUSING

Before every use, inspect the unit's housing for loose fasteners and bent, cracked, distorted, worn, malfunctioning, or damaged parts.

2. LIFELINE

Test the lifeline retraction and tension by pulling out the entire lifeline and allow to retract back into the unit. Always maintain a light tension on the lifeline as it retracts.

The lifeline should pull out freely and retract all the way back into the unit. Do not use the unit if the lifeline does not retract. The lifeline must be checked regularly for signs of damage. Inspect for cuts, burns, corrosion, knots, frays, or worn areas. Inspect any sewing (web lifelines) for loose, broken, or damaged stitching.

3. BRAKING MECHANISM

The braking mechanism can be tested by grasping the lifeline above the load indicator and applying a sharp steady pull downward which will engage the brakes. There should be no slippage of the lifeline while the brakes are engaged. Once tension is released, the brakes will disengage and the unit will return to the retractable mode. Do not use the unit if the brakes do not engage.

Every Miller Self-Retracting Device will be equipped with one of the following load impact indicators and must be checked by the instructions below; do not use the unit if the load impact indicator has been activated.

Webbing Load Indicator

A fold down into the webbing lifeline above the snap hook serves as the impact indicator. A warning flag is included and will be exposed should the lifeline be subjected to fall arresting forces.

Swivel Snap Load Indicator

The snap hook load impact indicator is built into the swivel part of the snap hook. The swivel eye will elongate and expose a red area at the location illustrated when subjected to fall arrest forces.

Load Indicator from Shock Absorber Pack

Miller Turbolite™ Edge and applicable Turbolite™ Hot Flash PPL are equipped with a load indicator built into the shock absorber pack. When subjected to fall arrest forces the internal white energy absorber will become exposed or deploy as shown or the pin may show damage or fracture.

4. SNAP HOOK/CARABINER/REBAR HOOK

The connector gate (keeper) should seat into the nose without binding and should not be distorted, obstructed or damaged. The gate spring should exert sufficient force to firmly close the gate. The gate locking mechanism must prevent the gate from opening when closed. For swivel connectors the swivel should operate smoothly.

CLEANING

Basic care of all safety equipment will prolong the durable life of the unit and will contribute toward the performance of its vital safety function.

Proper storage and maintenance after use are as important as cleansing the equipment of dirt, corrosives, or contaminants. Storage areas should be clean, dry, and free of exposure to fumes or corrosive elements.

1. Nylon or Polyester

Remove all surface dirt with a sponge dampened in plain water. Squeeze the sponge dry. Dip the sponge in a mild solution of water and commercial soap or detergent. Work up a thick lather with a vigorous back-and-forth motion, then wipe with a clean cloth. Hang freely to dry, but away from excessive heat.

2. Housing

Periodically clean the unit using a damp cloth and mild detergent. Towel dry the equipment and allow it to dry completely without exposing it to heat, steam, or prolonged sunlight.



INSPECTION AND MAINTENANCE

LANYARD INSPECTION


1



HARDWARE: SNAPS

Inspect closely for hook and eye distortions, cracks, corrosion, or pitted surfaces. The keeper (latch) should seat into the nose without binding and should not be distorted or obstructed. The keeper spring should exert sufficient force to firmly close the keeper. Keeper locks must prevent the keeper from opening when the keeper closes.

2

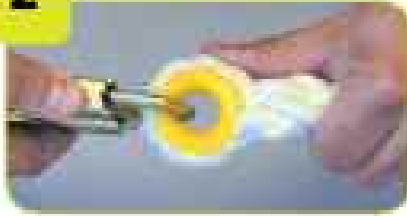

HARDWARE: THIMBLES

The thimble must be firmly seated in the eye of the splice, and the splice should have no loose or cut strands. The edges of the thimble must be free of sharp edges, distortion, or cracks.


3



WIRE ROPE LANYARD

Always wear gloves when inspecting a wire rope lanyard; broken strands can cause injury. While rotating the wire rope lanyard, watch for cuts, frayed areas, or unusual wearing patterns on the wire. Broken strands will separate from the body of the lanyard.

4

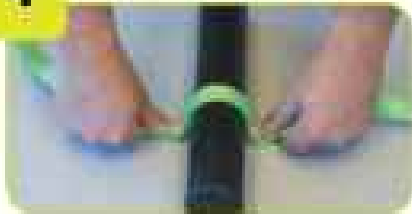

WEB LANYARD

While bending webbing over a pipe or mandrel, observe each side of the webbed lanyard. This will reveal any cuts, snags, or breaks. Swelling, discoloration, cracks, and charring are obvious signs of chemical or heat damage. Observe closely for any breaks in stitching. Inspect lanyard warning flag for signs of activation.

5



ROPE LANYARD

Rotate the rope lanyard while inspecting from end-to-end for any fuzzy, worn, broken, or cut fibers. Weakened areas from extreme loads will appear as a noticeable change in original diameter. The rope diameter should be uniform throughout, following a short break-in period.

6



SHOCK ABSORBER PACK

The outer portion of the pack should be examined for burn holes and tears. Stitching on areas where the pack is sewn to D-rings, belts, or lanyards should be examined for loose strands, rips, deterioration, or other signs of activation.

At Miller, we believe that nothing is impossible when you have the right tools and the right attitude.



Anchorage Connectors and System Kits

A

Temporary Anchorage Connectors

Cross-Arm Cable Chain	11
Disposable Concrete Anchor Straps	12
Concrete D-Bells	12
Beam Anchors	12
Wye Hook Anchor	13
Cable Anchorage Connectors	13
Spreader Slings	13
Extension Pole and Hook Anchors	14
Beam Clamps	14
Carabiners	14

Permanent Anchorage Connectors

Mounted D-rings	15
Beam Trolley	15
D-ball Anchors	15
Miller Fusion® Roof Post	16

Mobile Anchorage Connectors

Miller Edge™	17
Miller SkyORB™ Overhead Rotational Boom Anchor	18

Horizontal Lifeline Kits

Rapid Restraint Kit	19
Miller SkyGrip™	20
For concrete applications	20
For steel applications	21
Various anchorage options (D-ball, Grip, Cross-Arm, Beam Anchors)	22
SkyGrip® Stainless Steel Permanent Horizontal Lifeline Kits	23
SkyGrip® Galvanized Cable Permanent Horizontal Lifeline Kits	24
SkyGrip® Stainless Steel Permanent Horizontal Lifeline Kits	24
Miller TechLine™ Temporary Horizontal Lifeline Kits	25
Miller ShockFusion™ Horizontal Lifeline Roof System Kits	26
Miller Xosch® Permanent Horizontal Lifeline System Kits	27
Miller Xosch® Permanent Horizontal Lifeline System Kits Replacement Parts	28

Vertical Climbing System Kits

Miller Vn-Go™ Ladder Climbing System Kits (Cable)	29
Miller GideLoc™ Ladder Climbing System Kits (Rail)	32
Fixed Ladder Safety System with Top Bracket and SRL	36

Roofing

Temporary Roof Anchors	39
Permanent Roof Anchors	39
Miller Single D	39
Miller Double D	39
Miller Claw	39

ANCHORAGE CONNECTORS AND SYSTEM KITS

TEMPORARY ANCHORAGE CONNECTORS

Anchorage connectors are designed as the intermediary for securing a connecting device to an anchorage. Careful consideration should be given to selecting a proper anchorage for ultimate safety. The anchorage should be easily accessible, located a safe distance above any lower obstacles, and support 5,000 lb per worker.

CROSS-ARM ANCHORAGE CONNECTORS


Explore our selection of Cross-Arm Anchorage Connectors, designed to provide reliable support and stability for a variety of structural applications.

400 lb maximum capacity

SKU	Description	Material
8180/22INGN	Scaffold short choker 22 in	Nylon
8183/2FTGN	2-ft model	Nylon
8183/3FTGN	3-ft model	Nylon
8183/4FTGN	4-ft model	Nylon
8183/5FTGN	5-ft model	Nylon
8183/6FTGN	6-ft model	Nylon
8183/8FTGN	8-ft model	Nylon
8183/12FTGN	12-ft model	Nylon
8183/15FTGN	15-ft model	Nylon
8183/20FTGN	20-ft model	Nylon
8183/25FTGN	25-ft model	Nylon
8184/3FTGN	3-ft model with wear pad	Nylon
8184/6FTGN	6-ft model with wear pad	Nylon
8185/2FTGN	2-ft model	Nylon
8185/3FTGN	3-ft model	Nylon
8185/4FTGN	4-ft model	Nylon
8185/5FTGN	5-ft model	Nylon
8185/6FTGN	6-ft model	Nylon
T7314/3FTAF	Titan 3-ft model	Polyester
T7314/4FTAF	Titan 4-ft model	Polyester
T7314/6FTAF	Titan 6-ft model	Polyester
8185K/2FTBK	2-ft model	Kevlar
8185K/3FTBK	3-ft model	Kevlar
8185K/6FTBL	6-ft model	Kevlar



8180/22INGN



8183/3FTGN



8185/6FTGN



440/6FT

CROSS-ARM CHAIN ANCHOR

The 6-ft chain anchor provides a single user with an easy-to-install, temporary anchorage connector. It easily wraps around I-beams or other structures. This product safely wraps around corners and sharp edges and is ideal to use in environments where chemical, heat, or welding splatter may occur.

400 lb maximum capacity

SKU	Description
440/6FT	6-ft model



11

ANCHORAGE CONNECTORS AND SYSTEM KITS

TEMPORARY ANCHORAGE CONNECTORS

DISPOSABLE CONCRETE ANCHOR STRAP

Uniquely designed to provide temporary anchorage on concrete forms. Constructed of 1-3/4 in wide, abrasion-resistant webbing.

SKU	Description
8185C/2FTGN	Concrete anchor strap with steel D-ring 2-ft model
8185C/3FTGN	Concrete anchor strap with steel D-ring 3-ft model
8185C/4FTGN	Concrete anchor strap with steel D-ring 4-ft model



8185C/3FTGN

CONCRETE D-BOLT ANCHORAGE CONNECTOR

417C/ includes a 5/8-in stud-type expansion anchor that is ideal for applications with concrete and lightweight concrete that meet required specifications, min 13.8 MPa (2,000 psi). Can be installed on a vertical wall or overhead for versatility. Concrete Expansion Bolt (417CBOLT/) available separately.

SKU	Description
417C/	Concrete D-bolt Anchorage Connector with hardware
417CBOLT/	Concrete expansion bolt



417C/

MILLER SHADOW®

Lightweight Sliding and Fixed Adjustable Beam Anchors

Miller Shadow Sliding and Fixed Adjustable Beam Anchors connect horizontally to a wide range of I- and H-beam flanges from 3-in to 24 in wide and up to 2-1/2-in thick. Once attached, the beam anchor (SKUs 8814 and 8816) slides along the beam with the worker to provide increased safety, mobility, and productivity.

The fixed beam anchors (SKU 8815) are designed to be tightened horizontally or vertically, firmly gripping the beam or column to provide a temporary or permanent anchorage attachment.



8815-12/



8816-14/

SKU	Application	Description	Fits Flange Size	Maximum Flange Thickness
8814-12/	Horizontal	Sliding Shadow Beam Anchor – stainless steel & high-strength aluminum	4 in to 12 in	1-1/4 in
8814-24/	Horizontal	Sliding Shadow Beam Anchor – stainless steel & high-strength aluminum	12 in to 24 in	2-1/2 in
8815-12/	Vertical/Horizontal	Fixed Beam Anchor – stainless steel & high-strength aluminum	4 in to 12 in	1-3/4 in
8815-24/	Vertical/Horizontal	Fixed Beam Anchor – stainless steel & high-strength aluminum	12 in to 24 in	2-1/2 in
8816-14/	Horizontal	Sliding ShadowLife® Beam Anchor – high-strength aluminum & bronze A-2 b	3 in to 14 in	1-1/4 in

ANCHORAGE CONNECTORS AND SYSTEM KITS

TEMPORARY ANCHORAGE CONNECTORS

WIRE HOOK ANCHOR

The stainless steel wire hook connects to various approved anchorages. Simply squeeze the spring-loaded hook and slip the large opening over the approved structure. 400 lb maximum capacity.

SKU	Description
410/	Can accommodate up to approx 3-1/2 in wide by approx 6-in structural member



410/

CABLE ANCHORAGE CONNECTOR

The Cable Anchorage Connector creates quick, easy and secure anchorage attachment. Constructed of 1/4-in vinyl-coated, galvanized cable and a 3-in steel O-ring, 400 lb maximum capacity.

SKU	Description
WITH STEEL LOCKING SNAP HOOK WITH 3/4-IN GATE OPENING	
8186V-2T/3FTV	3-ft cable
8186V-2T/4FTV	4-ft cable
8186V-2T/6FTV	6-ft cable
8186V-2T/10FTV	10-ft cable
WITH STEEL CAPTIVE EYE CARABINER WITH 1-IN GATE OPENING	
8187W/3FTV	3-ft cable
8187W/4FTV	4-ft cable
8187W/6FTV	6-ft cable
8187W/8FTV	8-ft cable
8187W/10FTV	10-ft cable



8186V-2T/4FTV



8187W/6FTV

Cable cross arm 3/8-in stainless steel wire rope and two zinc-plated steel O-rings

SKU	Description
SSRLTRK	4-ft cable



SSRLTRK

SPECTRA SLINGS

North® Spectra® Slings are used as anchorage connectors for fall arrest and travel restraint applications. The slings must be used in accordance with proper fall protection methods and are designed for personnel fall arresting only.

Spectra Fiber is a polyethylene-based fiber and is the lightest and strongest of man-made fibers. It will withstand high load strains; it floats, and exhibits superior resistance to chemicals, water and ultraviolet light.

SKU	Description
FP242/4	4-ft sling
FP242/6	6-ft sling



FP242

ANCHORAGE CONNECTORS AND SYSTEM KITS

TEMPORARY ANCHORAGE CONNECTORS

EXTENSION POLE AND HOOK ANCHORS

The 20-ft fiberglass pole and spring-loaded hook is ideal for use with climbing ladders and towers. Installs fall arrest systems up to 20 ft from ground level to angle iron, piping, and related structures. 400 lb maximum capacity.

SKU	Description
475/	Extension pole with anchor hook
475-1/	Anchor hook only
475-2/	Anchor extension pole only

BEAM CLAMPS

The Beam Clamp is a steel anchor point that can be attached to horizontal I-beams, S-beams, or W-beams. Its bevel attachment ring prevents twisting of the worker's connecting device. 400 lb maximum capacity.

SKU	Description
450/	Accommodates beams with a maximum width of 9 in.
455/	Accommodates beams with a maximum width of 11-1/2 in.

CARABINERS

400 lb maximum capacity

SKU	Description
17D-1/	Double-action twist-lock carabiner, steel, 1-in gate opening
17D-1PIN/	Double-action twist-lock carabiner, steel, 1-in gate opening w/captive eye pin
17D-2-27/	Double-action twist-lock carabiner, aluminum, 1-in gate opening
17D-3-27/	Triple-action twist-lock carabiner, aluminum, 3/8-in gate opening
18D-1/	Double-action twist-lock carabiner, steel, 2-in gate opening
18D-2-27/	Double-action twist-lock carabiner, aluminum, 2-in gate opening
18D-1-PIN ONLY/	Captive eye pin only for 18D-1/
SSRLC	Double-action twist-lock carabiner, stainless steel, 3/4-in gate opening



475/



455/



17D-1/

17D-2-27/

17D-3-27/

18D-1/


18D-2-27/

ANCHORAGE CONNECTORS AND SYSTEM KITS

PERMANENT ANCHORAGE CONNECTORS

MOUNTED D-RING

SKU	Description
410/	Steel D-ring anchor with mounting bracket, 400 lb maximum capacity. For use by ONE person only.

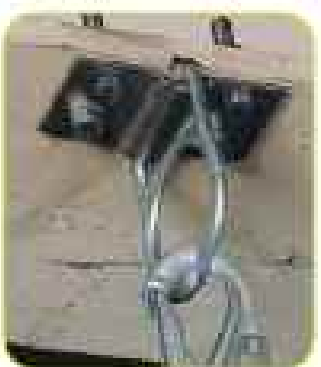

410/

BEAM TROLLEY

Adjustable and slides along with the worker to provide maximum mobility. 400 lb maximum capacity.

SKU	Description
9065/BK	Beam trolley adjusts to fit beam flanges from 3 in to 4-1/2 in wide.

LIGHTWEIGHT BEAM TROLLEY PHOTOFIT KITS

9065-1/	Kit converts 9065/BK beam trolley to accommodate I-beams up to 8-3/2 in wide.
9065-2/	Kit converts 9065/BK beam trolley to accommodate I-beams up to 12 in wide.



9065/BK

D-BOLT ANCHORS

Anchorage connectors are designed as the intermediary for securing a connecting device to an anchorage. The anchorage should be easily accessible, located a safe distance above any lower obstacles and support 5,000 lb per worker. 400 lb maximum capacity.

SKU	Description
415/	D-bolt anchor for up to 3/4-in working thickness, includes a 1/2-in diameter bolt with lockwasher and nut.
416/	D-bolt anchor for up to 4-in working thickness, includes a 5/8-in diameter bolt with lockwasher and nut.
416SS/	Stainless steel D-bolt anchor for up to 4-in working thickness, includes a 5/8-in diameter bolt with lockwasher and nut.
417/	D-bolt anchor accommodates 5/8-in fastener, without hardware.
417SS/	Stainless steel D-bolt anchor, without hardware.
418/	D-bolt anchor for up to 4-in working thickness, includes a 3/4-in diameter bolt with lockwasher and nut.
419/	D-bolt anchor accommodates 3/4-in fasteners without hardware.



415/



416/

ANCHORAGE CONNECTORS AND SYSTEM KITS

PERMANENT ANCHORAGE CONNECTORS

MILLER FUSION™

Roof Anchor Post

- Permanent or temporary solution for roof safety
- Versatile single-point anchor adapts to a wide range of roof designs
- Protects worker by maintaining a secure connection to the structure
- Protects the structure with a unique energy-absorbing load distribution system

SKU	Description	
X10000	Standing Seam Roofing	Standing seam spacing from 11-3/4 in to 17 in
X10001	Standing Seam Roofing	Standing seam spacing from 11-3/4 in to 21-25 in
X10002	Standing Seam Roofing	Standing seam spacing from 11-3/4 in to 24 in
X10010	Metal Sheathing Roofing	Metal sheathing with minimum thickness of 24 gauge (0.024 in)
X10011	Metal Sheathing Roofing	Metal sheathing with minimum thickness of 24 gauge (0.024 in) Trapwood spacing of 8 in to 20 in, one-inch increments
X10030	Membrane/Built-up Roofing	Fastens through membrane, insulation, and into metal sheathing, wood sheathing, or concrete with a combined thickness of 8 in to 20 in
X10031	Membrane/Built-up Roofing	Fastens through membrane, insulation, and into metal sheathing, wood sheathing, or concrete with a combined thickness of 5.5 in to 10.5 in
X10032	Multi-Purpose Roofing	With Miller approved hardware, accommodates metal sheathing with minimum sheathing, wood and thickness of 24 gauge (0.024 in), trapwood spacing of 8 in to 20 in, concrete roofing in 1-in increments. No hardware included. Plywood with minimum thickness 5/8-in CDX (no hardware included), concrete decking with minimum thickness of 6-1/2 in & minimum concrete compressive strength of 3000 PSI
X10040	Wood Sheathing Roofing	Wood sheathing roofing plywood with minimum thickness of 5/8-in CDX (temporary installations only)
X10050	Multi-Purpose/Concrete Roofing	Concrete decking with minimum thickness of 6-1/2 in and minimum concrete compressive strength of 3000 PSI



Standing Seam



Metal Sheathing



Membrane/Built-up



Multi-Purpose

ANCHORAGE CONNECTORS AND SYSTEM KITS

MOBILE ANCHORAGE CONNECTORS

MILLER EDGE™

Fall Protection System

The first and only cost-effective, portable, engineered anchorage solution designed to protect workers engaged in leading edge deck construction. The Miller Edge System reduces the need for a safety monitor or a temporary cable lifeline system on leading edge deck construction.

- Freestanding, mobile overhead anchor point
- Solid wheel casters
- Two integral eye-bolt attachment points accommodate self-retracting lifelines
- Predetermined integral lifting points
- Heavy-duty steel construction with protective enamel paint
- Easy access handles on front and rear
- Applications: concrete deck construction, bridge decks, window washing, vault entry, rescue situations



9081/


SKU	Description
9081/	Miller Edge System 7-1/2-ft anchorage height
9081/9.5FT	Miller Edge System 9-1/2-ft anchorage height
Replacement Parts	
9081/BF	Replacement brake jack - front
9081/BR	Replacement brake jack - rear
9081/HANDLE	Replacement handle - edge
9081/LABELS/	Edge replacement labels
9081/LMRMB/	Loading edge mounting bracket
9081/PADKIT/	Pad replacement kit for front brake jack
9081/PIN	Replacement pin - edge
9081/WF	Replacement front wheel
9081/WR	Replacement rear wheel, only one (1) wheel
9081/WD/300LB	Edge counter weight
9081/SPIKES	Replacement spikes for rear brake jacks

TECHNICAL INFORMATION

Smooth surface with +.5% slope
Maximum working distance 26-ft forward
12-ft forward to each side
Frame painted steel
Althane high strength swivel casters, non-marking
Chip resistant, non-moister absorbing
Safety yellow enamel paint
Black rubber foot, high strength
Plated steel push pin
Total system weight 1650 lb

CERTIFICATION

Max. working load 310 lb per attachment point
Can only be shipped by flatbed truck

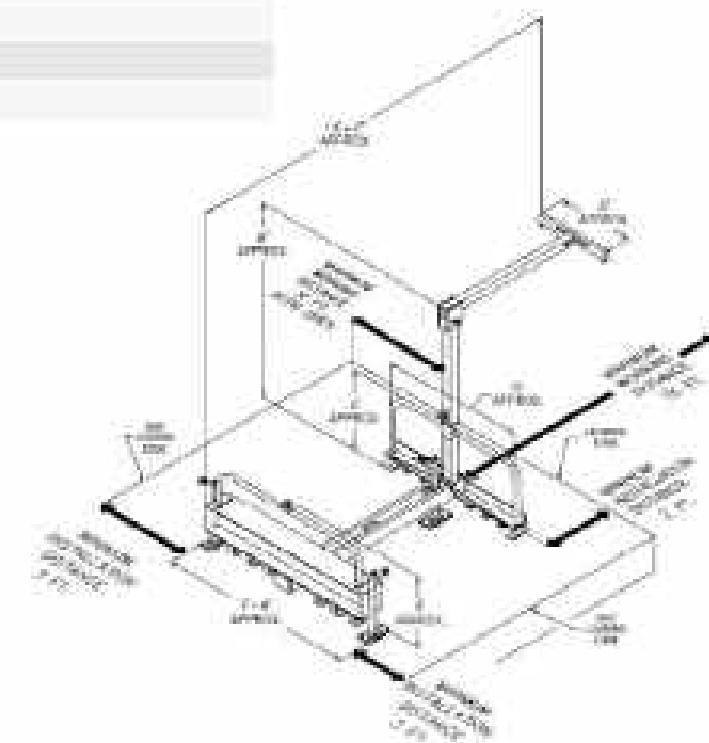

ANCHORAGE CONNECTORS AND SYSTEM KITS

MOBILE ANCHORAGE CONNECTORS

MILLER SKYORB™

Overhead Rotational Boom Anchor

The SkyORB Overhead Rotational Boom Anchor provides a safe overhead anchorage that is designed specifically for use around vehicles, utilizing the vehicle weight to secure the anchor for proper fall arrest, eliminating the need for heavy and bulky counter weights. The SkyORB Anchor is a pre-engineered system that replaces the need for very expensive, custom engineered, fixed overhead anchor systems.

- Provides workers with an easy and quick connection with their fall arrest system while working at height
- Designed to eliminate the need for heavy and bulky counter weights by utilizing vehicle weight to safely secure the system in place
- Weighing only 1,050 lb, it is significantly lighter than competitive systems on the market
- The adjustable telescoping mast allows the height of the system to be varied from 14 ft to 20 ft to accommodate lower roofs and overhead obstacles
- Features a boom that rotates 360°, allowing it to be easily positioned above the worker's head, minimizing free-fall distance and swing fall
- Patented energy absorbing technology reduces forces on the system
- Modular design is easy to assemble and transport using only a forklift



SKU	Description	Weight	Crate Dimensions* L x W x H
SORBSYS	Cable assembly kit, base, mast, and boom	1,510 lb*	221 in x 40 in x 19 in
SORBCABLEKIT	Shock absorber cable assembly/replacement kit (includes cable with swaged ends, two (2) shock absorbers, a cleat and pin, and one (1) carabiner)	8 lb	22 in x 6 in x 4 in

SKU	Description
SORBCRATE	SkyORB crate
SORBHWOOM	SkyORB hardware kit with boom
SORBHWPIN	SkyORB hardware kit with boom pins
SORBHWRACE	SkyORB hardware kit with bracing
SORBHWHOCK	SkyORB hardware kit with shock
SORBHWMAST	SkyORB hardware kit with mast
SORBHWPINS	SkyORB hardware kit with mast pins

*Shipping weight displayed. Product weight is 1,050 lb. Dimensions displayed reflect measurements of the crate for shipping purposes.

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

RAPID RESTRAINT KIT

Working on elevated work surfaces (EWS) like industrial-sized HVAC chillers present multiple fall hazards. When located on a rooftop near an unprotected edge, simply approaching the chiller may expose the technician to the risk of falling. Since the working height is greater than 4 ft, some means of fall protection is required per OSHA 1910. Introducing the Miller Rapid Restraint Kit.

BENEFITS

Easy to set-up

- Allows technician to set-up system easily and quickly (as little as 10 minutes*)
 - Easy set-up allows technicians to stay productive in the field
 - Components can be easily transported by technician to the work area (kit is supplied with a practical backpack)
- *As tested internally

User friendly and intuitive

- Adjustment points are readily accessible
- Ease of adjustment allows technicians to reach broad work areas
- Easy body positioning (i.e., kneeling, standing, work on elevated surfaces)

Compliant

- The Rapid Restraint Kit meets all applicable OSHA 1926 (subpart M) and OSHA 1910 standards for fall protection.

SKU	Description
3012-4016-001	Rapid Restraint Kit

THE KIT INCLUDES:

- Restraint line 30 ft
- Rope grabs
- Cross-arm straps
- Adjustable-rope lanyards
- Carabiners
- Backpack
- Instruction manual



ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER SKYGRIP™

Temporary Horizontal Lifeline Systems

- Designed for easy installation on steel and concrete applications
- Interchangeable stanchion posts enable systems to be used for steel or concrete applications maximizing investment and increasing versatility
- Above-the-beam quick installation and adjustment for increased safety
- Stainless steel energy absorber minimizes fall clearance
- Tension indicator ensures proper tensioning, which is critical to calculating fall clearance
- Continuous pass-through design provides 100% tie-off connection with multi-span systems
- Lightweight, compact, and provides easier handling, installation, and storage
- Durable zinc-plated steel construction provides corrosion resistance for increased durability and longer service life

FOR CONCRETE APPLICATIONS

Miller SkyGrip Temporary Horizontal Lifeline Systems for concrete applications feature unique stanchion adjustment that allows the anchorage to be repositioned minimizing obstruction and increasing safety.


- Uniquely designed for angled adjustment – swings out of the way when placing deck pans between beams (common in bridge construction)
- Slider bracket tensions tie-back chain to minimize fall clearance
- Bases can be positioned parallel or perpendicular to the beam
- Three methods of attachment include **V-Grip rebar attachments, anchor bolts, and precast inserts.**

Complete system includes stanchions, tie-back brackets, chain connectors, slide brackets, energy absorber(s), line tension indicator, turnbuckle, cable, and hardware.

SKU	Description	Number of Stanchions	Pass-through Brackets for Intermediate Stanchions	Number of Energy Absorbers	Workers per System
SGC/30FT	30-ft system	2	No intermediate stanchions	1	2
SGC/60FT	60-ft system	2	No intermediate stanchions	1	2
SGC/120FT	120-ft system	3	1	2	4
SGC/180FT	180-ft system	4	2	2	6
SGC/240FT	240-ft system	5	3	2	6
SGC/300FT	300-ft system	6	4	2	6

COMPONENTS FOR CONCRETE APPLICATIONS

SKU	Description
SGC	Concrete stanchion w/base and V-Grip rebar attachment assemblies
SGCB	Base and V-Grip rebar attachment assemblies
SGCA	Set of two (2) tie back brackets (includes V-Grip rebar attachment assemblies), two (2) chain connectors, two (2) slide brackets and hardware
SGCT	Combination clamp & turnbuckle
SGSH	Intermediate pass-through kit

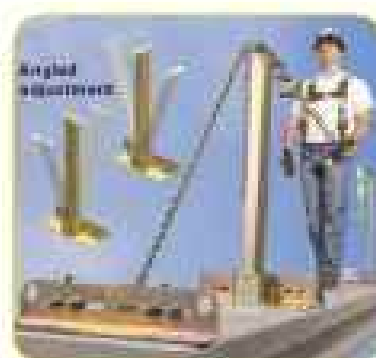

Rebar 4 to 22
Rebar spacing 4 in to 22 in



V-Grip rebar attachment
Rebar size 4 to 22 Rebar spacing 4 in to 22 in



Anchor bolts
(Purchased separately)



Precast inserts
(Purchased separately)

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

FOR STEEL APPLICATIONS

Miller SkyGrip Temporary Horizontal Lifeline Systems for steel applications are compact and lightweight for easy installation, while providing greater user mobility for increased productivity.

- Two base/crossbar adjustment systems accommodate wide range of steel beam sizes
- Low-profile crossbar reduces trip hazard
- Quick grip above-the-beam adjustment allows for easy one-person installation and dismantling, increasing safety and productivity
- For applications where the beam flange is up to 2-1/4 in thick and 12 in to 36 in wide

Complete system includes stanchions, energy absorber(s), line tension indicator, turnbuckle, cable, and hardware.

HORIZONTAL LIFELINE KIT WITH STANDARD BASE – FITS BEAM FLANGES 4 IN TO 28 IN WIDE AND UP TO 2-1/4 IN THICK

SKU	Description	Number of Stanchions	Pass-through Brackets for Intermediate Stanchions	Number of Energy Absorbers	Workers per System
SGS18/30FT	30-ft system	2	No intermediate stanchions	1	2
SGS18/60FT	60-ft system	2	No intermediate stanchions	1	2
SGS18/120FT	120-ft system	3	1	2	4
SGS18/180FT	180-ft system	4	2	2	6
SGS18/240FT	240-ft system	5	3	2	6
SGS18/300FT	300-ft system	6	4	2	6

HORIZONTAL LIFELINE KIT WITH LARGE BASE – FITS BEAM FLANGES 4 IN TO 36 IN WIDE AND MIN 2 IN TO MAX 3-3/8 IN THICK


SKU	Description	Number of Stanchions	Pass-through Brackets for Intermediate Stanchions	Number of Energy Absorbers	Workers per System
SGS36/30FT	30-ft system	2	No intermediate stanchions	1	2
SGS36/60FT	60-ft system	2	No intermediate stanchions	1	2
SGS36/120FT	120-ft system	3	1	2	4
SGS36/180FT	180-ft system	4	2	2	6
SGS36/240FT	240-ft system	5	3	2	6
SGS36/300FT	300-ft system	6	4	2	6

COMPONENTS FOR STEEL APPLICATIONS

SKU	Description	Beam Flange Width	Beam Flange Thickness
SGS18	Stanchion w/standard base	4 in to 18 in	2-1/4 in
SGS36	Stanchion w/large base	12 in to 36 in	2-1/4 in to 3-3/8 in
SGSB18	Standard base	4 in to 18 in	2-1/4 in
SGSB36	Large base	12 in to 36 in	2-1/4 in to 3-3/8 in
SGSEXT18	Standard ext. bar w/adjuster	4 in to 18 in	2-1/4 in
SGSEXT36	Large extension bar w/adjuster	12 in to 36 in	2-1/4 in to 3-3/8 in



Pre-8000 model

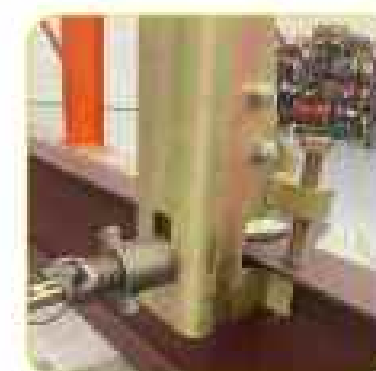

Stanchion installation complete

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS


Additional Applications

- Large extension bar can be used with standard base
- Once a stanchion/base assembly has been completely installed and secured to the beam given the required specifications, a worker may use the stanchion as an anchor point for one person (steel application only)
- The SkyGrip steel system can be installed perpendicular to the support beams when tie-back assembly kit is used. (Part number SGCA)

Contact your Miller Fall Protection representative if you need any support.

COMPONENTS FOR BOTH STEEL AND CONCRETE APPLICATIONS

SKU	Description
SGP-HS	Stanchion post
SGH	Intermediate pass-through kit
SGX	SkyGrip stainless steel energy absorber
SGXK	SkyGrip stainless steel energy absorber kit w/ tension indicator and two (2) shackles and hardware
SGXK-FS	SS tensioner w/ shock absorber
SGSEXTPIN	Extension bar replacement pin
SGTB	Turnbuckle 5/8 inch
SGTB-FS	SS turnbuckle
SGTI	Tension Indicator
SGVG	V-Clip/Rebar clamp assembly kit
SGW	Double saddle wire rope clip
SGW-FS/SS	SS double saddle wire rope clip

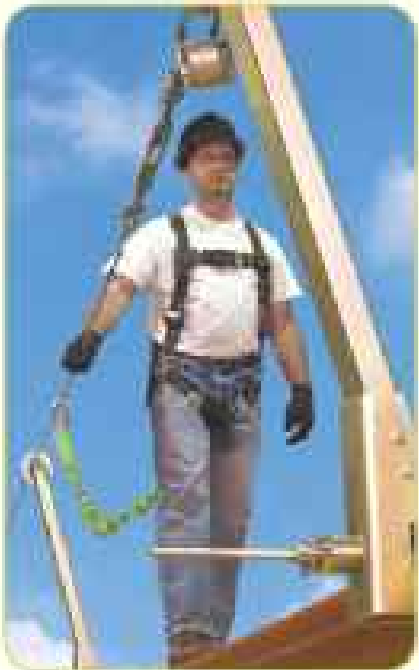

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER SKYGRIP


GALVANIZED CABLE HORIZONTAL LIFELINE SYSTEM KITS

A Miller SkyGrip Cable Lifeline may be used in conjunction with approved Miller brand anchorage connectors to provide a temporary horizontal lifeline system that is quick and easy to install.



Miller D-bolt Anchors

May be installed to approved structures to provide a temporary or permanent anchorage




Using D-bolt anchors



Miller Cross-Arm Straps

Conveniently wrap around I-beams and other structures to form secure points of attachment



Using cross-arm straps



Miller Fixed Beam Anchors

Connect both horizontally and vertically to beams or columns. A durable, spring-loaded, positive-lock engagement pin ensures proper installation



Using fixed beam anchors

SKU	Description
SG416/30FT	30-ft kit w/ two SKU 416/ D-bolt anchors
SG416/60FT	60-ft kit w/ two SKU 416/ D-bolt anchors
SG416/90FT	90-ft kit w/ two SKU 416/ D-bolt anchors
SG416/120FT	120-ft kit w/ two SKU 416/ D-bolt anchors
SG417/30FT	30-ft kit w/ two SKU 417/ D-bolt anchors, does not include anchor hardware
SG417/60FT	60-ft kit w/ two SKU 417/ D-bolt anchors, does not include anchor hardware
SG8183-10/60FT	60-ft kit w/ two SKU 8183/10FTON 10-ft cross-arm strap
SG8815-12/30FT	30-ft kit w/ two SKU 8815-12/ Fixed beam anchors
SG8815-12/60FT	60-ft kit w/ two SKU 8815-12/ Fixed beam anchors
SG8815-24/60FT	60-ft kit w/ two SKU 8815-24/ Fixed beam anchors
SGXK	Galv. energy absorber kit includes SS coil shock absorber, galv. tension indicator, two (2) galv. anchor shackles & galv. hardware
SGXK-FS	SS energy absorber kit includes SS coil energy absorber, SS tension indicator, two (2) SS anchor shackles & SS hardware
416/	Galv. D-bolt anchor, 5/8-in hole for hardware, 5/8-in dia. x 5-in long galv. bolt w/ nut & washer
417/	Galv. D-bolt anchor, 5/8-in hole for hardware, does not include hardware

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

STAINLESS STEEL HORIZONTAL LIFELINE SYSTEM KITS

Miller SkyGrip Stainless Steel Permanent Horizontal Lifeline Systems Kits are designed for quick, easy installation in corrosive environments. A variety of innovative features have been engineered into these systems, making them extremely user friendly with enhanced safety considerations.

- Single span systems – spans adjust up to 60 ft and accommodate up to two workers (no intermediate bracket required)
- Multi-span systems – max two workers per 60 ft max span, up to 6 total workers on systems over 60 ft
- Compact and lightweight – provides for easier handling and installation
- Ideal for corrosive environments – designed for petrochemical, pharmaceutical, food processing, outdoor, and off-shore applications



SKU	Description	Anchorage Connector
SGLLK-PS/20FT	20-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SGLLK-PS/30FT	30-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SGLLK-PS/40FT	40-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SGLLK-PS/60FT	60-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SGLLK-PS/120FT	120-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SGLLK-PS/150FT	150-ft SS lifeline, four (4) SS anchor shackles, turnbuckle, cable clamps, tension indicator, thimble, & energy absorber	D-bolt with hardware not included
SG416-PS/30FT	30-ft SS lifeline kit (SGLLK-PS/30FT), two (2) 416SS D-bolt anchors	D-bolt with hardware included
SG416-PS/60FT	60-ft SS lifeline kit (SGLLK-PS/60FT), two (2) 416SS D-bolt anchors	D-bolt with hardware included
SG416-PS/120FT	120-ft SS lifeline kit (SGLLK-PS/120FT), two (2) 416SS D-bolt anchors	D-bolt with hardware included
SG417-PS/30FT	30-ft SS lifeline kit (SGLLK-PS/30FT), two (2) 417SS D-bolt anchors	D-bolt included, anchor hardware not included
SG417-PS/60FT	60-ft SS lifeline kit (SGLLK-PS/60FT), two (2) 417SS D-bolt anchors	D-bolt included, anchor hardware not included
SG00K-PS	SS energy absorber kit with SS tension indicator (two (2) SS anchor shackles & SS hardware)	-
416SS/	SS D-bolt anchor 5/8 in hole for hardware, 5/8 in dia x 5 in long SS bolt w/out A washer	-
417SS/	SS D-bolt anchor 5/8 in hole for hardware, does not include anchor hardware	-

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER TECHLINE™

TEMPORARY HORIZONTAL ROPE LIFELINE SYSTEM KITS

A premium temporary horizontal rope lifeline system for two workers. The black static kernmantle lifeline provides ultimate durability for tough environments while reducing fall clearance requirements. An in-line system shock absorber reduces forces while D-ring connections allow for ease of mobility. The systems are quick and easy to install, lightweight, and portable.

- Low-stretch rope lifeline for better performance/less deflection
- Kit accommodates two workers
- Lightweight kit, easy to carry
- Quick and easy to install for increased productivity
- Cross-arm anchorage straps for easy installation
- Connecting D-rings for greater mobility
- Shock absorber pack reduces fall arrest forces
- Designed so anchorage points only need to be rated for 5,000 lb
- Rope lifeline adjuster to accommodate required length (Standard tools required for tensioning, not included)
- Bucket for safe storage



SKU	Description	Kit Contents
HLLR2-27/30FT	30-ft Rope Temporary HLL System	1 1/2-in Kernmantle style rope lifeline 30-ft working length, lifeline adjuster, 2 heavy-duty cross-arm straps 10 ft, shock absorber pack, 2 connecting D-rings and 5 gal bucket
HLLR2-27/60FT	60-ft Rope Temporary HLL System	1 1/2-in Kernmantle style rope lifeline 60-ft working length, lifeline adjuster, 2 heavy-duty cross-arm straps 10 ft, shock absorber pack, 2 connecting D-rings and 5 gal bucket
HLLR2-L/30FT	30-ft Rope Temporary HLL System	1 1/2-in Kernmantle style rope lifeline 30-ft working length, lifeline adjuster, shock absorber pack, 2 connecting D-rings and 5 gal bucket. No cross arm straps included
HLLR2-L/60FT	60-ft Rope Temporary HLL System	1 1/2-in Kernmantle style rope lifeline 60-ft working length, lifeline adjuster, shock absorber pack, 2 connecting D-rings and 5 gal bucket. No cross arm straps included
HLLCS/10FT	Replacement 10 ft cross-arm strap	-



ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER SHOCKFUSION™

Horizontal Lifeline Kits for Rooftop Safety

A variety of do-it-yourself Miller ShockFusion Horizontal Lifeline (HLL) Kits for rooftop safety are now available and offer the same innovative energy absorbing design as a custom ShockFusion System. The new kits are designed for simple straight-line configurations and can be rated for one to four users depending on the application.

The kits feature the ability to pass through the intermediate maintaining 100% connection along the length of the full system. All Miller ShockFusion HLL Kits are designed to minimize deflection in the lifeline while effectively managing system forces to maintain a safe connection to a variety of roof structures. The unique mounting system makes installation quick and easy while reducing labor costs.

Contact the Miller Engineered Solutions team for assistance and pricing of kit systems:

MESservices@PIPGlobal.com

Note: If your application does not meet the requirements of a kit style system, please contact the Miller Engineered Solutions team to explore options for a custom engineered system:

MESservices@PIPGlobal.com



ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER XENON™ HORIZONTAL LIFELINE KITS


Xenon Horizontal Lifeline Kits – Straight-Line Kits

Straight-line kits can be installed by contractors and customers without the need for a certified installer. A variety of kit lengths are available with maximum intermediate spans of 30 ft and will accommodate one to four users depending on the configuration. The kits feature the ability to pass through the intermediate maintaining 100% connection along the length of the full system. Kits must be installed at an elevation that can be reached by the users, typically 5-ft to 7-ft above the walking working surface.

All Miller Xenon HLL Kits are designed to minimize deflection in the lifeline while effectively managing system forces to maintain a safe connection to the supporting structure.

Note: If your application requires the HLL to be mounted at a height above the users reach or does not meet the other requirements of a kit style system, please contact the Miller Engineered Solutions team to explore options for a custom engineered system:

MESservices@PIPGlobal.com

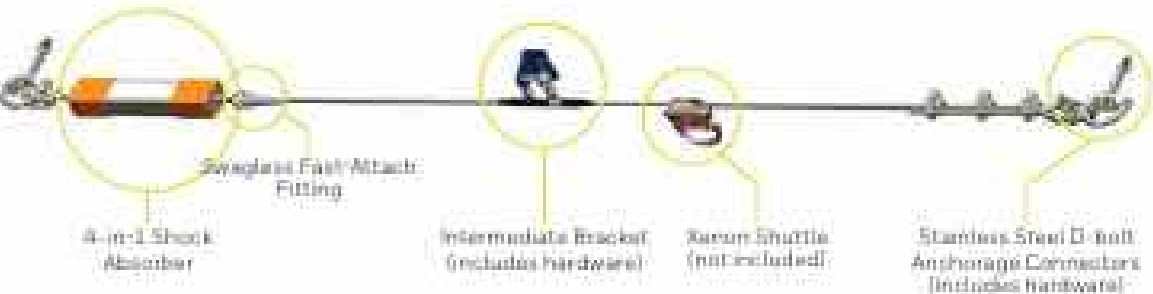

MILLER XENON™ HORIZONTAL LIFELINE KITS

SKU	System Length	Number of Intermediate Brackets
X00030	30 ft	0
X00060	60 ft	1
X00090	90 ft	2
X00120	120 ft	3
X00150	150 ft	4
X00180	180 ft	5
X00210	210 ft	6
X00240	240 ft	7
X00270	270 ft	8
X00300	300 ft	9
X00330	330 ft	10
X00360	360 ft	11
X00390	390 ft	12
X00420	420 ft	13
X00450	450 ft	14
X00480	480 ft	15
X00510	510 ft	16

Longer length available, contact MESservices@PIPGlobal.com

Xenon shuttle sold separately (X005100)

Each kit includes one (1) shock absorber for one to two users. Additional shock absorber needed for three to four users (79 ft, J4353). Additional intermediate brackets can be added to shorten cycle in sub-span rated to create additional support points (1010006).

ANCHORAGE CONNECTORS AND SYSTEM KITS

HORIZONTAL LIFELINE KITS

MILLER XENON HORIZONTAL LIFELINE KITS REPLACEMENT PARTS


SKU	Title	Description
1005709	Xenon Shuttle	Self-aligns for smooth automatic pass-through of intermediate brackets; dual-locking mechanism for added safety.
RP1057	Cable Pulley	Cable pulley for use with a single span Xenon HLL (30 ft) placed at an elevation out of reach from the user. Limited to use with smaller 3MDS (PF-1s) only.
XC00060	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 60 ft.
XC00120	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 120 ft.
XC00150	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 150 ft.
XC00180	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 180 ft.
XC00210	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 210 ft.
XC00240	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 240 ft.
XC00270	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 270 ft.
XC00300	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 300 ft.
XC00330	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 330 ft.
XC00360	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 360 ft.
XC00390	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 390 ft.
XC00420	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 420 ft.
XC00450	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 450 ft.
XC00480	Cable Lifeline	5/16-in diameter SS, 7x7 wire-rope, 480 ft.
FPH_24353	Xenon 4-in-1 Shock Absorber	4-in-1 unit absorbs energy to reduce system forces; includes a humpback mechanism for easy tensioning; fall indicator to show someone has fallen; compact design allows for immediate correction for added workability.
1013720	Fast Attach Fitting	Provides for easy installation of cable; requires no specialty welding tools.
1010608	Intermediate Support Bracket with Hardware	Intermediate support bracket allows for free floating or locked positioning and easy passage of Xenon shuttle; includes 1/2-in x 3-in long stainless steel bolt, nut and washer.
FPH_23498	Intermediate Support Bracket	Intermediate support bracket allows for free floating or locked positioning and easy passage of Xenon shuttle (Hardware not included).
XP00001	Shuttle (L)	Stainless steel thimble.
XP00002	Cable Clip (P)	5/16-in wire-rope clip.
SGAS-SS	Anchor Shackles (L)	2/28-in stainless steel shackle with bolt nut and cotter pin.
416SS7	Stainless Steel D-bolt Anchorage Connector with Hardware	Can be mounted on a vertical surface or overhead for added versatility; includes 5/8-in diameter x 5-in long stainless steel bolt with nut & washer.
417SS7	Stainless Steel D-bolt Anchorage Connector	Features 5/8-in hole for hardware; can be mounted on a vertical surface or overhead for added versatility. (Hardware not included).
23949	Plastic Guide	5/16-in intermediate plastic guide (Installation tool not included).
FPH_22624	Plastic Guide Installation Tool	Installation tool for replacement plastic intermediate bracket guides (FPH_23949).



23949



417SS7



1005709



RP1057



FPH_24353



1013720



1010608



FPH_23498



416SS7

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER VI-GO™ VERTICAL CABLE SYSTEM

Ladder Climbing Systems

The VI-Go Vertical Cable system provides the ultimate safety with continuous fall protection when climbing fixed ladders. Systems are available in easy-to-install kits or as a build your own option.

Benefits of the System

- Accommodates up to four workers at a time
- Includes multiple components to perfectly adapt to almost any ladder
- Available with 3/8-inch cable (galvanized or stainless steel) components
- OSHA, ANSI, CSA, and EN standards (depending on the configuration)
- VC500 Fall Arrester glides easily through intermediate brackets; uninterrupted hands and feet are free for climbing

VC500 FALL ARRESTERS

FPH_VC510

Sturdy and Effective Fall Arrester



FPH_VC570

The Choice for Global, Demanding Users



Sold Separately – One Shuttle per Climber		
Part Number	Cable Size	Standards
FPH_VC510	3/8-in galvanized and stainless steel	ANSI 14.3-2008, OSHA 1910.29 / OSHA 1926.502
FPH_VC570	3/8-in galvanized and stainless steel	ANSI Z359.16-2016, OSHA 1910.29 / OSHA 1926.501, CSA Z259.2.5-2017

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER VI-GO SYSTEM KITS

Galvanized Steel	Stainless Steel	Galvanized Steel	Stainless Steel	Cable Length	No. of Intermediate Brackets
Ring Clamp	Ring Clamp	Platform Extension	Platform Extension		
VGG/10FT	VGS/10FT	VGGPE/10FT	VGSPE/10FT	10 ft	0
VGG/20FT	VGS/20FT	VGGPE/20FT	VGSPE/20FT	20 ft	0
VGG/30FT	VGS/30FT	VGGPE/30FT	VGSPE/30FT	30 ft	0
VGG/40FT	VGS/40FT	VGGPE/40FT	VGSPE/40FT	40 ft	0 Standard 1 PE version
VGG/50FT	VGS/50FT	VGGPE/50FT	VGSPE/50FT	50 ft	1
VGG/60FT	VGS/60FT	VGGPE/60FT	VGSPE/60FT	60 ft	1
VGG/70FT	VGS/70FT	VGGPE/70FT	VGSPE/70FT	70 ft	1
VGG/80FT	VGS/80FT	VGGPE/80FT	VGSPE/80FT	80 ft	1 Standard 2 PE version
VGG/90FT	VGS/90FT	VGGPE/90FT	VGSPE/90FT	90 ft	2
VGG/100FT	VGS/100FT	VGGPE/100FT	VGSPE/100FT	100 ft	2
VGG/110FT	VGS/110FT	VGGPE/110FT	VGSPE/110FT	110 ft	2
VGG/120FT	VGS/120FT	VGGPE/120FT	VGSPE/120FT	120 ft	2 Standard 3 PE version

ALL KITS INCLUDE:

- A top bracket, rung clamp or platform extension
- A bottom bracket with universal tensioner
- A top shock absorber (only for stainless steel kits)
- A 3/8-in steel cable lifeline
- Intermediate brackets (quantity as required for the kit)
- All the necessary fasteners
- Identification plate
- Instruction manual

Full arresters and harnesses with front D-ring sold separately.

All the components in the stainless steel kits are made of stainless steel. All the components in the galvanized steel kits are made of galvanized steel, except the intermediate bracket that is made of stainless steel.


Larger installations, up to 500 ft, are possible ordering the spare components with the appropriate length of cable and number of intermediate brackets. Contact the Miller sales specialist for support.

* Picture may vary from galvanized to stainless steel

System with Top Rung Bracket



System with Platform Extension

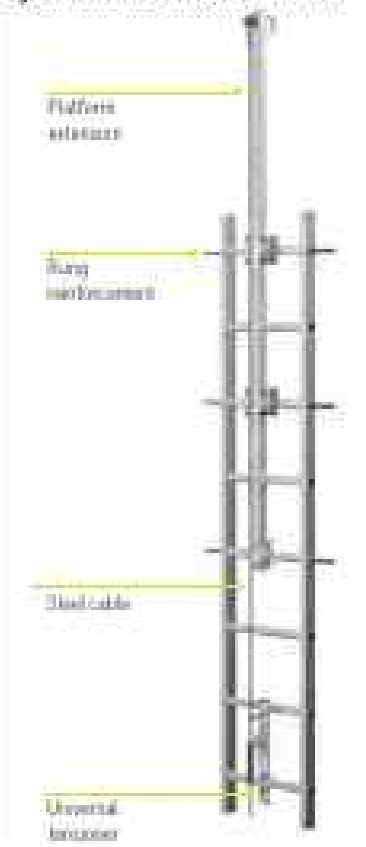


ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER VI-GO SYSTEM KITS

SKU	Description	Material
FPH_24807	Ring clamp, cable fixing clamp fastened directly to ladder rungs using elongated holes to suit different ladder rung distances. For rung profiles 1 in to 1-1/2 in.	Galvanized steel
FPH_24806	Ring clamp, cable fixing clamp fastened directly to ladder rungs using elongated holes to suit different ladder rung distances. For rung profiles 1 in to 1-1/2 in.	Stainless steel
FPH_25051	Platform extension for applications where cables need to extend above the top of the ladder to allow safe access to platform	Galvanized steel
FPH_25846	Platform extension for applications where cables need to extend above the top of the ladder to allow safe access to platform	Stainless steel
FPH_30168	Platform extension cable tensioner with integrated rung bracket and tension indicator for quick installation	Galvanized steel
FPH_30169	Universal tensioner, cable tensioner with integrated rung bracket and tension indicator for quick installation	Stainless steel
VGC-3/8-GS/XXXFT	Sold in 10-ft increments, includes thimble and ferrule	Galvanized steel
VGC-3/8-SS/XXXFT	Sold in 10-ft increments, includes thimble and ferrule	Stainless steel
FPH_25202	Automatic intermediate bracket, fitted to ladder rung to hold the cable in place. For rung profiles 1 in to 1-1/2 in.	Stainless steel
FPH_24839	Fitted to ladder rung to hold the cable in place. For rung profiles 1 in to 1-1/2 in.	Stainless steel
VGIDLABEL/	Laminated identification/inspection tag	Galvanized steel
150084/RMKIT	Rung reinforcement for reinforcement of hollow rungs as in the case when using cable extensions above the ladder	Stainless steel
VGTWC/	Identification tag, can be used as top or bottom cable end terminal for flexibility during installation	Galvanized steel
FPH_30148	Platform extension clamp, additional spare rung clamps to spread the load over more ladder rungs	Stainless steel
FPH_30149	Platform extension clamp, additional spare rung clamps to spread the load over more ladder rungs	Galvanized steel
FPH_30176	Top shock absorber, shock absorber needed only if stainless steel cables are used with legacy bid structure VGC-C, VGS-C, VGS-C, TRCS, TRCS-C, TRCS-XC	Stainless steel

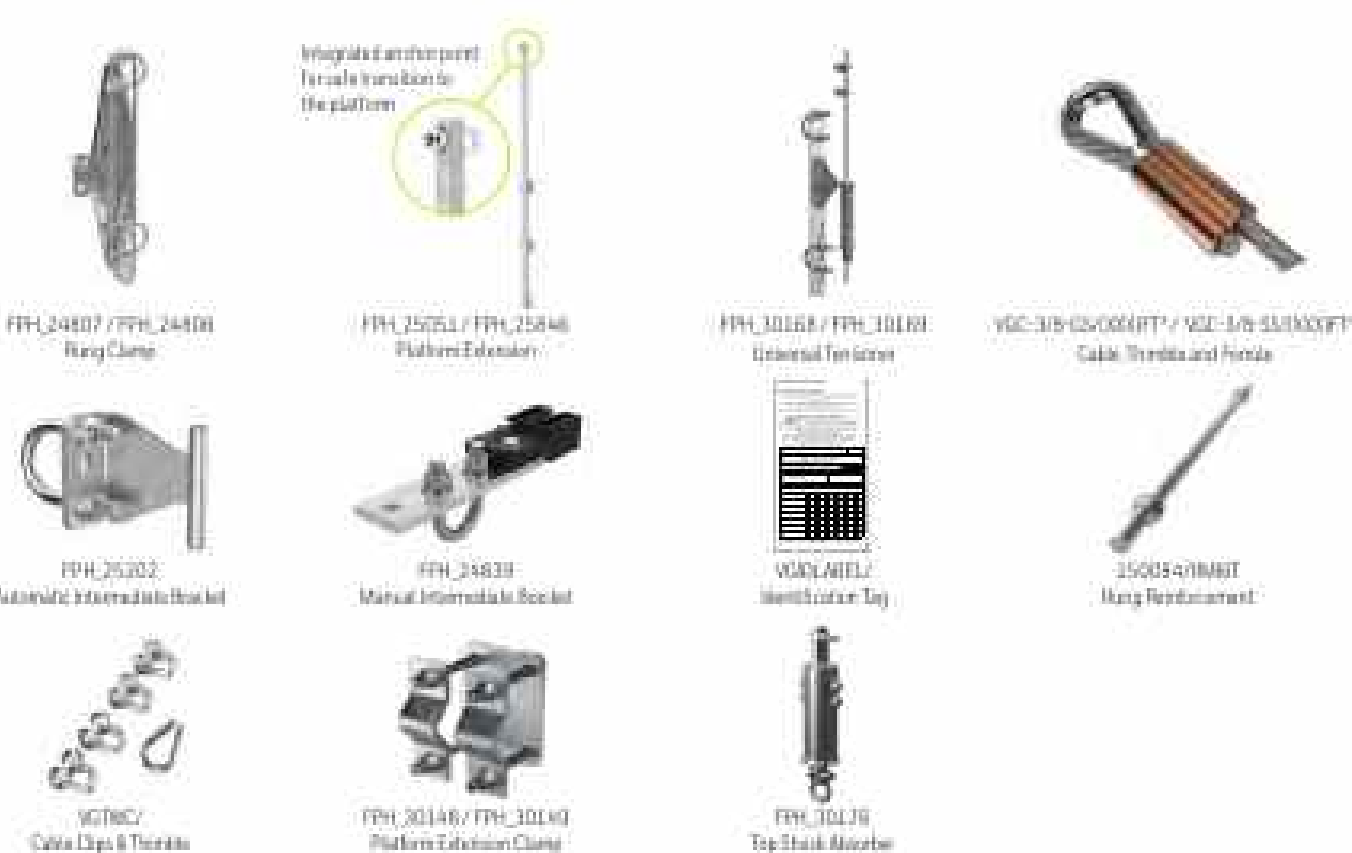

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER GLIDELOC® VERTICAL RAIL SYSTEM

The GlideLoc Vertical Rail System is the state-of-the-art solution to provide safety at height when climbing permanent ladders.

The GlideLoc vertical rail system is designed to withstand the effects of harsh weather conditions and variable temperatures. The design can be adapted to suit different structural requirements thanks to its flexibility and a broad range of accessories.

The system is available in different materials:

- **Hot-dipped galvanized steel** is a cost-effective solution for conventional applications.
- **Stainless steel** is the best solution for harsh environments such as chemical plants, food production, offshore sites, and industrial chimneys.
- **Aluminium** offers a smooth surface and a sleek appearance, while highly resistant to corrosion and distortion. The lightweight design makes the installation easier.

The GlideLoc VR600 series fall arresters are engineered to facilitate effortless climbing for all users, regardless of their experience level or climbing technique.

VR600 FALL ARRESTERS

- Effortless climbing experience
- Minimum static strength is 3600 lb
- Familiar and intuitive connection to the rail through entry points
- Anti-panic features: Secondary independent and automatic locking shuttle
- Integrated RFID for asset management
- Visual fall indicator for ease of inspection
- Tri-lock carabiner with min. 3600 lb brake strength

FPH_VR650

Smooth climb while leaning back or in confined space



FPH VR670

Detachable - can be inserted and removed from rail at any point



Part Number	Description	Standards
FPH_VR650	Detachable at the top or bottom of the rail only	ANSI 14.3-2008 / ANSI Z159.16-2016, OSHA 1910.29 / OSHA 1926.562 / OSHA 1910.140, CSA Z259.2.5-2017
FPH_VR670	Detachable anywhere along the rail at any point	

GlideLoc Fall Arresters and other GlideLoc Vertical Rail System components are designed for use with Miller-approved components only. Substitution or replacement with non-approved component combinations, sub-systems, or parts may affect or interfere with the safe function of each other and endanger the compatibility within the system. This incompatibility may affect the reliability and safety of the total system.

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER GLIDELOC SYSTEM KITS

Systems are available in easy to install kits including:

- Vertical rails (quantity depending on the kit) with splice connection
- Rung clamps for rungs up to 1-1/4-in diameter (FPH_14804 Galv kits or FPH_14813 SS kits) (quantity depending on the kit)
- Two end stops (FPH_26027)
- All the necessary fastener, identification plate, installation instructions included in the instruction manual

Systems can be customized for your application with a range of additional components:

- Brackets for larger ladder rungs
- Brackets to attach to ladder side rails
- Foldable foot rests for long ladders
- Shaft entry device to provide easy access to manholes
- Exit section
- Rotary exit

GlideLoc Vertical Height Access Ladder System Kits

SKU			System Length	Sections of 10 ft (3.0m) rail	Number of Ladder Rung Clamps
Galvanized	Aluminium	Stainless Steel			
GG0020	GA0020	GS0020	20 ft	2	4
GG0030	GA0030	GS0030	30 ft	3	6
GG0040	GA0040	GS0040	40 ft	4	7
GG0050	GA0050	GS0050	50 ft	5	9
GG0060	GA0060	GS0060	60 ft	6	10
GG0070	GA0070	GS0070	70 ft	7	11
GG0080	GA0080	GS0080	80 ft	8	13
GG0090	GA0090	GS0090	90 ft	9	14
GG0100	GA0100	GS0100	100 ft	10	16
GG0110	GA0110	GS0110	110 ft	11	17
GG0120	GA0120	GS0120	120 ft	12	19
GG0140	GA0140	GS0140	140 ft	14	21
GG0160	GA0160	GS0160	160 ft	16	24
GG0180	GA0180	GS0180	180 ft	18	27
GG0200	GA0200	GS0200	200 ft	20	30

For longer system please contact Contact Miller Engineered Services for support. MEServices@PIPGlobal.com



ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER GLIDELOC SYSTEM COMPONENTS

SKU	Material	Description
FPH_14622	Galvanized steel	Vertical guide rail, for applications where the rail needs to be assembled on existing ladders. Includes the rail splice connector. Length of 10 ft-1 m.
FPH_15729	Aluminum	Vertical guide rail, for applications where the rail needs to be assembled on existing ladders. Includes the rail splice connector. Length of 10 ft-1 m.
FPH_16862	Stainless steel	Vertical guide rail, for applications where the rail needs to be assembled on existing ladders. Includes the rail splice connector. Length of 10 ft-1 m.
FPH_11317	Galvanized steel	End section, allows detaching and attaching the fall arrester from the rail.
FPH_16978	Stainless steel	End section, allows detaching and attaching the fall arrester from the rail.
FPH_11382	Galvanized steel	Side mount clamp, enables mounting rail along the side of ladder. Fits side rails up to width 2-3/8, thickness 9/16.
FPH_16867	Stainless steel	Side mount clamp, enables mounting rail along the side of ladder. Fits side rails up to width 2-3/8, thickness 9/16.
FPH_23724	Galvanized steel	Folding foot rest, provides a rest platform that conveniently folds out of the way when not in use.
FPH_26087	Galvanized steel	Rotary end section, allows safe access to lower the top of the guide rail while standing on the upper platform.
FPH_10903	Galvanized steel	Ring clamp for ladders with round rungs for diameters up to 1 in.
FPH_14804	Galvanized steel	Ring clamp for ladders with round rungs for diameters 1 in to 1-1/4 in.
FPH_14805	Galvanized steel	Ring clamp for ladders with round rungs for diameters 1-1/4 in to 1-3/4 in.
FPH_14809	Stainless steel	Ring clamp for ladders with round rungs for diameters up to 1 in.
FPH_14813	Stainless steel	Ring clamp for ladders with round rungs for diameters 1 in to 1-1/4 in.
FPH_14814	Stainless steel	Ring clamp for ladders with round rungs for diameters 1-1/4 in to 1-3/4 in.



FPH_14622 / FPH_15729 / FPH_16862
Vertical Guide Rail




FPH_11317 / FPH_16978
End Section




FPH_11382 / FPH_16867
Side Mount Clamp



FPH_23724
Folding Foot Rest



FPH_26087
Rotary End Section



FPH_10903 / FPH_14804 / FPH_14805
FPH_14809 / FPH_14813 / FPH_14814
Ring Clamp

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

MILLER GLIDELOC SYSTEM COMPONENTS

SKU	Material	Description
FPH_26027	Stainless steel	End stop, for use on vertical rail applications. Allows for entering & setting the system with GlideLoc fall arrester.
FPH_11534	Stainless steel	Rigid end stop, for use with vertical rail, prevents GlideLoc fall arrester from being removed from rail.
FPH_17065	Stainless steel	Shaft entering device, allows safe entry of a shaft such as a manhole. The prong slip into coupling device FPH_16191. For complete system both parts are required.
FPH_16191	Stainless steel	Coupling device used with shaft entering device FPH_17065.
FPH_30162	Galvanized steel	Ring clamp for ladders with rungs made of U or rectangular profiles 3/4 in to 1-1/2 in.
FPH_30163	Galvanized steel	Ring clamp for ladders with rungs made of U or rectangular profiles 1-1/2 in to 2-3/4 in.
FPH_30164	Stainless steel	Ring clamp for ladders with rungs made of U or rectangular profiles 3/4 in to 1-1/2 in.
FPH_30165	Stainless steel	Ring clamp for ladders with rungs made of U or rectangular profiles 1-1/2 in to 2-3/4 in.



FPH_26027
End Stop




FPH_11534
Rigid End Stop




FPH_17065 / FPH_16191
Shaft Entering Device



FPH_30162 / FPH_30163 / FPH_30164 / FPH_30165
Ring Clamp For Rectangular or U-Shape



Side view
Maximum Ladder Slope 15 degrees from Vertical

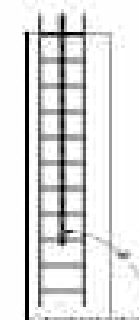

Front view

ANCHORAGE CONNECTORS AND SYSTEM KITS


VERTICAL CLIMBING SYSTEM KITS

FIXED LADDER SAFETY SYSTEM WITH TOP BRACKET AND SELF-RETRACTING LIFELINE

Fixed Ladder Safety System. No Cable Needed.

Combine our nearly indestructible Falcon™ Self-Retracting Lifelines (SRL) with our Ladder Top Bracket Assembly for a cost-competitive solution to ladder safety. Meet OSHA's fixed ladder regulation (1910.23) requiring a personal fall arrest or ladder safety system on fixed ladders over 24 ft. Contact info@services.pfpclobal.com for details.

Typical setup for ladder climbing safety has the ladder exceeding past the platform (A), ladder stopping at the platform (B), or the ladder stopping 1-2 rungs before the platform (C).

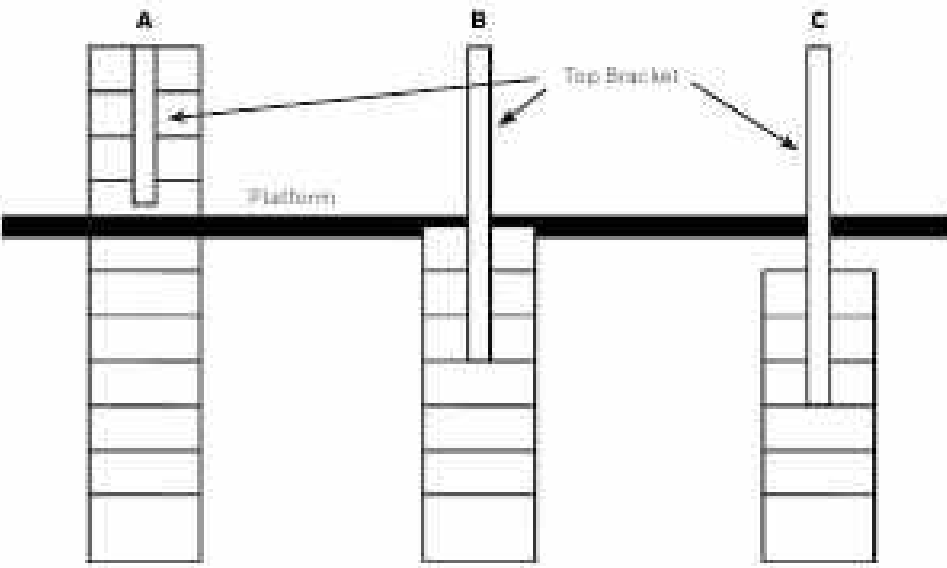


SKU	Description
TRTB-7	7-ft galvanized top bracket assembly with built-in shock absorber
TRTB-10	10-ft galvanized top bracket assembly with built-in shock absorber

Please refer to the Falcon and MightyLite™ (in the Connecting Devices section) to select your preferred length.



Top Bracket Shock Absorber

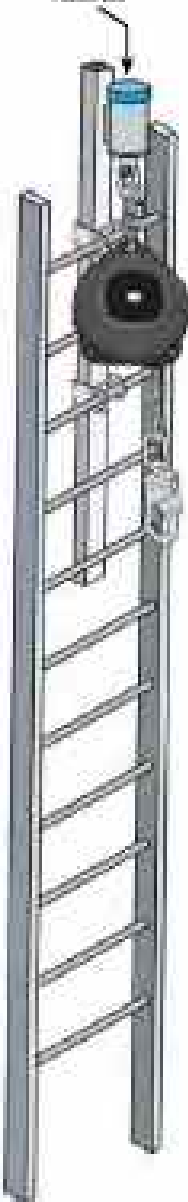

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

SAF-T-CLIMB®

Ladder Climbing System

A basic straight-rail Saf-T-Climb System consists of five components:

SYSTEM COMPONENTS

1 SAF-T-NOTCH RAIL

SKU	Description	Material
526-101-001R	Saf-T-Notch Rail	Galvanized rail
526-102-001	Saf-T-Notch Rail	Aluminum rail
526-105-001	Saf-T-Notch Rail	Type 316L stainless steel rail

Specify length when ordering. If the ladder starts at the ground, subtract two feet from the total rail length (for shuttle installation/removal).

If using a removable dismount, subtract an additional foot from the total rail length.

If using a permanent dismount, subtract three additional feet from the total rail length.

2 RUNG CLAMPS

SKU	Description	Material
024-101-001	Round rungs up to 1-1/8 in diameter	Galvanized
024-102-001	Round rungs up to 1-1/8 in diameter	Aluminum
024-105-001	Round rungs up to 1-1/8 in diameter	Type 316L stainless steel
024-101-002	Square rungs up to 1-1/4 in thickness	Galvanized
024-102-002	Square rungs up to 1-1/4 in thickness	Aluminum
024-105-002	Square rungs up to 1-1/4 in thickness	Type 316L stainless steel


Use one rung clamp at least every 4 ft (Aluminum uses one at least every 6 ft).

Rung clamps must be placed above and below splice on first available rung.

Add one additional rung clamp if using a removable dismount. Add two rung clamps if using a permanent dismount.

3 DISMOUNT EXTENSIONS

SKU	Description	Material
REMOVABLE ASCENDING HATCH DISMOUNT AND HOLDER (Removable Extension Holder sold separately)		
808-101-042R	42-in Removable Extension	Galvanized
808-101-142	Removable Extension Holder	Galvanized
808-102-042	42-in Removable Extension	Aluminum
808-102-142	Removable Extension Holder	Aluminum
808-105-042	42-in Removable Extension	Type 316L stainless steel
808-105-142	Removable Extension Holder	Type 316L stainless steel
REMOVABLE DESCENDING HATCH DISMOUNT		
803-101-054R	54-in Removable Extension	Galvanized
803-102-054	54-in Removable Extension	Aluminum
803-105-054	54-in Removable Extension	Type 316L stainless steel
SAF-T-PIVOT PERMANENT DISMOUNT (Rung clamps required for installation sold separately - two per 6-ft extension)		
527-101-001R	6-ft Permanent Extension	Galvanized
527-102-001	6-ft Permanent Extension	Aluminum
527-105-001	6-ft Permanent Extension	Type 316L stainless steel

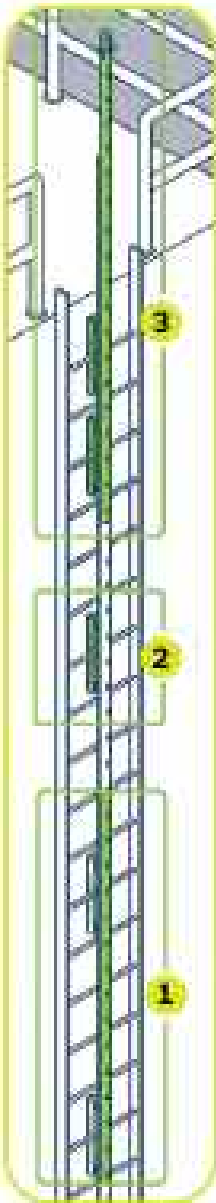

ANCHORAGE CONNECTORS AND SYSTEM KITS

VERTICAL CLIMBING SYSTEM KITS

USER EQUIPMENT

4 SAF-T-GRIP SHUTTLE

SKU	Description
602-100-003-HS	Saf-T-Grip Shuttle, locks into the rail in the event of a fall.

Each pair requires a Saf-T-Grip Shuttle.

5 SAF-T-CLIMB HARNESS

SKU	Description
733-201-001	Universal Harness (L/XL) with medium belt.
733-201-002	Universal Harness (L/XL) with large belt.
733-201-003	Universal Harness (L/XL) with XL belt.
733-201-004	Universal Harness (L/XL) with small belt.


Each harness requires a Saf-T-Climb harness.

Custom Saf-T-Climb Systems

The need for custom Saf-T-Climb designs including curves and platforms, requires more detail. For more information on custom systems, please contact the Miller Engineered Solutions team for assistance with engineered systems: MEEServices@PPDigital.com




DISMOUNT EXTENSION OPTIONS:

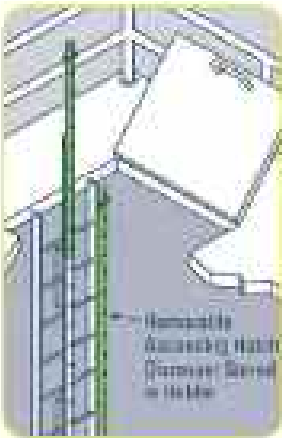


Removable Ascending Hatch Dismount and Holder

This dismount is removable to allow a hatch door to close. The dismount is stored in a holder at the top of the ladder. A worker climbs from the bottom and installs the dismount when he reaches the top. The dismount holder eliminates the need to carry the dismount while climbing.

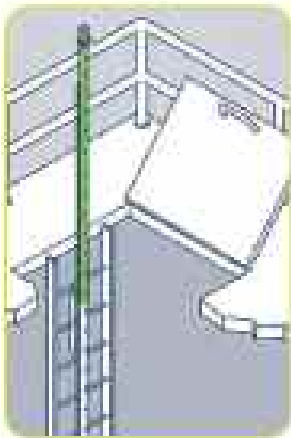

Removable Descending Hatch Dismount

This dismount is removable and installed when a worker needs to climb down. The dismount is removable to allow the hatch door to close.

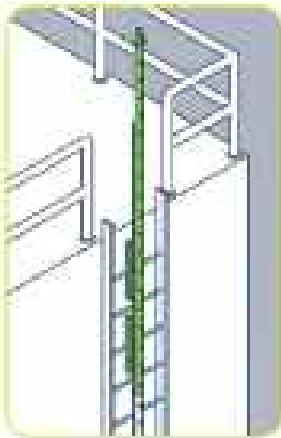

Saf-T-Pivot Permanent Dismount

This dismount is affixed to the ladder and allows the worker to safely dismount at the top of the ladder. Rung clamps required for installation sold separately.

ANCHORAGE CONNECTORS AND SYSTEM KITS

ROOFING

TEMPORARY ROOF ANCHORS

Maximum working load 310 lb. RA25-1/ max working load is 420 lb.

SKU	Description
RA15-1/	15 reusable anchors w/D-ring and screw
RA20-1/	2 reusable anchors w/screws
RA25-1/	Temporary reusable roof anchor designed for roof pitches from 0 - 12/12
RA35-1/	Reusable anchor for flat surfaces, with swivel D-ring



RA25-1/



RA35-1/



RA15-1/



RA20-1/

PERMANENT ROOF ANCHORAGES

Designed for residential and commercial construction on new or existing roofs to provide a quick, safe anchorage point.

MILLER SINGLE D

- The Single D-Permanent Roof Anchor is designed to provide one (1) D-ring anchorage point when securely installed on a wood roof sub-surface or vertical wall.
- Accommodates single user for fall protection.
- Maximum working load 310 lb.

SKU	Description
RAA1/	Stainless steel permanent single D-ring complete with eight (8) 16d nails

MILLER DOUBLE D

- The Double D-Permanent Roof Anchor is designed to provide two (2) D-ring anchorage points when securely installed on a wood roof sub-surface.
- Accommodates single user for fall protection.
- Maximum working load 310 lb.

SKU	Description
RAA0/	Stainless steel permanent double D-ring complete with eight (8) 16d nails
RAA0/SOBULK	Bulk pack of 50

MILLER CLAW

- The Claw Permanent Roof Anchor is designed to provide a single anchorage point when securely installed on a wood rafter or truss member. The Claw anchor fits wood sizes: 2-in x 4-in, 2-in x 6-in, 2-in x 8-in, 2-in x 10-in or 2-in x 12-in.
- Accommodates single user for fall protection.
- Maximum working load 310 lb.

SKU	Description
RAA5/	Stainless steel permanent roof anchor, complete with UV-resistant Santogrip® flashing, protective cap, and twelve (12) 1-1/2 in nails



RAA1/



RAA0/



RAA5/



Body Wear

B	Harnesses	
	Guide to Harness Features	41
	General Application	
	H700 Series	42
	Revolution® Series	44
	AirCore™	46
	H500 Series	56
	DuraFlex Python®	58
	Titan™ II	60
	H100 Series	61
	Welding and Arc Flash	
	Revolution® Series	62
	H500 Series Arc Flash	63
	Revolution™ Kevlar®/Nomex®	64
	Heavy-Duty Welding	64
	H500 Series Welding	65
	Arc-Rated	62
	Specialty	
	Mt. Miller	66
	Miller Safe-T-Climb	66
	Harness Accessories	
	Relief Strap	67
	Web Extensions	68
	Equipment/Accessory Bags	68
	Body Belts	69


BODY WEAR

HARNESS FEATURES

STANDARD FEATURES

Category	Models	Feature/Description	
Entry Level	H100	Lightweight and comfortable	 
	Titan®	Five points of adjustment for a custom fit Covered identification labels New distinctive vibrant color webbing Cost-effective	
Mid Level	H500	New patented pressure-relief breathable shoulder/back padding design minimizes overhead muscular fatigue	
	Python®	DuraFlex™ cushioned tubular webbing to minimize discomfort around the neck and shoulders	
Premium Level	AirCore™	Open-core padding technology for softness, breathability, and moisture control	
	Revolution®	Premium DuraFlex™ webbing, ErgoArmor® back shield, PivotLink® for ease of movement	
	H700	Premium high-tech, multi-layered padding for extra head shock absorption, breathability, and venting	 

ADJUSTMENT BUCKLE TYPES



Quick-connect Buckle

Quick-connect buckles for chest and leg straps interlock similar to a seat belt for easy donning and feature a dual-tab release mechanism to prevent accidental opening.



Tongue Buckle

The tongue buckle works similar to a belt buckle. Insert the loose strap of webbing through the buckle, placing the tongue through the appropriate grommet hole. Push remaining webbing through the keeper.



Mating Buckle

To connect the mating buckle, push the center bar buckle completely through the square link and allow it to fall into place. Pull web and to tighten.



Friction Buckle

To adjust the friction buckle, simply pass the webbing over the knurled bar and back down between the knurled bar and frame. Pull web and to tighten.



Cam Buckle

Easy, one-hand adjustment/release allows simultaneous adjustment of shoulder straps.

D-RING OPTIONS



Front D-ring

Used for a variety of climbing, confined space, and rescue applications.



Side D-rings

Most commonly used for work positioning.



Shoulder D-rings

Primarily used for lifting and lowering individuals, such as in confined space and rescue applications.

BODY WEAR

GENERAL APPLICATION HARNESS

H700 SERIES HARNESSES

FEATURES AND BENEFITS

1.

One-pull trauma relief step provides a state-of-the-art solution for suspension trauma relief.

We've radically simplified what is usually a complicated four-step process. By integrating a patented release mechanism for quick deployment of our two high-performance One-Pull Trauma Relief Steps (one for each foot), the suspended person conveniently stands up in the H700 harness. The pressure being applied to the arteries and veins around the top of the legs is quickly relieved, avoiding the risk of serious injury or death. See user instructions.
2.

Configurable leg strap design for customizable comfort.

Our new Pivot Strap Adjuster offers worker mobility and comfort, allowing workers to adjust the shape of their leg straps, depending on the action that needs to be performed (crouching, bending, crawling, etc.).
3.

Modular lightweight accessory straps for adjustability and convenience.

Low-profile, configurable accessory organizer. These straps allow workers to conveniently attach and move pouches around the MOLLE strap. They accommodate a large number of accessories. Reinforced stitching also provides safety and security for heavyweight accessories. When not in use, the webbing straps don't get tangled.

Available on Construction, Comfort, models.

4.

Practical integrated SRL connector

The convenient Self-Retracting Lifeline (SRL) integrated connector allows for easy attachment of personal single/twin SRLs and carabiners.
5.

User-friendly lanyard keepers & tool tether anchors

Tool tether anchors and lanyard keepers are also positioned in several convenient locations, including front and waist.
6.

Optimized label protection and identifiable harness size

New protected name plate identification and QR code.
7.

Lighter-than-ever

This lightweight full body harness offers workers at height less heft, more comfort, and easier mobility. It reduces muscular fatigue, motion constraints and sweat, all common hazards when using a poorly designed harness.
8.

High tech 3D padding

Innovative, multi-layered padding has been designed for enhanced breathability and venting, keeping workers drier and cooler by combining airflow channel breathability, moisture dispersion technology, and 3D knitted fabric.

Our shoulder back padding has also been designed to protect workers from the robust twin personal SRLs. Workers can also remove the shoulder back padding if needed for cleaning purposes.
9.

Rated to 420 lbs (max. weight capacity)



BODY WEAR

GENERAL APPLICATION HARNESS

H700 SERIES HARNESS WITH ALUMINUM HARDWARE

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-rings	Chest Buckle	Leg Buckles	Belt
H7CC1A0	XS							
H7CC1A1	S/M							
H7CC1A2	Universal	✓	✓	✓		Quick-connect	Tongue	✓
H7CC1A3	XXL							
H7CC1A4	3/4XL							
H7CC2A0	XS							
H7CC2A1	S/M							
H7CC2A2	Universal	✓				Quick-connect	Tongue	✓
H7CC2A3	XXL							
H7CC2A4	3/4XL							
H7CC3A0	XS							
H7CC3A1	S/M							
H7CC3A2	Universal	✓	✓	✓		Quick-connect	Quick-connect	✓
H7CC3A3	XXL							
H7CC3A4	3/4XL							
H7CC3AS0	XS							
H7CC3AS1	S/M							
H7CC3AS2	Universal	✓	✓	✓	✓	Quick-connect	Quick-connect	✓
H7CC3AS3	XXL							
H7CC3AS4	3/4XL							
H7IC1A0	XS							
H7IC1A1	S/M							
H7IC1A2	Universal	✓				Quick-connect	Quick-connect	
H7IC1A3	XXL							
H7IC1A4	3/4XL							
H7IC2A0	XS							
H7IC2A1	S/M							
H7IC2A2	Universal	✓		✓		Quick-connect	Quick-connect	
H7IC2A3	XXL							
H7IC2A4	3/4XL							
H7IC3A0	XS							
H7IC3A1	S/M							
H7IC3A2	Universal	✓	✓	✓		Quick-connect	Quick-connect	
H7IC3A3	XXL							
H7IC3A4	3/4XL							
H7IC2AS0	XS							
H7IC2AS1	S/M							
H7IC2AS2	Universal	✓		✓	✓	Quick-connect	Quick-connect	
H7IC2AS3	XXL							
H7IC2AS4	3/4XL							

The new Miller H700 Series meets OSHA 1926.502, ANSI Z359.11, and CSA Z259.10 standards. Rated up to 420 lb (max. weight capacity).

BODY WEAR

GENERAL APPLICATION HARNESS

REVOLUTION SERIES HARNESSES


Miller Revolution Harnesses reinvent harness safety and functionality with features developed to meet key, user-identified needs: comfort, fit, ease-of-use, style, durability, compliance, flexibility, and convenience.

- Engineered with seven unique components and more than 11 key product features
- Unique rotary design of the PivotLink Connection provides greater comfort in bending and improved mobility
- Integrated Accessory System provides connection points for belts, tools, and accessories




1. DualTech Webbing

Donning is made easy with two-sided, contrasting color webbing and textures.



2. Self-Contained Label Pack

Integrated pack encapsulates labels, minimizing damage and loss.



3. Quick-Connect Chest Buckle

Interlock design similar to a seat belt, for easy donning and features a dual-tab release mechanism to prevent accidental opening.



4. ErgoArmor Back Shield

Semi-flexible back shield minimizes impact from sharp/heavy snap hooks and self-retracting lifelines, stand-up back D-ring simplifies connection.




5. Web Finales

Clip-on design safely organizes webbing after proper adjustment.



6. Cam Buckles

Easy, one-hand adjustment/release allows simultaneous adjustment of shoulder straps.



7. PivotLink Connection

Unique rotary design provides greater comfort in bending/mobility.



BODY WEAR

GENERAL APPLICATION HARNESS



REVOLUTION HARNESS WITH STEEL HARDWARE

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder	Chest Strap Buckle	Leg Strap Buckles	Removable Belt
RDT-QC/XS BK	XS							
RDT-QC/S/MBK	S/M	✓				Quick-connect	Quick-connect	
RDT-QC/UBK	Universal	✓						
RDT-QC/XXL/XXXL BK	2XL/3XL							
RDT-TB/S/MBK	S/M							
RDT-TB/UBK	Universal	✓				Quick-connect	Tongue	
RDT-TB/XXL/XXXL BK	2XL/3XL							
RDT-QC-B/S/MBK	S/M							
RDT-QC-B/UBK	Universal	✓				Quick-connect	Quick-connect	✓
RDT-QC-B/3XL BK	2XL/3XL							
RDT-TB-CP/UBK	Universal	✓	✓			Quick-connect	Tongue	
RDT-TB-CP/3XL BK	2XL/3XL							
RDT-QC-BDP/S/MBK	S/M							
RDT-QC-BDP/UBK	Universal	✓	✓			Quick-connect	Quick-connect	✓
RDT-QC-BDP/3XL BK	2XL/3XL							
RDT-TB-BDP/S/MBK	S/M							
RDT-TB-BDP/UBK	Universal	✓	✓			Quick-connect	Tongue	✓
RDT-TB-BDP/3XL BK	2XL/3XL							
RDTSD-QC/S/MBK	S/M	✓						
RDTSD-QC/UBK	Universal	✓			D-ring	Quick-connect	Quick-connect	
RDTSL-QC/S/MBK	S/M	✓						
RDTSL-QC/UBK	Universal	✓			Loops	Quick-connect	Quick-connect	
RDTFD-QC/S/MBK	S/M							
RDTFD-QC/UBK	Universal	✓		✓		Quick-connect	Quick-connect	
RDTFD-QC/3XL BK	2XL/3XL							
RDTFD-TB/UBK	Universal	✓		✓		Quick-connect	Tongue	
RDTFD-QC-BDP/S/MBK	S/M							
RDTFD-QC-BDP/UBK	Universal	✓	✓	✓		Quick-connect	Quick-connect	✓
RDTFD-QC-BDP/3XL BK	2XL/3XL							
RDTFD-TB-BDP/UBK	Universal	✓	✓	✓		Quick-connect	Tongue	✓
RDTFD-TB-BDP/3XL BK	2XL/3XL							
RDTFDSL-QC-BDP/S/MBK	S/M							
RDTFDSL-QC-BDP/UBK	Universal	✓	✓	✓	Loops	Quick-connect	Quick-connect	✓

These harnesses meet OSHA and certified ANSI Z359.11.

Some SKUs are certified CSA Z359.11. Please refer to the latest Canadian catalog or contact Customer Care.

Rated up to 420 lb (max. weight capacity).

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESSES

FEATURES AND BENEFITS

1. **Breathable, Open-Core Padding Technology**
2. **Custom Designed for the Shoulders / Lumbar/ Legs (patent pending)**
Optimal airflow / circulation
 - Engineered to increase airflow through and around padding
Strategically placed padding
 - Reduces heat and moisture entrapment, keeping a worker drier and cooler
 - Contoured design minimizes contact around the neck, lower back and inner thighs, reducing chafing and irritation
3. **Lightweight**
 - Materials and components selected to reduce fatigue for all-day endurance and increased productivity (available in steel or aluminum hardware)
4. **Stand-Up Back D-Ring**
 - Easily adjusts; simplifies attachment; back pad with built-in fall indicator
5. **Patented DuraFlex Stretchable Webbing**
 - Stretches with every movement; greater mobility and increased comfort

6. **Integral Label Pack**
 - Miller RFID-enabled technology for inventory management, easy tracking, inspection, and monitoring
7. **Front D-Ring**
 - Designed for use in climbing, confined space and rescue applications; available on select models
8. **Cam Buckle**
 - Easy, one-hand adjustment/ release allows simultaneous adjustment of shoulder straps
9. **Mesh Back Shield**
 - Durable, knitted mesh membrane minimizes moisture absorption and maintains optimal air circulation
10. **Quick-connect Chest Buckle**
 - Easy donning; dual tab release mechanism
11. **Removable Belt**
 - Uniquely designed to stay in position when disconnected; even when tools are attached; available on select models
12. **Web Final**
 - Clip-on design safely organizes webbing after proper adjustment



AC-QC-BDP/UGN

Optimal Air Circulation

Maximum Heat Ventilation



BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESS WITH STEEL HARDWARE AND GREEN WEBBING

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt
AC-QC/XSSN	Xsmall							
AC-QC/S/MGN	S/M							
AC-QC/UGN	Universal	✓				Quick-connect	Quick-connect	
AC-QC2/3XLGN	2XL/3XL							
AC-QC/4XLGN	4XL							
AC-QC-B/S/MGN	S/M							
AC-QC-B/UGN	Universal	✓	✓			Quick-connect	Quick-connect	
AC-QC-B2/3XLGN	2XL/3XL							
AC-QC-BDP/S/MGN	S/M							
AC-QC-BDP/UGN	Universal	✓	✓			Quick-connect	Quick-connect	
AC-QC-BDP2/3XLGN	2XL/3XL							
AC-QC-BDP/4XLGN	4XL							
AC-TB/XSSN	Xsmall							
AC-TB/S/MGN	S/M							
AC-TB/UGN	Universal	✓				Quick-connect	Tongue	
AC-TB2/3XLGN	2XL/3XL							
AC-TB/4XLGN	4XL							
AC-TB-B/S/MGN	S/M							
AC-TB-B/UGN	Universal	✓	✓			Quick-connect	Tongue	
AC-TB-B2/3XLGN	2XL/3XL							
AC-TB-BDP/S/MGN	S/M							
AC-TB-BDP/UGN	Universal	✓	✓			Quick-connect	Tongue	
AC-TB-BDP2/3XLGN	2XL/3XL							
AC-TB-BDP/4XLGN	4XL							

These harnesses meet OSHA and certified ANSI Z359.1-1.
Some SKUs are certified CSA 2209.1.0 please refer to the latest Canadian catalog or contact Customer Care (rated up to 420 lb / max weight capacity).



AC-TB/UGN



AC-QC/UGN



AC-QC-BDP/UGN

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESS WITH STEEL HARDWARE AND GREEN WEBBING (Continued)

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt
ACSD-QCSMG	S/M	✓			✓	Quick-connect	Quick-connect	
ACSD-QCUG	Universal	✓			✓	Quick-connect	Quick-connect	
ACSD-QC23XG	2XL/3XL							
ACF-QCSMG	S/M							
ACF-QCUG	Universal	✓		✓		Quick-connect	Quick-connect	
ACF-QC23XG	2XL/3XL							
ACF-QCDSMG	S/M							
ACF-QCUG	Universal	✓	✓	✓		Quick-connect	Quick-connect	
ACF-QC23XG	2XL/3XL							
ACF-QCBPDSMG	S/M							
ACF-QCBDPUG	Universal	✓	✓	✓		Quick-connect	Quick-connect	✓
ACF-QCBDP23XG	2XL/3XL							
ACFSD-QCUG	Universal	✓		✓	✓	Quick-connect	Quick-connect	
ACF-TBSMG	S/M							
ACF-TBUG	Universal	✓		✓		Quick-connect	Tongue	
ACF-TB23XG	2XL/3XL							
ACF-TBDXSG	Small							
ACF-TBDSMG	S/M	✓	✓	✓		Quick-connect	Tongue	
ACF-TBDUG	Universal							
ACF-TBD23XG	2XL/3XL							
ACF-TBBDPSMG	S/M							
ACF-TBBDPUG	Universal	✓	✓	✓		Quick-connect	Tongue	✓
ACF-TBBDP23XG	2XL/3XL							

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA Z259.10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity).



ACF-TBBUG



ACF-QCUG

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESS WITH STEEL HARDWARE AND BLUE WEBBING

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt
AC-QC/S/MBL	S/M							
AC-QC/UBL	Universal	✓				Quick-connect	Quick-connect	
AC-QC2/3XLBL	2XL/3XL							
AC-QC-D/S/MBL	S/M	✓	✓			Quick-connect	Quick-connect	
AC-QC-D/UBL	Universal							
AC-QC-BDP/S/MBL	S/M							
AC-QC-BDP/UBL	Universal	✓	✓			Quick-connect	Quick-connect	✓
AC-QC-BDP2/3XLBL	2XL/3XL							
AC-TB/S/MBL	S/M							
AC-TB/UBL	Universal	✓				Quick-connect	Tongue	
AC-TB2/3XLBL	2XL/3XL							
AC-TB-D/S/MBL	S/M	✓	✓			Quick-connect	Tongue	
AC-TB-D/UBL	Universal							
AC-TB-BDP/S/MBL	S/M							
AC-TB-BDP/UBL	Universal	✓	✓			Quick-connect	Tongue	✓
ACF-QCUB	Universal	✓		✓		Quick-connect	Quick-connect	
ACF-QC23XB	2XL/3XL							
ACF-QCDXSB	Small							
ACF-QCDSMB	S/M	✓	✓	✓		Quick-connect	Quick-connect	
ACF-QCUB	Universal		✓	✓				
ACF-QC23XB	2XL/3XL							
ACF-QCBDPXSB	Small							
ACF-QCBDPXSB	S/M							
ACF-QCBDPUB	Universal	✓	✓	✓		Quick-connect	Quick-connect	✓
ACF-QCBDP23XB	2XL/3XL							
ACF-QCBDP4XB	4XL							
ACF-TBUB	Universal	✓	✓	✓		Quick-connect	Tongue	
ACF-TB23XB	2XL/3XL							
ACF-TBBDPUB	Universal	✓	✓	✓		Quick-connect	Tongue	✓
ACF-TBBDP23XB	2XL/3XL							

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA Z259.10 please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity).



AC-QC-BDP-UBL



AC-QC2_3XLBL

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESS WITH ALUMINUM HARDWARE AND GREEN WEBBING

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt
ACA-QC/XSGN	Small	✓				Quick-connect	Quick-connect	
ACA-QC/S/MGN	S/M							
ACA-QC/UGN	Universal							
ACA-QC2/3XLGN	2XL/3XL							
ACA-QC-D/UGN	Universal	✓	✓			Quick-connect	Quick-connect	
ACA-QC-D2/3XLGN	2XL/3XL							
ACA-QC-BDP/S/MGN	S/M	✓	✓			Quick-connect	Quick-connect	✓
ACA-QC-BDP/UGN	Universal							
ACA-QC-BDP2/3XLGN	2XL/3XL							
ACA-TB/S/MGN	S/M	✓				Quick-connect	Tongue	
ACA-TB/UGN	Universal							
ACA-TB2/3XLGN	2XL/3XL							
ACA-TB-D/UGN	Universal	✓	✓			Quick-connect	Tongue	
ACA-TB-D2/3XLGN	2XL/3XL							
ACA-TB-BDP/S/MGN	S/M	✓	✓			Quick-connect	Tongue	✓
ACA-TB-BDP/UGN	Universal							
ACA-TB-BDP2/3XLGN	2XL/3XL							
AAF-QCXSG	Small	✓				Quick-connect	Quick-connect	
AAF-QCSMG	S/M			✓				
AAF-QCUG	Universal							
AAF-QC21XG	2XL/3XL							
AAF-QCDSMG	S/M	✓	✓	✓		Quick-connect	Quick-connect	
AAF-QCDUG	Universal							
AAF-QCD23XG	2XL/3XL							
AAF-QCBPDSMG	S/M	✓	✓	✓		Quick-connect	Quick-connect	✓
AAF-QCBDPUG	Universal							
AAF-QCBDP23XG	2XL/3XL							
AAF-TBSMG	S/M	✓				Quick-connect	Tongue	
AAF-TBUG	Universal			✓				
AAF-TB23XG	2XL/3XL							
AAF-TBDUG	Universal	✓	✓	✓		Quick-connect	Tongue	
AAF-TBD23XG	2XL/3XL							
AAF-TBBDPSMG	S/M	✓	✓	✓		Quick-connect	Tongue	✓
AAF-TBBDPUG	Universal							
AAF-TBBDP23XG	2XL/3XL							

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA 2259.10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity)

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESS WITH ALUMINUM HARDWARE AND BLUE WEBBING

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt
ACA-QC/XSBL	Small	✓				Quick-connect	Quick-connect	
ACA-QC/S/MBL	S/M							
ACA-QC/UBL	Universal							
ACA-QC2/3XLBL	2XL/3XL							
ACA-QC-D/S/MBL	S/M	✓	✓			Quick-connect	Quick-connect	
ACA-QC-D/UBL	Universal							
ACA-QC-D2/3XLBL	2XL/3XL	✓	✓			Quick-connect	Quick-connect	✓
ACA-QC-BDP/S/MBL	S/M							
ACA-QC-BDP/UBL	Universal							
ACA-QC-BDP2/3XLBL	2XL/3XL	✓				Quick-connect	Tongue	
ACA-TB/S/MBL	S/M							
ACA-TB/UBL	Universal							
ACA-TB2/3XLBL	2XL/3XL	✓	✓			Quick-connect	Tongue	✓
ACA-TB-BDP/S/MBL	S/M							
ACA-TB-BDP/UBL	Universal							
ACA-TB-BDP2/3XLBL	2XL/3XL	✓	✓			Quick-connect	Tongue	
ACA-TB-D/UBL	Universal							
AAF-QCUB	Universal	✓	✓	✓		Quick-connect	Quick-connect	
AAF-QCDSMB	S/M	✓	✓	✓		Quick-connect	Quick-connect	
AAF-QCDUB	Universal							
AAF-QCD23XB	2XL/3XL							
AAF-QCBPDSMB	S/M	✓	✓	✓		Quick-connect	Quick-connect	✓
AAF-QCBDPUB	Universal							
AAF-QCBDP23XB	2XL/3XL							
AAF-TBSMB	S/M	✓				Quick-connect	Tongue	
AAF-TBUB	Universal			✓				
AAF-TB23XB	2XL/3XL							
AAF-TBDUB	Universal	✓	✓	✓		Quick-connect	Tongue	
AAF-TBD23XB	2XL/3XL							
AAF-TBBDPSMB	S/M	✓	✓	✓		Quick-connect	Tongue	✓
AAF-TBBDPUB	Universal							
AAF-TBBD23XB	2XL/3XL							

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA 2259.10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity)



AAF-QCUB



ACA-QC-BDPUBL

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESSES FOR OIL AND GAS

- Multiple back D-ring connections – 18-in extended-back D-ring provides an easy-to-reach attachment point for fall arrest, freeing the back D-ring as an additional connection point for fall arrest or rescue
- Enhanced lumbar padding – Expanded front waist padding for increased comfort and support
- Up to 20% lighter than similar competitive harnesses – Increased productivity and reduced fatigue
- Removable belt with leather guide – Improved design provides increased functionality, comfort, and durability
- Lower lumbar D-ring – Provides restraint attachment point when needed
- Box'n chair attachment – Rigid work seat for added support
- Seat sling attachment – Flexible seat for use with a demick climb-assist system, reducing worker fatigue



ACOG-TB8UG

SKU	Size	Webbing Color	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/Removable Belt	Options
WITH STEEL HARDWARE									
ACOG-TB8MG	S/M								
ACOG-TB8UG	Universal	Green	✓		✓	Mating	Tongue	✓	
ACOG-TB23XB	2XL/3XL								
ACOG-TB8CSMB	S/M	Blue	✓		✓	Mating	Tongue	✓	Removable Box'n Chair with Side D-rings
ACOG-TB8CUB	Universal								
ACOG-TB8SSMB	S/M								
ACOG-TB8SUB	Universal	Blue	✓		✓	Mating	Tongue	✓	Removable Seat Sling with Side D-rings
ACOG-TB8S23XB	2XL/3XL								
ACOG-TB8SSMG	S/M	Green	✓		✓	Mating	Tongue	✓	Removable Seat Sling with Side D-rings
ACOG-TB8SUG	Universal								
ACOG-TB8S23XG	2XL/3XL								
ACCESSORIES									
ACOG-B5	Seat Sling with Side D-rings								
ACOG-B0	Box'n Chair with Side D-rings								

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA Z259.10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity)



ACOG-B5



ACOG-B0

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE HARNESSES FOR WIND ENERGY

- Up to 24% lighter than similar competitive harnesses – Increased productivity and reduced fatigue
- Up to 16% less surface area than other padding used on the market – Keeps workers cooler and working longer
- Patented, durable removable lumbar wear pad – Lightweight, non-marring material designed to protect the harness and the wall of the turbine from damage
- Removable belt with tool loops – Uniquely designed to stay in position when disconnected, even when tools are attached



ACPW-QC8DP5G



ACPW-QC8DP5G-Back

SKU	Size	Webbing Color	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/Removable Belt	Extended Back D-ring
WITH STEEL HARDWARE									
ACPW-QC8DP5MG	S/M								
ACPW-QC8DPUS	Universal	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACPW-QC8DP23XG	2XL/3XL								
ACPW-QC8DP5MB	S/M	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACPW-QC8DPUB	Universal								
ACPW-QC8DP23XB	2XL/3XL								
WITH ALUMINUM HARDWARE									
AAFW-QC8DP5MG	S/M	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAFW-QC8DPUS	Universal								

These harnesses meet OSHA and certified ANSI Z359.11.
Some SKUs are certified CSA Z259.10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 420 lb (max. weight capacity)

BODY WEAR

GENERAL APPLICATION HARNESS

AIRCORE TOWER CLIMBING HARNESS

- Up to 21% lighter than similar competitive harnesses – Increased productivity and reduced fatigue
- Up to 16% less surface area than other padding used on the market – Keeps workers cooler and working longer
- Leather Bos'n chair attachment – Removable/adjustable leather rig work seat for added support
- Removable belt with tool loops – Uniquely designed to stay in position when disconnected, even when tools are attached



ACT-QC23XG

SKU	Size	Webbing Color	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt	Options
WITH STEEL HARDWARE									
ACT-QCSMG	S/M	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACT-QCUG	Universal	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACT-QCSMB	S/M	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACT-QCUB	Universal	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACT-QC23XB	2XL/3XL	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
ACT-QCBCSMG	S/M	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
ACT-QCBCUG	Universal	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
WITH ALUMINUM HARDWARE									
AAT-QCSMG	S/M	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAT-QCUG	Universal	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAT-QC23XG	2XL/3XL	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAT-QCUB	Universal	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAT-QC23XB	2XL/3XL	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	
AAT-QCBCSMG	S/M	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
AAT-QCBCUG	Universal	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
AAT-QCBC23XG	2XL/3XL	Green	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
AAT-QCBCSMB	S/M	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
AAT-QCBCUB	Universal	Blue	✓	✓	✓	Quick-connect	Quick-connect	✓	Removable Bos'n Chair with Side D-rings
ACCESSORIES									
AAT-BC	Bos'n Chair with Steel Side D-rings								

AIRCORE MINING HARNESS

- Up to 21% lighter than similar competitive harnesses – Increased productivity and reduced fatigue
- Enhanced lumbar padding – Expanded front waist padding for increased comfort and support
- Removable belt with leather guide – Improved design provides increased functionality, comfort, and durability



AAM-TBBPUG

SKU	Size	Webbing Color	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Lumbar Pad/ Removable Belt	Extended Back D-ring
AAM-TBBPUG*	Universal	Green	Aluminum	-	Aluminum	Tongue	Tongue	✓	-
AAM-TBBP23XB*	2XL/3XL	Blue	Aluminum	-	Aluminum	Tongue	Tongue	✓	-

These harnesses meet OSHA and certified ANSI Z359.11. Some SKUs are certified CSA Z259.10. Please refer to the latest Canadian catalog or contact Customer Care. Rated up to 420 lb (max weight capacity).



BODY WEAR

GENERAL APPLICATION HARNESS

H500 SERIES HARNESSES

Miller recognized the need for change and revolutionized a new generation of safety harnesses, the Miller H500 series, around four key worker-centric value drivers: ergonomic safety, usability, style and performance.

The new Miller H500 integrates evidence-based “best-in-class” anatomically and ergonomically designed pressure-relief breathable padding for more comfort and freedom of movement, and introduces a variety of other new smart and intuitive safety features.

The Miller H500 aims beyond compliance to keep workers safe and supported – making their jobs easier and keeping them more safe.

FEATURES AND BENEFITS

1. Greater freedom of movement

 - New specially formulated webbing flexes to accommodate movement and body contours for optimum comfort around legs/shoulders
 - New patented shoulder/back padding design minimizes overhead muscular fatigue (overexertion)
 - Waist pad with adequate foam density for optimum lumbar support
 - Lighter-than-ever harnesses
2. More breathability

 - New “best-in-class” anatomically and ergonomically designed pressure-relief breathable shoulder/back padding keeps workers drier and cooler
 - Three times more breathable compared to the next best alternative (last water vapor resistance – RET)*
3. Smart anti-tangle for a hassle-free donning experience
4. Dedicated SRL web link for easy attachment of personal SRLs
5. User-friendly resettable lanyard keepers
 - Allows users to attach lanyard when not in use
6. Clearly identifiable smart impact indicators for hassle-free inspection
7. Optimized label protection with self-contained and practical Velcro®-label pouch
8. Improved visible stitch pattern for easy inspection
9. Rated to 420 lb (max. weight capacity)



BODY WEAR

GENERAL APPLICATION HARNESS

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-rings	Chest Buckles	Leg Buckles	Comfort Padding	Belt
H500 SERIES HARNESS WITH STEEL D-RINGS									
H50C311021	S/M								
H50C311022	Universal	✓	✓			Mating	Tongue	✓	✓
H50C311023	XXL								
H50C311121	S/M			✓					
H50C311122	Universal	✓	✓	✓		Mating	Tongue	✓	✓
H50C311123	XXL								
H50C221121	S/M								
H50C221122	Universal	✓		✓		Quick-connect	Quick-connect	✓	✓
H50C221123	XXL								
H50C311001	S/M								
H50C311002	Universal	✓				Mating	Tongue	✓	✓
H50C311003	XXL								
H50S311020	Xsmall								
H50S311021	S/M								
H50S311022	Universal	✓	✓			Mating	Tongue		✓
H50S311023	XXL								
H50S3110281	S/M								
H50S3110282	Universal	✓	✓		✓	Mating	Tongue		✓
H50S3110283	XXL								
H50S311120	Xsmall								
H50S311121	S/M	✓	✓	✓		Mating	Tongue		✓
H50S311122	Universal								
H50S311123	XXL								
H50S221021	S/M								
H50S221022	Universal	✓	✓			Quick-connect	Quick-connect		✓
H50S221023	XXL								
H50C311000	Xsmall								
H50C311001	S/M	✓				Mating	Tongue	✓	
H50C311002	Universal								
H50C311003	XXL								
H50C221001	S/M								
H50C221002	Universal	✓				Quick-connect	Quick-connect	✓	
H50C221003	XXL								
H50C221021	S/M								
H50C221022	Universal	✓	✓			Quick-connect	Quick-connect	✓	
H50C221023	XXL								
H50C311120	Xsmall								
H50C311121	S/M	✓	✓	✓		Mating	Tongue	✓	
H50C311122	Universal								
H50C311123	XXL								
H50C221101	S/M								
H50C221102	Universal	✓		✓		Quick-connect	Quick-connect	✓	
H50C221103	XXL								
H50SP311001	S/M								
H50SP311002	Universal	✓				Mating	Tongue		
H50SP311003	XXL								
H50SP311021	S/M								
H50SP311022	Universal	✓	✓			Mating	Tongue		
H50SP311023	XXL								

The H500 Series meets OSHA and certified ANSI Z359.1-1 and CSA Z259.15 standards. Rated up to 420 lb (max. weight capacity).

BODY WEAR

GENERAL APPLICATION HARNESS

SKU	Size	Back D-ring	Side D-rings	Front D-ring	Shoulder D-rings	Chest Buckles	Leg Buckles	Comfort Padding	Belt
H500 SERIES HARNESS WITH STEEL D-RINGS									
H5IS311101	S/M			✓		Mating	Tongue		
H5IS311102	Universal	✓		✓		Mating	Tongue		
H5IS311103	XXL								
H5IS3111051	S/M								
H5IS3111052	Universal	✓		✓	✓	Mating	Tongue		
H5IS3111053	XXL								
H5IS311121	S/M								
H5IS311122	Universal	✓	✓	✓		Mating	Tongue		
H5IS311123	XXL								
H5ISP221001	S/M								
H5ISP221002	Universal	✓				Quick-connect	Quick-connect		
H5ISP221003	XXL								
H5ISP111001	S/M								
H5ISP111002	Universal	✓				Mating	Mating		
H5ISP111003	XXL								
H5ISP111021	S/M								
H5ISP111022	Universal	✓	✓			Mating	Mating		
H5ISP111023	XXL								
H5ISP321001	S/M								
H5ISP321002	Universal	✓				Quick-connect	Tongue		
H5ISP321003	XXL								
H5ISP221021	S/M								
H5ISP221022	Universal	✓	✓			Quick-connect	Quick-connect		
H5ISP221023	XXL								
H5IS321101	S/M			✓					
H5IS321102	Universal	✓		✓		Quick-connect	Tongue		
H5IS321103	XXL								
H5IS321111	S/M								
H5IS321112	Universal	✓	✓	✓		Quick-connect	Tongue		
H5IS321113	XXL								
H500 SERIES HARNESS WITH ALUMINUM D-RINGS									
H5CC312221	S/M								
H5CC312222	Universal	✓	✓	✓		Mating	Tongue	✓	✓
H5CC312223	XXL								
H5CC222221	S/M								
H5CC222222	Universal	✓	✓	✓		Quick-connect	Quick-connect	✓	✓
H5CC222223	XXL								
H5CC222021	S/M								
H5CC222022	Universal	✓	✓			Quick-connect	Quick-connect	✓	✓
H5CC222023	XXL								
H5IC222021	S/M								
H5IC222022	Universal	✓	✓			Quick-connect	Quick-connect	✓	
H5IC222023	XXL								

The H500 Series meets OSHA and certified ANSI Z359.11 and CSA Z359-10 standards.
Rated up to 425 lb (max. weight capacity)

BODY WEAR

GENERAL APPLICATION HARNESS

DURAFLEX PYTHON HARNESS

DuraFlex Python Harnesses feature cushioned tubular webbing in the shoulder straps to minimize possible discomfort around the neck and shoulders when required to wear a tool belt. DuraFlex stretchable webbing in the lower torso for greater flexibility, mobility and less fatigue.

- Tubular webbing designed with contoured edge improves comfort, durable, high-density, water-repellent foam
- Fully adjustable harness design, along with the stretchable webbing, ensures proper fit without sacrificing comfort
- Self-contained label pack encapsulates labels minimizing damage and loss. Integrated and oversized pull-free lanyard rings
- Soft and flexible D-ring back pad further enhances comfort



SKU	Size	Webbing Color	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles
WITH STEEL HARDWARE							
P950/S/MGN	S/M	Green					
P950/UGN	Universal		✓			Mating	Mating
P950/XXLGN	XXL						
P950/XXXLGN	XXXL						
P950-A/S/MGN	S/M	Green					
P950-A/UGN	Universal		✓			Mating	Tongue
P950-A/XXLGN	XXL						
P950-SB/S/MGN	S/M	Green					
P950-SB/UGN	Universal		✓	✓		Mating	Tongue
P950-SB/XXLGN	XXL						
P950FD-SB/S/MGN	S/M	Green					
P950FD-SB/UGN	Universal		✓	✓	✓	Mating	Tongue
P950FD-SB/XXLGN	XXL						
P950QC/S/MGN	S/M	Green					
P950QC/UGN	Universal		✓			Quick-connect	Quick-connect
P950QC/XXLGN	XXL						
P950QC/XXXLGN	XXXL						
P9500QC/S/MBL	S/M	Blue					
P9500QC/UBL	Universal		✓			Quick-connect	Quick-connect
P9500QC/XXLBL	XXL						
P950QC-T/S/MGN	S/M	Green					
P950QC-T/UGN	Universal		✓	✓		Quick-connect	Quick-connect
P950QC-T/XXLGN	XXL						
P950QC-T/XXXLGN	XXXL						

These harnesses meet OSHA and certified ANSI Z359.11.

Some SKUs are certified CSA Z359-10. Please refer to the latest Canadian catalog or contact Customer Care.
Rated up to 425 lb (max. weight capacity)

BODY WEAR

GENERAL APPLICATION HARNESS

TITAN II NON-STRETCH HARNESSES

- Increased worksite safety with hi-viz color webbing
- Easier vertical adjustability that stays in place
- Slip resistant back D-ring pad and forward positioned side D-rings, keeping your tool bags in the right place
- Oversized ID tags provide quick and easy harness size identification
- Back strap increases safety by preventing roll out in the event of a fall
- Contractor harness has more comfort and better fit with lighter, strategically-placed padding that provides optimal airflow
- Rated for a 420 lb worker



SKU	Size	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Belt
T4500/XSAK	XS	Steel			Mating	Tongue	
T4500/S/MAK	S/M						
T4500/UAK	Universal						
T4500/XOLAK	XL						
T4500/XXLAK	XXL	Steel		✓	Mating	Tongue	
T4500FD/UAK	Universal						
T4507/S/MAK	S/M						
T4507/UAK	Universal						
T4507/XOLAK	XL	Steel	✓		Mating	Tongue	
T4507/XXLAK	XXL						
T4507FD/UAK	Universal						
Contractor Harness – Includes Integrated Back/Shoulder pads							
T4577/S/MAK	S/M	Steel	✓	✓	Mating	Tongue	✓
T4577/UAK	Universal						
T4577/XOLAK	XL						
T4577/XXLAK	XXL						

The Titan Series meets OSHA and certified ANSI Z359.11 and CSA Z259.10 standards
(Rated up to 420 lb/190 kg max. weight capacity)



T4577



T4507FD

BODY WEAR

GENERAL APPLICATION HARNESS

H100 SERIES HARNESSES

The Miller H100 series has been designed around a simple concept: provide a fundamental fall protection line with exceptional value. The new H100 series was assembled to meet the most common fall protection needs while maintaining a focus on value and safety.

The H100 series is Miller's cost-effective, quality construction, and general industry compliant harness designed to meet the most common fall protection needs.

FEATURES AND BENEFITS

- **Reliable quality:** Built with our legendary quality and reliability
- **Lightweight:** More comfortable
- **Five points of adjustment** for a custom fit
- **Covered identification labels:** Protects labels during the life of the harness
- **New distinctive vibrant color webbing**
- **Cost-effective**

SKU	Size	Back D-ring	Chest Strap Buckles	Leg Buckles
H11110021	S/M	✓	Mating	Mating
H11110022	Universal			
H11110023	XXL/XXXL	✓	Mating	Tongue
H13110021	S/M			
H13110022	Universal			
H13110023	XXL/XXXL			

The H100 Series meets OSHA and certified ANSI Z359.11 and CSA Z259.10 standards
(Rated up to 420 lb/190 kg max. weight capacity)



H111

BODY WEAR

WELDING AND ARC FLASH HARNESS

REVOLUTION ARC-RATED HARNESS

Miller Revolution Arc-Rated Harnesses are designed to protect workers from falls caused by electric arc-flash and arc-blast exposure when working at heights or in confined space applications near energized electrical sources.

- Kevlar®/Nomex® Miller DualTech Webbing
- Patent 44 kN (10,000 lb) tensile strength webbing
- Engineered with permanent fire retardant (FR) properties
- Offers the durability and FR properties of Kevlar on the outer side, with softer FR Nomex on the inside of the webbing for greater comfort, assuring arc protection and durability that eclipses any nylon webbing
- The Kevlar web loop on the back pad allows for a "metal-tee" connection when used with a Kevlar shock-absorbing lanyard with a choke-off loop
- All Miller Revolution Arc-Rated Harnesses have bright red binding on every pad, making them easily identifiable as an arc-rated product



SKU	Size	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Sub-pelvic Strap	Removable Belt
RKNAR-QC/S/MBK	S/M	✓			Quick-connect	Quick-connect	✓	
RKNAR-QC/UBK	Universal							
RKNAR-QC/3XLBK	2XL/3XL							
RKNAR-QC/4XLBK	4XL	✓			Quick-connect	Tongue	✓	
RKNAR-TB/UBK	Universal							
RKNAR-TB/3XLBK	2XL/3XL							
RKNAR-QC-BDP/S/MBK	S/M	✓	✓		Quick-connect	Quick-connect	✓	✓
RKNAR-QC-BDP/UBK	Universal							
RKNAR-QC-BDP/3XLBK	2XL/3XL							
RKNAR-TB-BDP/S/MBK	S/M	✓	✓		Quick-connect	Tongue	✓	✓
RKNAR-TB-BDP/UBK	Universal							
RKNAR-TB-BDP/3XLBK	2XL/3XL							
RKNARFD-QC/S/MBK	S/M	✓		✓	Quick-connect	Quick-connect	✓	
RKNARFD-QC/UBK	Universal							
RKNARFD-QC/3XLBK	2XL/3XL							
RKNARFDQC-BDP/S/MBK	S/M	✓	✓	✓	Quick-connect	Quick-connect	✓	✓
RKNARFD-QC-BDP/UBK	Universal							
RKNARFDQCBDP/3XLBK	2XL/3XL							
RKNARRL-QC/S/MBK	S/M	✓		Rescue Loops	Quick-connect	Quick-connect	✓	
RKNARRL-QC/UBK	Universal							
RKNARRL-QC/3XLBK	2XL/3XL							
RKNARRL-TB/S/MBK	S/M	✓		Rescue Loops	Quick-connect	Tongue	✓	
RKNARRL-TB/UBK	Universal							
RKNARRL-TB/3XLBK	2XL/3XL							
RKNARRL-QCBDP/S/MBK	S/M	✓	✓	Rescue Loops	Quick-connect	Quick-connect	✓	✓
RKNARRL-QC-BDP/UBK	Universal							
RKNARRLQCBDP/3XLBK	2XL/3XL							
RKNARRL-TB-BDP/UBK	Universal	✓	✓	Rescue Loops	Quick-connect	Tongue	✓	✓

These harnesses meet ASTM F887, D308, and certified ANSI Z359.11. Some SKUs are certified CSA Z359.10. Please refer to the latest Canadian catalog or contact Customer Care. Rated up to 420 lb (max. weight capacity). Kevlar & Nomex are registered trademarks of E. I. DuPont.

BODY WEAR

WELDING AND ARC FLASH HARNESS

H500 ARC FLASH HARNESS

FEATURES AND BENEFITS

1. Polyamide webbing ASTM F887 certified arc flash 40 cal/cm²
2. Removable shoulder padding
3. Dielectric back D-ring with dedicated SRL web link for easy attachment of personal SRLs
4. Polyamide front webbing loops
5. The A/2 identification tag serves as a reminder to ensure the secure connection of two webbing loops when utilizing the sternal attachment point
6. User-friendly reusable lanyard keepers. Allows users to attach lanyard when not in use
7. Dielectric shoulder strap adjuster buckle
8. Easy visual sizing
9. Dielectric quick-connect on legs and chest
10. Clearly identifiable smart impact indicators for hassle-free inspection with outside personalization tag
11. Improved visible stitch pattern for easy inspection
12. Clear Arc-Flash application visual icon
13. Optimized label protection with self-contained and practical Velcro-label FR-material pouch
14. Safety polyamide belt with dielectric quick-connect buckle
15. Meets ASTM F887, OSHA 1926.502, certified ANSI Z359.11-2021, and CSA Z359.10-2018 Class ALR & ALPR
16. Maximum worker weight capacity rated OSHA and CSA 420 lb and ANSI 310 lb



SKU	Size	Back D-ring	Side D-rings & Belt	Chest Strap Buckles	Leg Strap Buckles	SRL Web Link (WL)
H5AFC151	S/M	✓	✓	Dielectric Quick-connect	Dielectric Quick-connect	✓
H5AFC152	M/L/XL					
H5AFC153	XL					
H5AFC251	S/M	✓		Dielectric Quick-connect	Dielectric Quick-connect	✓
H5AFC252	M/L/XL					
H5AFC253	XL					

BODY WEAR

WELDING AND ARC FLASH HARNESS

REVOLUTION KEVLAR-NOMEX WEBBING

Rugged, black Kevlar outside and gray Nomex inside provide superior comfort and durability for harsh working environments.

- Engineered with permanent fire retardant (FR) properties
- Offers the durability and FR properties of Kevlar R on the outer side, with softer FR Nomex on the inside of the webbing for greater comfort assures arc protection and durability that eclipses any nylon webbing
- Rated to 400 lb capacity



RKN-QC/UBK

SKU	Size	Back D-ring	Side D-rings and Pad	Front D-ring	Chest Strap Buckle	Leg Strap Buckles	Removable Belt
RKN-QC/S/MBK	S/M						
RKN-QC/UBK	Universal	✓			Quick-connect	Quick-connect	
RKN-QC/XXL/XXLBK	2XL/3XL						
RKN-QC-B/S/MBK	S/M						
RKN-QC-B/UBK	Universal	✓			Quick-connect	Quick-connect	✓
RKN-QC-B/3XLBK	2XL/3XL						
RKN-QC-BDP/S/MBK	S/M						
RKN-QC-BDP/UBK	Universal	✓	✓		Quick-connect	Quick-connect	✓
RKN-QC-BDP/3XLBK	2XL/3XL						
RKN-TB/S/MBK	S/M						
RKN-TB/UBK	Universal	✓			Quick-connect	Tongue	
RKN-TB/XXL/XXLBK	2XL/3XL						
RKNFD-QC/UBK	Universal	✓		✓	Quick-connect	Quick-connect	
RKNFD-QC/3XLBK	2XL/3XL						

These harnesses meet OSHA and certified ANSI Z359.11. Series MBK's are certified CSA Z259.15. Please refer to the latest Canadian catalog or contact Customer Care. Rated up to 400 lb (max. weight capacity).

HEAVY-DUTY WELDING/ARC FLASH HARNESS

- Rugged black Kevlar webbing for harsh welding environments
- Meets ASTM F887 Arc Test requirements and are rated for arc exposure
- Quick-connect buckles on the chest strap for easy/fast donning

SKU	Size	Back D-ring	Chest Strap Buckle	Leg Strap Buckles
H50K/S/MBL	S/M			
H50K/UBL	Universal	Web	Mating	Mating
H50K/XXLBL	2XL			
H50K/XXLBL	3XL			
H50KQC/S/MBK	S/M			
H50KQC/UBK	Universal	Web	Quick-connect	Quick-connect
H50KQC/XXLBK	2XL			



H50KQC/UBK

These harnesses meet OSHA and certified ANSI Z359.11. Series MBK's are certified CSA Z259.15. Please refer to the latest Canadian catalog or contact Customer Care. Rated up to 400 lb (max. weight capacity).

BODY WEAR

WELDING AND ARC FLASH HARNESS

H500 WELDING HARNESS

The H500 welding full body harness were specially developed for work at heights, whether it's welding, soldering, grinding or any other task that generates heat and spark. It's important to protect yourself at heights and your surroundings from the risks of fire, explosions, burns, and fumes. The H500 Welding Series is Miller's cost-effective harness, which features heat-resistant and flame-retardant capabilities.

1. Specially formulated heat-resistant and flame-retardant (FR) webbing flexes to accommodate movement and body contours for optimum comfort around legs and shoulders
2. User-friendly resettable lanyard keepers. Allows users to attach lanyard when not in use
3. Optimized label protection with self-contained and practical Velcro-label FR material pouch
4. Easy visual sizing
5. Outside personalization tag
6. Dedicated SRL web link for easy attachment of personal SRLs
7. Clearly identifiable smart impact indicators for hassle-free inspection
8. Improved visible stitch pattern for easy inspection
9. Offer with quick-connect (QC) buckles on legs and chest
10. Maximum worker weight capacity rated OSHA and CSA 420 lb and ANSI 360 lb
11. Meets OSHA 1926.502, certified ANSI Z359.11-2021, and CSA Z259.10-2018 CLASS A&AP.



SKU	Size	Back D-rings	Side D-rings	Chest Buckle	Leg Buckle	SRL Web Link (WL)
H5WS251	S/M					
H5WS252	Universal	✓		Quick-connect	Quick-connect	✓
H5WS253	XXL					
H5WS151	S/M					
H5WS152	Universal	✓	✓	Quick-connect	Quick-connect	✓
H5WS153	XXL					

The H500 Welding Series meets OSHA and certified ANSI Z359.11 and CSA Z259.10 standards. Rated up to 420 lb (max. weight capacity).



BODY WEAR

SPECIALTY HARNESS

MS. MILLER HARNESS

The E570 Ms. Miller Harness is the only full-body harness on the market specifically designed for the female worker. The special design keeps shoulder straps at the side and away from the chest, offers better hip support, and increases comfort.



SKU	Size	Back D-ring	Side D-rings	Front D-ring	Chest Strap Buckle	Leg Strap Buckles
E570/XS/XXSRN	XS/M	✓		✓	Mating	Mating
E570/S/MRN	S/M					
E570/URN	Universal					
E570-7/XS/XXSRN	XS/M	✓	✓	✓	Mating	Mating
E570-7/S/MRN	S/M					

The Ms. Miller Series meets OSHA and ANSI standards.
Rated up to 420 lb (max. weight capacity).

SAF-T-CLIMB HARNESS

The Miller Saf-T-Climb Harness was designed for use with the Saf-T-Climb ladder system.

Harness features include:

- Bayonet buckles allow easy single action for a secure connection.
- The integral back/shoulder pad eliminates tangling of the harness straps, wicks away moisture, and provides all-day comfort.
- Lumbar padding, single back D-ring, single front D-ring, two side D-rings and two shoulder D-rings are all included.



SKU	Size	Back D-ring	Side D-ring	Frontal D-ring	Shoulder D-rings	Chest Buckle	Leg Buckles
739-201-001	M	✓	✓	✓	✓	Quick-connect	Quick-connect
739-201-002	L						
739-201-003	XL						

The Saf-T-Climb Series meets OSHA and ANSI standards.
Rated up to 420 lb (max. weight capacity).

BODY WEAR

HARNESS ACCESSORIES

ONE-PULL RELIEF STEP™

The ONE-PULL TRAUMA RELIEF STEP offers a cutting-edge solution for addressing suspension trauma. We have significantly streamlined the typically four-step operation process into a single, efficient action. By incorporating a patented release mechanism, our system allows for the rapid engagement of two high-performance One-Pull Trauma Relief Steps—one for each foot.

This innovative design enables the suspended individual to effortlessly rise while secured in their body harness. Consequently, the pressure on the arteries and veins at the upper thighs is swiftly alleviated, minimizing the risk of severe injury or fatality. For detailed guidance, please refer to the User Quick Guide.



SKU	Description	Length	Width	Height	Weight	Deployed unit length
1038778	One-Pull Relief Step - 1 Pair	4.3 in.	2.75 in.	2.18 in.	0.26 lb.	53 in.



RELIEF STEP SAFETY DEVICE

The Miller Relief Step Safety Device alleviates the effects of orthostatic intolerance, also known as suspension trauma.

If a fall occurs, a person becomes suspended in a harness and remains both vertical and sedentary for a period of time, causing blood to 'pool' in the veins of the legs.

Subsequently, blood flow is restricted to the brain and other major organs that may initially result in unconsciousness.

If not rescued promptly, serious injury or death may occur.

The Miller Relief Step is designed to provide a short-term solution in preventing suspension trauma.

- Provides support and enhances blood circulation until rescue – permits the ability to move and flex leg muscles.
- Small and lightweight.
- Attaches to any brand full-body harness.
- Assures greater comfort until rescue is completed when utilizing two relief steps (one for each leg/foot).

SKU	Description
9099/1	Relief Step - 1 unit
9099/368ULK	Relief Step - 36 steps in bulk
9099X/12-H5	Relief Step - 12 relief steps in display box



BODY WEAR

HARNESS ACCESSORIES

SKU	Description
8928-27/18INBK	Web extension 18 in with a snap hook & D-ring on the opposite end
1816/18INBK	Web extension 18 in with a web loop & D-ring on the opposite end
1916K/18INBK	Revised web extension 18 in with a web loop & D-ring on the opposite end
1916B/18INBK	Web extension 18 in with a web loop & D-ring on the opposite end
8927/8INBK	Web D-ring extension 8 in
8927/18INBK	Web D-ring extension 18 in

BAGS

SKU	Description
7028/BK	Small Miller harness bag black
8280H/YL	Large Miller wrench bag yellow
8287H/YL	Tripped bag yellow
8477HL1/BK	Medium Miller gear bag black
UBPBA535L	Large backpack 35L gear bag black



1816/18INBK



8928-27/18INBK



7028



8280H



8287H



8477H

BODY WEAR

HARNESS ACCESSORIES

BODY BELTS

SKU	Size	Description
2NA/SBK	S	Body belt with tongue buckle, includes side D-rings & 3 in back pad
2NA/MBK	M	Body belt with tongue buckle, includes side D-rings & 3 in back pad
2NA/LBK	L	Body belt with tongue buckle, includes side D-rings & 3 in back pad
2NA/XLBK	XL	Body belt with tongue buckle, includes side D-rings & 3 in back pad
2NA/XXLBK	XXL	Body belt with tongue buckle, includes side D-rings & 3 in back pad
2NA/XXXLBK	XXXL	Body belt with tongue buckle, includes side D-rings & 3 in back pad
3NA/SBK	S	Body belt with tongue buckle, includes single D-ring & 3 in back pad
3NA/MBK	M	Body belt with tongue buckle, includes single D-ring & 3 in back pad
3NA/LBK	L	Body belt with tongue buckle, includes single D-ring & 3 in back pad
3NA/XLBK	XL	Body belt with tongue buckle, includes single D-ring & 3 in back pad
3NA/XXLBK	XXL	Body belt with tongue buckle, includes single D-ring & 3 in back pad
123N/SBK	S	Lined body belt with tongue buckle, includes single D-ring
123N/MBK	M	Lined body belt with tongue buckle, includes single D-ring
123N/LBK	L	Lined body belt with tongue buckle, includes single D-ring
123N/XLBK	XL	Lined body belt with tongue buckle, includes single D-ring
123N/XXLBK	XXL	Lined body belt with tongue buckle, includes single D-ring
123N/XXXLBK	XXXL	Lined body belt with tongue buckle, includes single D-ring
124N/SBK	S	Lined body belt with tongue buckle, includes side D-rings
124N/MBK	M	Lined body belt with tongue buckle, includes side D-rings
124N/LBK	L	Lined body belt with tongue buckle, includes side D-rings
124N/XLBK	XL	Lined body belt with tongue buckle, includes side D-rings
124N/XXLBK	XXL	Lined body belt with tongue buckle, includes side D-rings
6414N/SBK	S	Body web black belt 1-3/4 in with tongue buckle with 11 grommets
6414N/MBK	M	Body web black belt 1-3/4 in with tongue buckle with 11 grommets
6414N/LBK	L	Body web black belt 1-3/4 in with tongue buckle with 11 grommets
6414N/UBK	Universal	Body web black belt 1-3/4 in with tongue buckle with 11 grommets
6414N/XLBK	XL	Body web black belt 1-3/4 in with tongue buckle with 11 grommets

BODY BELT SIZING

Size	Measurements	Ordering Suffix
Small	31 in to 39 in	/SBK
Medium	35 in to 43 in	/MBK
Large	39 in to 47 in	/LBK
X-Large	42 in to 50 in	/XLBK
XX-Large	46 in to 54 in	/XXLBK



2NA



3NA



123N



124N



6414N





Connecting Devices

C

Fall Clearance Overview

Fall Clearance Overview	72
Swing Fall, Tripping Hazards	73

Self-Retracting Devices (SRD)/Personal Fall Limiters (PFL)

TurboLite™ Web	74
TurboLite™ Extensor	76
TurboLite™ Edge	77
TurboLite™ T-SAK™	78
TurboLite™ Hot Flash	79
Falcor™ Edge	80
MightyLule™	81
Falcor™	82
Titan™	83
DuraSeal™	84


Rope Grabs & Vertical Lifelines

Adjustable Cab Mount Bracket	85
Rope Grabs	85
Lifelines	86

Lanyards


Shock-Absorbing Lanyards

StretchStep™ Lanyards	87
HP™ Shock-Absorbing Lanyards	88
Vinyl-Coated Lanyards	88
BackBiter™ Tie-Back Lanyard	89
Titan™ II Tie-Back Lanyards	90
Rope, Cable, and Web Lanyards	90
Titan™ II Pack Type Shock-Absorbing Lanyards	91
Titan™ II Stretch Pack Type Shock-Absorbing Lanyards	91
Maynard™ II Stretchable Shock-Absorbing Lanyards	92
Maynard™ HP Shock-Absorbing Lanyards	93
Titan™ II Stretch Tubular Shock-Absorbing Lanyards	93
Titan™ II Tubular Shock-Absorbing Lanyards	93
Arc Flash Lanyards	94
Arc-Rated Shock Absorbing Lanyards	94
Welding Lanyards	95
Positioning/Restraint	
Lanyards (Rope, cable, web)	96
Positioning Assemblies	97
Positioning & Restraint Lanyards	97
Adjustable Rope Lanyards	97

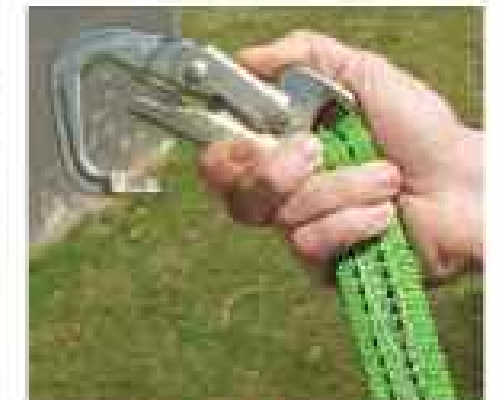


CONNECTING DEVICES INTRODUCTION

SELF-RETRACTING DEVICES (SRD) Overhead Anchor - Standing Position

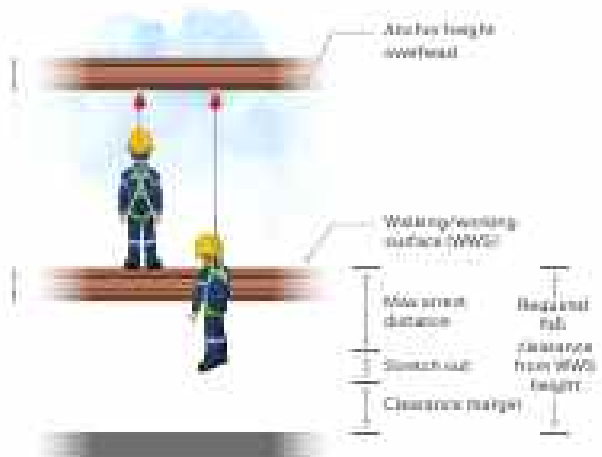

SHOCK-ABSORBING LANYARD Overhead Anchor - Standing Position

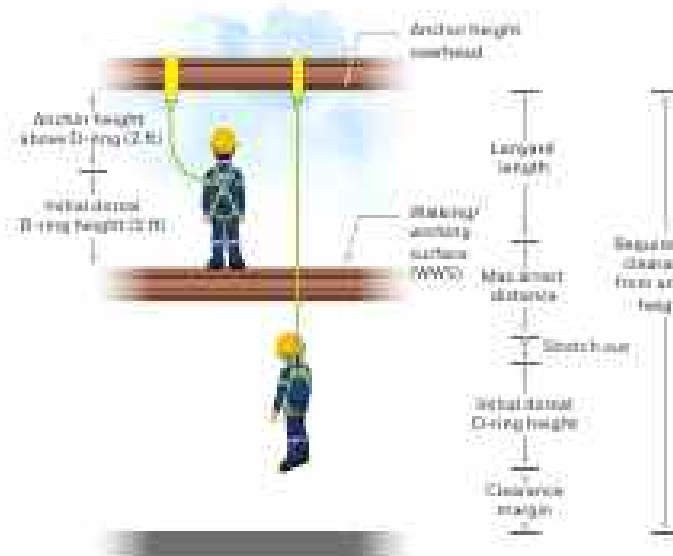


CONNECTING DEVICES INTRODUCTION


SELF-RETRACTING DEVICES (SRD) Swing Fall



SHOCK-ABSORBING LANYARD Swing Fall

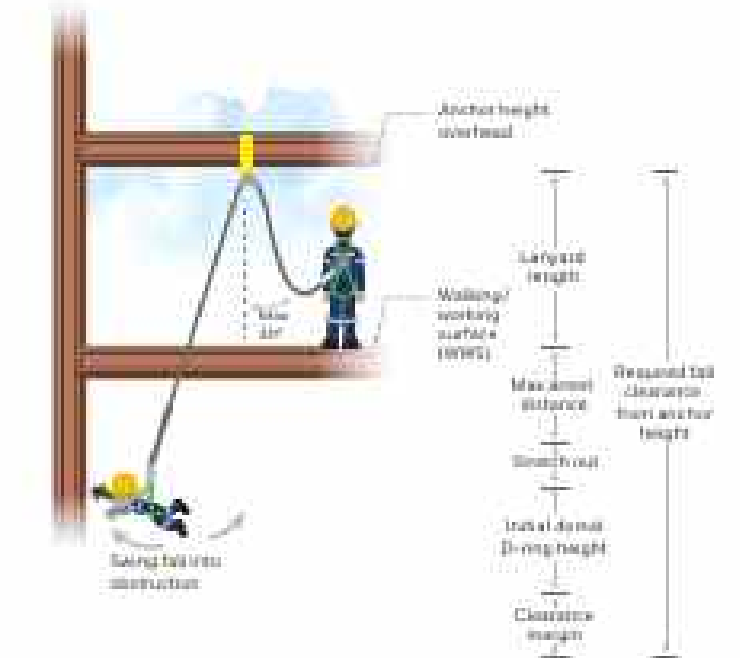

HORIZONTAL LIFELINE + SRD Overhead Anchor - Standing Position

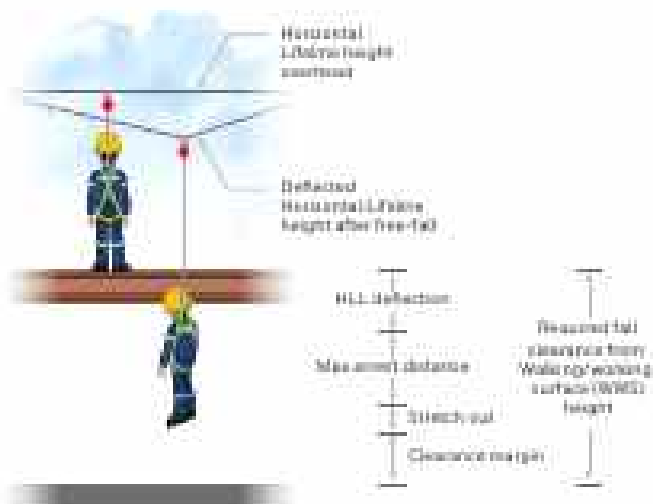

SELF-RETRACTING DEVICES (SRD) No Tripping Hazard - Overhead Anchor



SHOCK-ABSORBING LANYARD Tripping Hazard - Overhead Anchor



CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® WEB PFL

Discover the Miller TurboLite® Web PFL, a modern evolution within the PLUS family of self-retracting devices.

These fall protection systems are engineered for professionals who prioritize mobility and safety on the job site. Designed to meet or exceed OSHA, ANSI, and CSA standards, the TurboLite® supports workers up to 420 lb and features an updated design that integrates seamlessly with Miller harnesses, ensuring optimal performance and reliability in fall protection.

Features and Benefits

- Increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb.
- Meets OSHA 1926.502 /1910.140 and certified ANSI Z359.14-2021 Class 1 and CSA Z259.2 J-2017 Class SRL.
- Now available in 6 ft and 11 ft lengths.
- Combinations available for unit and lanyard ends.
- Available with lightweight aluminum to help reduce weight.
- Enhanced graphics, icons, and colors on UV-resistant scratch-proof labeling.
- New Miller look and feel, designs aligned with Miller harnesses for mix & match protection.
- High-impact resistant nylon housing.
- Abrasion-resistant webbing helps provide long service life.
- Integral swivel reduces lifeline twisting.



MTL-DHW1-01



MTL-DHW2-27

CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® PFL WEB

SKU	Length	Lifeline Type	Unit Connector	Lifeline Connector	Weight
MTL-DHW1-01/6FT	6 ft	Single	Steel carabiner	Steel locking snap hook	4.5 lb
MTL-DHW1-02/6FT	6 ft	Single	Steel carabiner	Steel locking ribbar hook	3.4 lb
MTL-DHW1-03/6FT	6 ft	Single	No unit connector	Steel locking snap hook	4 lb
MTL-DHW1-04/6FT	6 ft	Single	No unit connector	Steel locking ribbar hook	2.9 lb
MTL-DHW1-05/6FT	6 ft	Single	No unit connector	Steel locking swivel snap hook	3.1 lb
MTL-DHW1-06/6FT	6 ft	Single	No unit connector	Steel locking swivel ribbar hook	3 lb
MTL-DHW1-07/6FT	6 ft	Single	Aluminum carabiner	Aluminum locking snap hook	4.2 lb
MTL-DHW1-08/6FT	6 ft	Single	Aluminum carabiner	Aluminum locking ribbar hook	3.2 lb
MTL-DHW1-09/6FT	6 ft	Single	Steel D-ring swivel hook	Steel locking snap hook	4.5 lb
MTL-DHW1-10/6FT	6 ft	Single	Steel D-ring swivel hook	Steel locking ribbar hook	3.4 lb
MTL-DHW1-11/6FT	6 ft	Single	Steel locking snap hook	Steel locking snap hook	6 lb
MTL-DHW1-12/6FT	6 ft	Single	Steel locking snap hook	Steel locking ribbar hook	4.9 lb
MTL-DHW1-14/6FT	6 ft	Single	Aluminum locking snap hook	Aluminum locking snap hook	5.4 lb
MTL-DHW1-15/6FT	6 ft	Single	Aluminum locking snap hook	Aluminum locking ribbar hook	4.4 lb
MTL-DHW1-17/6FT	6 ft	Single	No unit connector	Aluminum locking ribbar hook	2.7 lb
MTL-DHW1-38/6FT	6 ft	Single	Aluminum carabiner	Aluminum carabiner	3.1 lb
MTL-DHW1-58/6FT	6 ft	Single	Aluminum carabiner	Aluminum locking ribbar hook	3.2 lb
MTL-DHW2-21/6FT	6 ft	Twin	G2 Twin connector	Steel locking snap hooks	8 lb
MTL-DHW2-22/6FT	6 ft	Twin	G2 Twin connector	Steel locking ribbar hook	5.8 lb
MTL-DHW2-27/6FT	6 ft	Twin	G2 Twin connector	Aluminum locking snap hook	7.4 lb
MTL-DHW2-28/6FT	6 ft	Twin	G2 Twin connector	Aluminum locking ribbar hook	5.4 lb
MTL-DHW1-01/11FT	11 ft	Single	Steel carabiner	Steel locking snap hook	5.1 lb
MTL-DHW1-03/11FT	11 ft	Single	No unit connector	Steel locking snap hook	4.5 lb
MTL-DHW1-04/11FT	11 ft	Single	No unit connector	Steel locking ribbar hook	3.4 lb
MTL-DHW1-05/11FT	11 ft	Single	No unit connector	Steel locking swivel snap hook	3.6 lb
MTL-DHW1-07/11FT	11 ft	Single	Aluminum carabiner	Aluminum locking snap hook	4.8 lb
MTL-DHW1-11/11FT	11 ft	Single	Steel locking snap hook	Steel locking snap hook	6.5 lb
MTL-DHW1-12/11FT	11 ft	Single	Steel locking snap hook	Steel locking ribbar hook	5.4 lb
MTL-DHW1-38/11FT	11 ft	Single	Aluminum carabiner	Aluminum carabiner	3.6 lb
MTL-DHW1-58/11FT	11 ft	Single	Aluminum carabiner	Aluminum locking ribbar hook	3.8 lb
MTL-DHW1-71/11FT	11 ft	Single	Steel locking ribbar hook	Steel locking snap hook	5.4 lb
MTL-DHW2-21/11FT	11 ft	Twin	G2 Twin connector	Steel locking snap hook	9.1 lb
MTL-DHW2-22/11FT	11 ft	Twin	G2 Twin connector	Steel locking ribbar hook	6.9 lb
MTL-DHW2-27/11FT	11 ft	Twin	G2 Twin connector	Aluminum locking snap hook	8.5 lb
MTL-DHW2-28/11FT	11 ft	Twin	G2 Twin connector	Aluminum locking ribbar hook	6.5 lb

CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® SCORPION PFL

Introducing the Miller TurboLite® Scorpion PFL, a standout member of the PLUS family of newly engineered self-retracting lifelines. Available in 7-ft, 8-ft, and 9-ft lengths, the Miller TurboLite Scorpion Personal Fall Limiter delivers enhanced mobility, safety, and versatility, making it a superior alternative to traditional shock-absorbing lanyards. With its innovative design, it offers users greater ease of use while ensuring compliance with safety standards.

Features and Benefits

- Increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb
- Meets OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 1, and CSA Z259.2-2-2017 Class SRL
- Available in 7-ft, 8-ft and 9-ft lengths
- Combinations available for unit and lanyard ends
- Available with lightweight aluminum to help reduce weight
- Enhanced graphics, icons, and colors on UV-resistant scratch-resistant labeling
- New Miller look and feel, designs aligned with Miller homegear for mix & match protection
- High-impact resistant nylon housing
- Integral swivel reduces lifeline twisting



SKU	Length	Lifeline Configuration	Unit Connector	Lifeline Connector	Weight
STL-DHS1-01/7FT	7 ft	Single	Steel carabiner	Steel locking snap hook	3.7 lb
STL-DHS1-01/8FT	8 ft	Single	Steel carabiner	Steel locking snap hook	4 lb
MTL-DHS1-01/8FT	8 ft	Single	Steel carabiner	Steel locking snap hook	6.2 lb
MTL-DHS1-05/8FT	8 ft	Single	No unit connector	Steel locking swivel snap hook	3.4 lb
MTL-DHS1-91/8FT	8 ft	Single	No unit connector	Steel locking snap hook	3.7 lb
MTL-DHS1-01/9FT	9 ft	Single	Steel carabiner	Steel locking snap hook	4.9 lb
MTL-DHS1-02/9FT	9 ft	Single	Steel carabiner	Steel locking ribbar hook	5 lb
MTL-DHS1-03/9FT	9 ft	Single	No unit connector	Steel locking snap hook	6.3 lb
MTL-DHS1-05/9FT	9 ft	Single	No unit connector	Steel locking swivel snap hook	3.4
MTL-DHS1-07/9FT	9 ft	Single	Aluminum carabiner	Aluminum locking snap hook	4 lb
MTL-DHS1-09/9FT	9 ft	Single	Steel D-ring swivel hook	Steel locking snap hook	6.3 lb
MTL-DHS1-11/9FT	9 ft	Single	Steel locking snap hook	Steel locking snap hook	6.3 lb
MTL-DHS1-14/9FT	9 ft	Single	Aluminum locking snap hook	Aluminum locking snap hook	3.8 lb
MTL-DHS1-15/9FT	9 ft	Single	Aluminum locking snap hook	Aluminum locking ribbar hook	5 lb
MTL-DHS1-16/9FT	9 ft	Single	No unit connector	Aluminum locking snap hook	3.2 lb
MTL-DHS1-17/9FT	9 ft	Single	No unit connector	Aluminum locking ribbar hook	4.2 lb
MTL-DHS1-31/9FT	9 ft	Single	Steel captive eye carabiner	Steel locking snap hook	4 lb
MTL-DHS1-38/9FT	9 ft	Single	Aluminum carabiner	Aluminum carabiner	3.4 lb
MTL-DHS1-55/9FT	9 ft	Single	Steel carabiner	Steel locking swivel snap hook	4.2 lb
MTL-DHS1-58/9FT	9 ft	Single	Aluminum carabiner	Aluminum locking ribbar hook	5 lb
MTL-DHS1-71/9FT	9 ft	Single	Steel locking ribbar hook	Steel locking snap hook	5.2 lb
MTL-DHS1-90/9FT	9 ft	Single	Steel swivel carabiner	Steel locking swivel snap hook	4.2 lb
MTL-DHS2-11/9FT	9 ft	Twin	G2 Twin connector	Steel locking snap hook	6.8 lb
MTL-DHS2-22/9FT	9 ft	Twin	G2 Twin connector	Steel locking ribbar hook	8.8 lb
MTL-DHS2-27/9FT	9 ft	Twin	G2 Twin connector	Aluminum locking snap hook	6.4 lb
MTL-DHS2-28/9FT	9 ft	Twin	G2 Twin connector	Aluminum locking ribbar hook	8 lb

CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® EDGE CABLE PFL

Introducing the Miller TurboLite® Edge cable, a proud addition to the PLUS family of newly redesigned self-retracting devices (SRDs). The TurboLite® Edge PFLs are engineered to provide the reliability and assurance that Miller is known for, available in a diverse selection of lengths to suit your needs.

Specifically designed for edge applications, TurboLite® Edge PFLs enhance versatility and user mobility while prioritizing maximum safety. Discover the perfect solution for your safety needs with the TurboLite® Edge cable.

Features and Benefits


- **Safe** - Edge cable units meet the most stringent safety standards. Meets OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 2, and CSA Z259.2-2-2017 Class SRL-LE
- **Versatile** - Can be connected at foot level and above worker D-ring, increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb
- **Compact and lightweight** - Helps reduce your fatigue, increase your productivity. A single-pin harness connection design for fast and easy operation
- **Configurable** - A wide range of working lengths in cable (8-ft and 9-ft) with a variety of lifeline connectors in both steel and aluminum options
- **Durability** - High-impact nylon housing
- **Twin models available** - Provide for 100% tie-off connection

Lifeline Configuration	SKU Length 6 FT	Unit Connector	Lifeline End Connector	Weight
Single	MTL-LEP1-61/6FT	Aluminum harness one pin connector	Steel locking snap hook	9.2 lb
	MTL-LEP1-62/6FT		Steel locking ribbar hook	4.6 lb
	MTL-LEP1-63/6FT		Aluminum captive eye carabiner	3.3 lb
	MTL-LEP1-67/6FT		Aluminum locking snap hook	3.7 lb
	MTL-LEP1-68/6FT		Aluminum locking ribbar hook	4.6 lb

Twin	MTL-LEP2-61/6FT	Aluminum harness one pin connector	Steel locking snap hook	7.0 lb
	MTL-LEP2-62/6FT		Steel locking ribbar hook	9.2 lb
	MTL-LEP2-63/6FT		Aluminum captive eye carabiner	6.6 lb
	MTL-LEP2-67/6FT		Aluminum locking snap hook	6.8 lb
	MTL-LEP2-68/6FT		Aluminum locking ribbar hook	9.0 lb

Lifeline Configuration	SKU Length 9 FT*	Unit Connector	Lifeline End Connector	Weight
Single	MTL-LEP1-61/9FT	Aluminum harness one pin connector	Steel locking snap hook	4.8 lb
	MTL-LEP1-62/9FT		Steel locking ribbar hook	5.1 lb
	MTL-LEP1-63/9FT		Aluminum captive eye carabiner	4.4 lb
	MTL-LEP1-67/9FT		Aluminum locking snap hook	4.8 lb
	MTL-LEP1-68/9FT		Aluminum locking ribbar hook	5.5 lb
Twin	MTL-LEP2-61/9FT	Aluminum harness one pin connector	Steel locking snap hook	8.8 lb
	MTL-LEP2-62/9FT		Steel locking ribbar hook	9.4 lb
	MTL-LEP2-63/9FT		Aluminum captive eye carabiner	6.3 lb
	MTL-LEP2-67/9FT		Aluminum locking snap hook	6.8 lb
	MTL-LEP2-68/9FT		Aluminum locking ribbar hook	8.5 lb

*9-ft models are OSHA and ANSI certified only



MTL-LEP1-61



MTL-LEP2-62

CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® T-BAK™ PFL
PERSONAL FALL LIMITERS

The first retractable designed to tie-back anywhere along the lifeline.

The Turbolite® T-Bak is now featuring a 9-ft lifeline offering greater anchorage flexibility across a variety of beam sizes. This all-in-one SRL eliminates the need for a separate anchorage connector delivering next-level protection and efficiency in demanding work environments.

- Increased weight rating as per OSHA to 420 lb and rated ANSI 310 lb
- Meets requirements of OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 1
- Now featuring a 9-ft lifeline, allowing worker to tie-back the full length of the webbing without restrictions
- High-impact resistant nylon housing
- Integral swivel on the housing to reduce lifeline twisting. A single-pin harness connection design for fast and easy operation
- Miller SK® locking snap hook designed specifically for tie-back use with 5,000 lb gate load capacity from any angle
- Engineered from Vectran®/Polyester material with high-tech strength and abrasion-resistant webbing. Available exclusively with Miller brand products
- White side stripe stitching indicates that it is specially designed for tie-back use



MTL-DTB1-9-4/9FT

SKU	Length	Lifeline Configuration	Description	Lifeline Connector	Weight
MTL-DTB1-6-4/9FT	9 ft	Single	Aluminum harness one pin connector	Zinc-plated steel Miller SK snap hook	3.6 lb
MTL-DTB2-6-4/9FT	9 ft	Double	Aluminum harness one pin connector	Zinc-plated steel Miller SK snap hook	6.2 lb




CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

TURBOLITE® HOT FLASH PFL

The Miller Turbolite® Hot Flash Personal Fall Limiter (PFL) is designed specifically for those who work at height and are exposed to arc flash hazards or high heat areas, such as hot work applications. This PFL helps provide versatility, reliability and maximum safety across any hot work application involving cutting, welding, soldering, grinding, or any similar activity producing a spark, flame, or heat.

- Increased weight rating as per OSHA to 420 lb and rated ANSI 310 lb
- Meets OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 1, and ASTM F887
- An all-in-one solution for arc flash and hot work applications
- High-impact housing with integral shock absorber
- Features a web lifeline comprised of Kevlar and Nomex materials which provides resistance to flame, heat, and burns
- Designed to maintain flame resistance of up to 40±5 cal/cm² in addition to providing flame resistance



MTL-AFA1-63

Lifeline Configuration	SKU - Length 4.5 FT	Unit Connector	Lifeline End Connector
Single	MTL-AFA1-63/4.5FT	Aluminum harness one pin connector	Aluminum captive eye carabiner
	MTL-AFA1-67/4.5FT		Aluminum locking snap hook

Lifeline Configuration	SKU - Length 6 FT	Unit Connector	Lifeline End Connector
Single	MTL-AFB1-30/6FT	Kevlar web loop	Aluminum locking snap hook
	MTL-AFB1-37/6FT	Aluminum captive eye carabiner	Aluminum locking snap hook
	MTL-DAF1-01/6FT	Steel carabiner	Steel locking snap hook

Single	MTL-DAF1-61/6FT	Aluminum harness one pin connector	Steel locking snap hook
	MTL-DAF1-63/6FT		Aluminum captive eye carabiner
	MTL-DAF1-65/6FT		Steel locking swivel snap hook
	MTL-DAF1-67/6FT		Aluminum locking snap hook

Twin	MTL-DAF2-61/6FT	Aluminum harness one pin connector	Steel locking snap hook
	MTL-DAF2-63/6FT		Aluminum captive eye carabiner
	MTL-DAF2-65/6FT		Steel locking swivel snap hook
	MTL-DAF2-67/6FT		Aluminum locking snap hook

Lifeline Configuration	SKU - Length 9 FT	Unit Connector	Lifeline End Connector
Single	MTL-DAF1-62/9FT	Aluminum harness one pin connector	Steel locking ratchet hook
	MTL-DAF1-65/9FT		Steel locking swivel snap hook
	MTL-DAF1-67/9FT		Aluminum locking snap hook
	MTL-DAF1-68/9FT		Aluminum locking ratchet hook

Twin	MTL-DAF2-62/9FT	Aluminum harness one pin connector	Steel locking ratchet hook
	MTL-DAF2-65/9FT		Steel locking swivel snap hook
	MTL-DAF2-67/9FT		Aluminum locking snap hook
	MTL-DAF2-68/9FT		Aluminum locking ratchet hook



CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

Falcon+ SRL

The Miller Falcon+ Edge is designed to protect a worker in applications where the lifeline could meet an edge, in event of a fall, or where foot level tie-off is needed. This self-retracting lifeline features an integrated shock absorber pack attached to the end of the lifeline, connected to the worker. The Falcon+ Edge can also be used in overhead applications as a traditional self-retracting lifeline.

Features and Benefits

- Increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb
- Edge cable units meet the most stringent safety standards. Meets OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 2, and CSA Z259.2 2-2017 Class SRL-LE
- Available in galvanized steel cable, 20-ft, 30-ft and 50-ft working lengths to cover a wide range of applications
- Helps provide protection for all working at height situations – horizontal, vertical, mounted overhead, anchored at foot level, and work near edges
- Dual swivels (unit top and snap hook) included on all cable models to provide support and leverage when attaching to anchorage connector providing easy installation
- No annual factory recertification required (U.S. only)



MPS-LEP1-02/50FT

SKU	Length	Product Name	Unit Connector	Lifeline Connector	Weight
MPS-LEP1-02/20FT	20 ft	Falcon+ Edge	Steel carabiner	Steel swivel snap hook	11 lb
MPS-LEP1-02/30FT	30 ft	Falcon+ Edge	Steel carabiner	Steel swivel snap hook	14.3 lb
MPS-LEP1-02/50FT	50 ft	Falcon+ Edge	Steel carabiner	Steel swivel snap hook	17.4 lb
MPS-LES1-02/20FT	20 ft	Falcon+ Edge Kevlar Pack	Steel carabiner	Steel swivel snap hook	11 lb
MPS-LES1-02/30FT	30 ft	Falcon+ Edge Kevlar Pack	Steel carabiner	Steel swivel snap hook	14.3 lb
MPS-LES1-02/50FT	50 ft	Falcon+ Edge Kevlar Pack	Steel carabiner	Steel swivel snap hook	17.4 lb



CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)/PERSONAL FALL LIMITERS (PFL)

MIGHTYLITE+ SRL

The Miller MightyLite+ SRD, part of the PLUS family, delivers exceptional safety performance and reliability for various applications, including construction and industrial spaces. Its compact design features swivels for easy mounting and is constructed with corrosion-resistant materials for long-lasting durability.

- Increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb
- Meets requirements of OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 1
- Enhanced graphics, icons, and colors on UV-resistant scratch-resistant labeling
- New Miller look and feel, designs aligned with Miller harnesses for max. match protection
- Available in 20 ft, 30 ft, 40 ft, 50 ft, 85 ft, 100 ft and 130 ft
- Available in galvanized, stainless steel, and kevlar
- Carabiner and tagline included
- Corrosion-resistant stainless steel and aluminum housing extend service life
- Integral swivel reduces lifeline twisting
- Quick-activating inertia brakes limit free fall to under two feet
- No annual factory recertification required (U.S. only)



MML-102L1-02/50FT

SKU	Length	Unit Connector	Lifeline Connector	Weight
Leading Galvanized Steel				
MML-DGC1-02/20FT	20 ft	Steel carabiner	Load indicator steel snap hook whorl	15 lb
MML-DGC1-02/30FT	30 ft	Steel carabiner	Load indicator steel snap hook whorl	14 lb
MML-DGC1-02/50FT	50 ft	Steel carabiner	Load indicator steel snap hook whorl	31 lb
MML-DGC1-02/100FT	100 ft	Steel carabiner	Load indicator steel snap hook whorl	51 lb
MML-DGC1-02/130FT	130 ft	Steel carabiner	Load indicator steel snap hook whorl	54 lb
Leading Stainless Steel				
MML-DSS1-01/20FT	20 ft	Stainless steel carabiner	Load indicator steel snap hook whorl	10.5 lb
MML-DSS1-01/30FT	30 ft	Stainless steel carabiner	Load indicator steel snap hook whorl	14 lb
MML-DSS1-01/50FT	50 ft	Stainless steel carabiner	Load indicator steel snap hook whorl	31 lb
MML-DSS1-01/100FT	100 ft	Stainless steel carabiner	Load indicator steel snap hook whorl	53 lb
MML-DSS1-01/130FT	130 ft	Stainless steel carabiner	Load indicator steel snap hook whorl	54 lb
Leading Kevlar				
MML-DHK1-02/40FT	40 ft	Steel carabiner	Load indicator steel snap hook whorl	14 lb
MML-DHK1-02/85FT	85 ft	Steel carabiner	Load indicator steel snap hook whorl	54 lb

CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)/PERSONAL FALL LIMITERS (PFL)

FALCON+ SRL

The Miller Falcon+ is a self-retracting device engineered to thrive in the most demanding conditions. Now part of the PLUS family, this redesigned device meets the latest global standards and features a lightweight, high impact resistant nylon construction for exceptional durability and performance.

- Increased weight rating as per OSHA to 420 lb and rated ANSI/CSA 310 lb.
- Meets requirements OSHA 1926.502/1920.140 and certified ANSI Z359.14-2021 Class 1, and CSA Z259.3 2-2017 Class SRL.
- Corrosion-resistant stainless steel and aluminum internal components extend service life and reduce replacement costs.
- Unique side payout design reduces wear on the entry guide bushing and cable for smooth operation with less drag.
- Available in galvanized steel cable 20-ft, 30-ft, and 50-ft options.
- Dual swivels (unit top and snap hook) included on all cable models to provide support and leverage when attaching to anchorage connector providing easy installation.
- No annual factory recertification required (U.S. only).

SKU	Length	Unit Connector	Lifeline Connector	Weight
MFS-DGCL-02/20FT	20 ft	Steel carabiner	Steel swivel snap hook	8.9 lb
MFS-DGCL-02/30FT	30 ft	Steel carabiner	Steel swivel snap hook	10.7 lb
MFS-DGCL-02/50FT	50 ft	Steel carabiner	Steel swivel snap hook	14.8 lb



MFS-DGCL-02/30FT



CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)/PERSONAL FALL LIMITERS (PFL)

TITAN+ CABLE SRL

The Miller Titan+ is a cost-effective rugged design for overhead applications. Rated to provide protection as per OSHA for up to a 420 lb worker, it showcases new user-friendly labels and design that aligns with Miller harnesses.

STANDARDS

- Meets requirements OSHA 1926.502 and the new ANSI Z359.14-2021 Class 1.

INCREASED WEIGHT RATING

- Increased weight rating up to 420 lb (190.5 kg) - OSHA

REDESIGNED LABELS

- Enhanced graphics, icons, and colors on UV-resistant, scratch-resistant labeling.
- New Miller look and feel, designs aligned with Miller harnesses for mix & match protection.
- High-impact resistant nylon housing.

SKU	Length	Unit Connector	Lifeline Connector	Weight	Max. Working Capacity	
					ANSI	OSHA
MTS-DGCL-02/30FT	30 ft	Steel carabiner	Steel swivel locking snap hook	10.7 lb	310 lb	420 lb
MTS-DGCL-02/50FT	50 ft	Steel carabiner	Steel swivel locking snap hook	14.8 lb	310 lb	420 lb



CONNECTING DEVICES

SELF-RETRACTING DEVICES (SRD)

DURASEAL™ SRL

The Miller DuraSeal Self-Retracting Lifeline (SRL) is designed to perform in the harshest environments including onshore and offshore oil and gas, mining, and petrochemical. The sealed technology, reusable brake system, field replaceable lifeline, and corrosion-resistant materials keep the product in the field to lower your cost of ownership.

Features and Benefits

- Prevents contaminants from entering the unit with highest industry rated sealed technology (IP69K)
- Built-to-last reusable brake design withstands multiple falls
- Quick, low-cost repair is achieved with field replaceable lifeline
- Reduces fatigue and increases productivity with units up to 30% lighter than competitive sealed units
- Enables quicker, easier installation and provides protection from rain
- Product service life is extended in the harshest environments with corrosion resistant components

DuraSeal with Cable Sling, Tagline and 2 Carabiners

SKU	Length	Lifeline Material	Weight
SSRL50S1	50 ft	Stainless steel	27.3 lb
SSRL100S1	100 ft	Stainless steel	59.7 lb
SSRL130S1	130 ft	Stainless steel	81.7 lb



DuraSeal with Cable Sling, Tagline, 2 Carabiners and 4-hole Mounting Plates

SKU	Length	Lifeline Material	Weight
SSRL50S2	50 ft	Stainless steel	81 lb
SSRL100S2	100 ft	Stainless steel	81 lb
SSRL130S2	130 ft	Stainless steel	83 lb

FIELD REPLACEABLE LIFELINE

The Miller Rapid Replace Line provides for quick, low-cost repair that can be performed by users in the field or an authorized Miller Rope & Cable Center. Each kit includes the cable assembly, a rubber plug, two shoulder screws, two entry guide screws, and two RFID clips.

SKU	Description	Weight
SSRL50SRR	50 ft Stainless steel replacement cable kit	4.8 lb
SSRL100SRR	100 ft Stainless steel replacement cable kit	8.4 lb
SSRL130SRR	130 ft Stainless steel replacement cable kit	9.9 lb



CONNECTING DEVICES

ROPE GRABS AND VERTICAL LIFELINES

MILLER ADJUSTABLE CAB MOUNT BRACKET

Easily accommodates Miller Turbolite® Web PFL and Miller Turbolite® Scorpion PFL

- The Miller Cab Mount Bracket can be easily mounted on the overhead guard stringer, extending less than 2 inches into the lift truck cab
- Adjustable side brackets promotes a custom fit of lift truck cabs from 3-3/4 in to 9-1/8 in
- Non-protruding mount provides greater head room
- Quick and easy installation increases productivity
- Heavy-duty, zinc-plated steel construction for greater durability and longer service life



SKU	Description
CMB/	Bracket only (Please refer to the Turbolite® Web or Turbolite® Scorpion single unit page for your PFL)
MTL-DHW1-03/6FT	Turbolite® Web 6 ft with dual locking snap hook
STL-DHS1-01/7FT*	Turbolite® Scorpion 7 ft with dual locking snap hook
MTL-DHS1-01/8FT*	Turbolite® Scorpion 8 ft with dual locking snap hook
MTL-DHS1-03/9FT	Turbolite® Scorpion 9 ft with dual locking snap hook
MTL-DHW1-03/11FT	Turbolite® Web 11 ft with dual locking snap hook

*-01 PFL SKUs will come with carabiners that will not be needed for the CMB/ bracket.

ROPE GRABS

Miller Rope Grabs move easily up and down vertical lifelines to provide continuous fall protection. Training models offer complete hands-free operation for increased productivity. In the event of a fall, Miller rope grabs lock quickly.

Features and Benefits

- Compact design, stainless steel construction
- Lightweight and easy to use
- Maximum working capacity 310 lb

SKU	Type	Use With Rope	Description
8173/U	Training Rope Grab	5/8	MicroLoc™ compact stainless steel rope grab
8174/U	Manual Rope Grab	5/8 or 3/4	Stainless steel rope grab
8174WLS-27/2FTYL	Manual Rope Grab	5/8 or 3/4	8174 w/attached 2-ft web lanyard w/locking snap hook
8174MLS4/AFTYL	Manual Rope Grab	5/8 or 3/4	8174 w/attached 4-ft Maryland™ shock-absorbing lanyard w/locking snap hook
8175/U	Training Rope Grab	5/8	Stainless steel rope grab
8175-27/	Training Rope Grab	5/8	Stainless steel rope grab with anti-panic feature
8175SLS-27/2FTYL	Training Rope Grab	5/8	8175 w/attached 2-ft web lanyard w/locking snap hook
8175SLS-27/3FTYL	Training Rope Grab	5/8	8175-27/ w/attached 3-ft SelfStop® shock absorber w/locking snap hook
8175WLS/3FTYL	Training Rope Grab	5/8	8175 w/attached 3-ft web lanyard w/locking snap hook

Locking snap hook: 3/4-in gate opening



CONNECTING DEVICES

ROPE GRABS AND VERTICAL LIFELINES

LIFELINES

Synthetic rope lifeline with a minimum tensile strength of 5,000 lb. Most common lifeline lengths are 25 ft, 50 ft, 75 ft, and 100 ft. Additional lengths are available.

SKU	Material	Size	Connectors	Color	Length
300L-ZT/10FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	10 ft
300L-ZT/25FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	25 ft
300L-ZT/30FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	30 ft
300L-ZT/50FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	50 ft
300L-ZT/75FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	75 ft
300L-ZT/100FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	100 ft
300L-ZT/125FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	125 ft
300L-ZT/150FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	150 ft
300L-ZT/200FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	200 ft
300L-ZT/250FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	250 ft
300L-ZT/500FTBL	Polyester/Polypropylene Blend	5/8	Locking snap hook/thimble	Blue	500 ft
194R-2/30FTWH	Nylon	5/8	Carabiner/thimble	White	30 ft
194R-2/50FTWH	Nylon	5/8	Carabiner/thimble	White	50 ft
195R-2/25FTWH	Nylon	5/8	2 Thimbles	White	25 ft
195R-2/75FTWH	Nylon	5/8	2 Thimbles	White	75 ft
195R-2/100FTWH	Nylon	5/8	2 Thimbles	White	100 ft
201RLS-2-ZT/20FTWH	Nylon Rope	5/8	2 Locking snap hook	White	20 ft
201RLS-2/25FTWH	Nylon Rope	5/8	2 Locking snap hook	White	25 ft
201RLS-2/30FTWH	Nylon Rope	5/8	2 Locking snap hook	White	30 ft
201RLS-2-ZT/50FTWH	Nylon Rope	5/8	2 Locking snap hook	White	50 ft
201RLS-5/25FTWH	Dac Polyester	5/8	2 Locking snap hook	White	25 ft
201RLS-5/50FTWH	Dac Polyester	5/8	2 Locking snap hook	White	50 ft
201RLS-5/100FTWH	Dac Polyester	5/8	2 Locking snap hook	White	100 ft
202RRS-2/25FTWH	Nylon	5/8	Locking snap hook/hibar steel hook	White	25 ft
202RRS-2/50FTWH	Nylon	5/8	Locking snap hook/hibar steel hook	White	50 ft
202RRS-2/125FTWH	Nylon	5/8	Locking snap hook/hibar steel hook	White	100 ft



300L-ZT/100FTBL



41755LS-ZT/3FTVL

CONNECTING DEVICES

LANYARDS

STRETCHSTOP® LANYARDS
with SofStop® Shock Absorber

- StretchStop Lanyards contract 6 ft to 4 ft, greatly reducing the chances of tripping, snagging, or dragging.
- Includes a heavy-duty back-up safety strap.
- SofStop Shock Absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces.
- Working load of 310 lb and features a warning flag to indicate that it has arrested a fall.



9135S-ZT/6FTGN



8198SS-ZT/6FTGN

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
9135S-ZT/6FTGN	Webbing	One	Locking snap hook	Locking snap hook	6 ft
913RSS-ZT/6FTGN	Webbing	One	Locking snap hook	Locking roller hook	6 ft
8198SS-ZT/6FTGN	Webbing	Two	Locking snap hook	Locking snap hook	6 ft
8198RSS-ZT/4FTGN	Webbing	Two	Locking snap hook	Locking roller hook	4 ft
8198RSS-ZT/6FTGN	Webbing	Two	Locking snap hook	Locking roller hook	6 ft

Locking snap hook 3/4" in gate opening. Locking roller hook 2-1/2" in gate opening.


All connectors include 1,600 lb gate strength.

STRETCHSTOP LANYARDS
with Rescue Loops and MAX SofStop Shock Absorber

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Feature
940RSS-BL-ZT/6FTGN	Webbing	One	Locking snap hook	Locking roller hook	Steel ring
980RSS-BR-ZT/6FTGN	Webbing	Two	Locking snap hook	Locking roller hook	Steel ring

The Miller Lanyard "O-ring" option solves this concern by allowing the retractable to be attached to the lanyard O-ring, while the lanyard remains connected to the back O-ring of the harness. Always be connected to one anchor at the time.

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Feature
980RSSC-Z/6FT	Webbing	Two	Locking snap hook	Locking roller hook	Steel ring

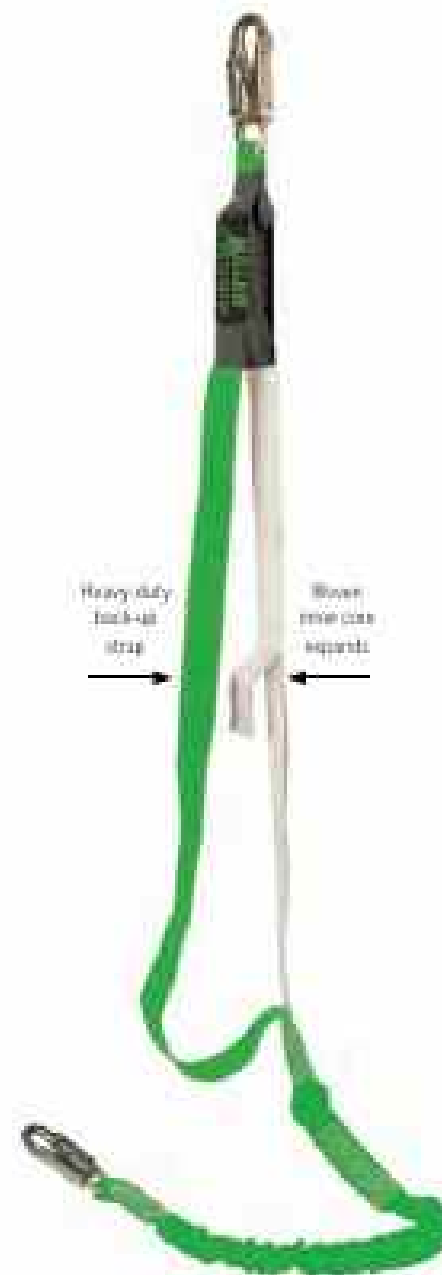

980RSS-BR-ZT/6FTGN

CONNECTING DEVICES

LANYARDS

HP™ LANYARDS with SofStop Shock Absorber

The Miller HP Lanyards are a collection of the most popular standard Miller brand lanyards with SofStop Shock Absorbers.

- SofStop Shock Absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Includes heavy-duty back-up safety strap

SKU	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Length
910TWLS-2T/6FTGN	One	Locking snap hook	Locking snap hook	Adjustable	6 ft.
913TWLS-2T/3FTGN	One	Locking snap hook	Locking snap hook	-	3 ft.
913TWLS-2T/4FTGN	One	Locking snap hook	Locking snap hook	-	4 ft.
913TWLS-2T/6FTGN	One	Locking snap hook	Locking snap hook	-	6 ft.
8798T-2T/3FTGN	Two	Locking snap hook	Locking snap hooks	-	3 ft.
8798T-2T/6FTGN	Two	Locking snap hook	Locking snap hooks	-	6 ft.
8798TR-2T/6FTGN	Two	Locking snap hook	Locking roller hooks	-	6 ft.
8878T-2T/6FTGN	Two	Locking snap hook	Locking snap hooks	Adjustable	6 ft.

Locking snap hook 3/4-in. gate opening. Large locking roller hook 2-1/2-in. gate opening.

All connectors include 3,600-lb. gate strength.

VINYL-COATED SHOCK-ABSORBING LANYARDS


Miller Vinyl-Coated Shock-Absorbing Lanyards feature a special vinyl coating on the webbing to protect against a variety of liquids that could compromise overall performance. Miller Vinyl-Coated Products are effective in a wide range of applications, including food processing, petrochemical, water treatment, painting, billboards, and general industry.

- SofStop Shock Absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Includes heavy-duty back-up safety strap
- Zinc-plated steel snap hooks

SKU	Number of Legs	Harness Connection	Anchorage Connection	Length
922PCR/SFTGN	One	Locking snap hook	Locking roller hook	6 ft.
8798PC/SFTGN	Two	Locking snap hook	Locking snap hook	6 ft.
8798PCR/SFTGN	Two	Locking snap hook	Locking roller hook	6 ft.

Locking snap hook 3/4-in. gate opening. Large locking roller hook 2-1/2-in. gate opening.

All connectors include 3,600-lb. gate strength.

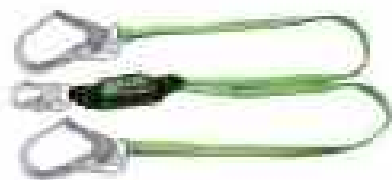

8798TR-2T/6FTGN



913TWLS-2T/6FTGN



913PC/SFTGN



8798PCR/SFTGN

CONNECTING DEVICES

LANYARDS

BACKBITER® TIE-BACK LANYARDS

The innovative Miller BackBiter Tie-Back Lanyard with the Miller SK Snap Hook was designed from top to bottom for tie-back use.

- First snap hook with a 5,000 lb. gate load capacity from any angle
- All in-one lanyard with SofStop Shock Absorber and cross-arm anchorage connector
- SofStop Shock Absorber pack is designed with a specially-woven inner core that smoothly expands to reduce fall arrest forces
- Heavy-duty polyester webbing and Cordura® nylon webbing with five times more abrasion resistance



913B/SFTGN



8798B/SFTGN

SKU	Special Features	Number of Legs	Harness Connection	Anchorage Connection	Length
913B/SFTGN		One	Locking snap hook	SK snap hook	6 ft.
913B/6FTGN		One	Locking snap hook	SK snap hook	6 ft.
940B/6FTGN	SofStop Double Pack™	One	Locking snap hook	SK snap hook	6 ft.
980B/6FTGN	SofStop Double Pack™	Two	Locking snap hook	SK snap hooks	6 ft.

™SofStop Double Pack rated 3,600-lb. capacity

The Miller Lanyard "O-ring" option solves this concern by allowing the retractable to be attached to the lanyard O-ring, while the lanyard remains connected to the back O-ring of the harness. Always be connected to one anchor at the time.

SKU	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Length
9138D/SFTGN	One	Locking snap hook	SK snap hook	1-Steel O-ring	6 ft.

WELDING APPLICATION

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
8798B/6FTGN	Kevlar webbing	One	Locking snap hook	SK snap hook	6 ft.

Locking snap hook 3/4-in. gate opening. All connectors include 3,600-lb. gate strength.

Cordura is a registered trademark of E.I. DuPont.



Featuring the Miller SK® Snap Hook



CONNECTING DEVICES

LANYARDS

TITAN II TIE-BACK LANYARDS
with Pack-Type Shock Absorbers

- Titan Tie-Back Lanyards with pack-type shock absorbers are designed for tie-back use, eliminating the need for a separate anchorage connector.
- Special webbing for greater abrasion resistance.
- Shock absorber pack keeps fall forces at or below 900 lb/ft.



TE111TB-ZT/6FTAF

SKU	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Length
TE111TB-ZT/6FTAF	One	Locking snap hook	Auto-lock container	Forged sliding D-ring	6 ft
TE111TB-ZT/6FTAF	Two	Locking snap hook	Auto-lock container	Forged sliding D-ring	6 ft

Locking snap hook 3/4" in gate opening. All connectors include 3,600 lb gate strength.

ROPE, CABLE, AND WEB LANYARDS
with SoftStop Shock Absorber

- SoftStop Shock Absorber pack is designed with a specially-woven inner-core that smoothly expands to reduce fall arrest forces.



B10WLS/6FTYL



92BL5-ZT/18INBK



907NLS-ZT/6FTYL



907NLS-ZT/6FTYL

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Length
901RL5-B-ZT/6FTWH	Nylon Rope	One	Locking snap hook	Locking snap hook	-	6 ft
907NLS-ZT/6FTYL	Vinyl-coated cable	One	Locking snap hook	Locking snap hook	-	6 ft
B10WLS/6FTYL	Webbing	One	Locking snap hook	Locking snap hook	Adjustable	4 ft to 6 ft
940WLS-ZT/6FTGN	Webbing	One	Locking snap hook	Locking snap hook	SoftStop Double Pack**	6 ft
980RSSO-Z/6FT	Webbing with D-ring	Two	Locking snap hook	Locking rebar hooks	SoftStop Double Pack**	6 ft
980WLS-ZT/6FTGN	Webbing	Two	Locking snap hook	Locking snap hooks	SoftStop Double Pack**	6 ft
980WRS-ZT/6FT	Webbing	Two	Locking snap hook	Locking rebar hooks	SoftStop Double Pack**	6 ft
92BL5-ZT/18INBK	Webbing	Two	Locking snap hook	Locking snap hooks	SoftStop Double Pack**	6 ft

**SoftStop Double Pack rated CSA 400 lb capacity.

Locking snap hook 3/4" in gate opening. Locking rebar hook 2 1/2" in gate opening. All connectors include 3,600 lb gate strength.

CONNECTING DEVICES

LANYARDS

TITAN II PACK-TYPE
Shock-absorbing Lanyards

Include the shock absorber pack as an integral part of a standard lanyard. In the event of a fall, the pack smoothly expands to reduce fall forces while a back-up safety strap deploys for added fall protection.



TE111-ZT/6FTAF

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
TE111-ZT/3FTAF	Webbing	One	Locking snap hook	Locking snap hook	3 ft
TE111-ZT/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	6 ft
TE111V/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	Adjustable 4 ft to 6 ft
TE112/6FTAF	Webbing	One	Locking snap hook	Locking rebar hook	6 ft
TE121-ZT/6FTAF	Webbing	Two	Locking snap hook	Locking snap hooks	6 ft
TE122-ZT/4FTAF	Webbing	Two	Locking snap hook	Locking rebar hooks	4 ft
TE122-ZT/6FTAF	Webbing	Two	Locking snap hook	Locking rebar hooks	6 ft

Locking snap hook 3/4" in gate opening. Large locking rebar hook 2 1/2" in gate opening. All connectors include 3,600 lb gate strength.

TITAN II STRETCH PACK-TYPE
Shock-absorbing Lanyards

Contract from 6 ft to 4 ft to reduce tripping hazard and smoothly expand to reduce fall forces while a back-up safety strap deploys for added fall protection.



TE112SS-ZT/6FTAF

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
TE111SS/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	6 ft
TE112SS/6FTAF	Webbing	One	Locking snap hook	Locking rebar hook	6 ft
TE121SS/6FTAF	Webbing	Two	Locking snap hook	Locking snap hooks	6 ft
TE122SS-ZT/6FTAF	Webbing	Two	Locking snap hook	Locking rebar hooks	6 ft

Locking snap hook 3/4" in gate opening. Large locking rebar hook 2 1/2" in gate opening. All connectors include 3,600 lb gate strength.

CONNECTING DEVICES

LANYARDS

MANYARD II STRETCHABLE

Shock-absorbing Lanyards

Manyard II Lanyards contract 6 ft to 4 ft, greatly reducing the chances of tripping, snagging, or dragging.

- Specially-woven shock-absorbing inner core smoothly expands to reduce fall arrest forces.
- A heavy-duty outer jacket serves as a wear indicator and back-up strap to the red inner core for added safety.
- Working load of 310 lb and features a warning flag to indicate that it has arrested a fall.



SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
218M-27/4FTGN	Webbing	One	Locking snap hook	Locking snap hook	4 ft
218M-27/6FTGN	Webbing	One	Locking snap hook	Locking snap hook	6 ft
219M-4FTGN	Webbing	One	Locking snap hook	Locking ribbar hook	4 ft
219M-27/6FTGN	Webbing	One	Locking snap hook	Locking ribbar hook	6 ft
231M-27/6FTGN	Webbing	Two	Locking snap hook	Locking ribbar hooks	6 ft
231MAL/6FTGN	Webbing	Two	Aluminum snap hook	Aluminum ribbar hooks	6 ft
232M-27/6FTGN	Webbing	Two	Locking snap hook	Locking snap hooks	6 ft


Locking snap hook 3/4-in gate opening. Locking ribbar hook 2-1/2-in gate opening.
All connectors include 1,600-lb gate strength.

The Miller Lanyard "O-ring" option solves this concern by allowing the retractable to be attached to the lanyard O-ring, while the lanyard remains connected to the back D-ring of the harness. Always be connected to one anchor at the time.

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Special Feature	Length
219MO/6FTGN	Webbing	One	Locking snap hook	Locking ribbar hook	1 Steel O-ring	6 ft
232MORS-27/6FTGN	Webbing	One	Choke-off loop	Locking ribbar hook	1 Steel O-ring	6 ft

Manyard II Shock-absorbing Lanyard
Before and After Deployment

Always know your fall distance and select proper equipment to meet the fall clearance.
See pages 72-73 for details.

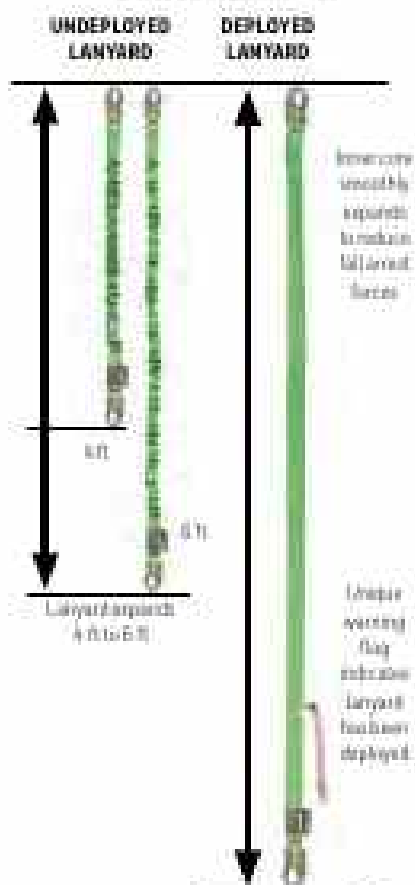

CONNECTING DEVICES

LANYARDS

MANYARD HP

Shock-absorbing Lanyards

With 20 years of design refinement, the "Original" Miller Manyard HP Shock-absorbing Lanyards feature:

- Specially-woven shock-absorbing inner core smoothly expands to reduce fall arrest forces.
- Heavy-duty tubular outer jacket serves as a back-up lanyard.
- Warning flag provides visual proof that a lanyard has been involved in a fall and must be removed from service.

SKU	Webbing Color	Number of Legs	Harness Connection	Anchorage Connection	Length
216WLS-27/4FTYL	Yellow	One	Locking snap hook	Locking snap hook	4 ft
216WLS-27/6FTYL	Yellow	One	Locking snap hook	Locking snap hook	6 ft
219WRS-27/6FTYL	Yellow	One	Locking snap hook	Locking ribbar hook	6 ft
216TWLS-27/6FTGN	Green	One	Locking snap hook	Locking snap hook	6 ft
219TWRS-27/6FTGN	Green	One	Locking snap hook	Locking ribbar hook	6 ft
231TWRS-27/6FTGN	Green	Two	Locking snap hook	Locking ribbar hooks	6 ft
232TWLS-27/6FTGN	Green	Two	Locking snap hook	Locking snap hooks	6 ft
233TWLS-27/6FTGN	Green	One	Choke-off loop	Locking snap hook	6 ft

Locking snap hook 3/4-in gate opening. Large locking ribbar hook 2-1/2-in gate opening.
All connectors include 1,600-lb gate strength.



TITAN II STRETCH TUBULAR

Shock-absorbing Lanyards

Contract from 6 ft to 4 ft to reduce tripping hazards and smoothly expand to reduce fall arrest forces, while the outer jacket serves as a back-up web lanyard.

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
T5111SS-27/6FTAF	Webbing	One	Locking snap hook	Locking snap hook	6 ft
T5112SS-27/6FTAF	Webbing	One	Locking snap hook	Locking ribbar hook	6 ft
T5122SS-27/6FTAF	Webbing	Two	Locking snap hook	Locking ribbar hooks	6 ft

Locking snap hook 3/4-in gate opening. Large locking ribbar hook 2-1/2-in gate opening.
All connectors include 1,600-lb gate strength.



TITAN II TUBULAR

Shock-absorbing Lanyards

Feature a built-in woven inner core that smoothly expands to reduce fall arrest forces, while the outer jacket serves as a back-up web lanyard.

SKU	Number of Legs	Harness Connection	Anchorage Connection	Length
T5111-27/6FTAF	One	Locking snap hook	Locking snap hook	6 ft
T5112-27/6FTAF	One	Locking snap hook	Locking ribbar hook	6 ft
T5121-27/6FTAF	Two	Locking snap hook	Locking snap hooks	6 ft
T5122-27/6FTAF	Two	Locking snap hook	Locking ribbar hooks	6 ft

Locking snap hook 3/4-in gate opening. Large locking ribbar hook 2-1/2-in gate opening.
All connectors include 1,600-lb gate strength.



CONNECTING DEVICES

LANYARDS

H500 ARC FLASH LANYARDS

- The polyamide webbing features a prominent red line, providing quick visual identification for Arc Flash applications. It is certified to ASTM F887 standards and rated for arc flash protection of 40 cal/cm².
- Galvanizing finish alloy steel rebar hook.
- Maximum worker weight capacity rated OSHA 400 lb and ANSI 310 lb.



SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Color	Length
FPLARCM-SUS	Polyamide 1.26-in web	One	Webbing loop	Rebar hook	Black	6 ft
FPLARCM-TUS	Polyamide 1.26-in web	Two	Webbing loop	Rebar hook	Black	6 ft

ARC-RATED SHOCK-ABSORBING LANYARDS

- Meets stringent ASTM F887 arc-flash standards.
- Designed to protect workers from electric arc-flash and arc-blast exposure.
- Arc-rated Kevlar webbing in both single- and double-legged models.
- Available with Kevlar choke-off loop for a "metal-less" connection.



H33BD-ZT/6FTBK

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
216MK-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking snap hook	6 ft
219MK-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking rebar hook	6 ft
233MK-ZT/6FTBK	Kevlar webbing	One	Choke-off loop	Locking snap hook	6 ft
233MKK/6FTBK	Kevlar webbing	One	Choke-off loop	Locking rebar hook	6 ft
913K-ZT/4FTBK	Kevlar webbing	One	Locking snap hook	Locking snap hook	4 ft
913K-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking snap hook	6 ft
913K-ZT/6FTBL	Kevlar webbing	One	Locking snap hook	Locking snap hook	6 ft
913KR-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking rebar hook	6 ft
933K-ZT/6FTBK	Kevlar webbing	One	Choke-off loop	Locking snap hook	6 ft
933KR-ZT/6FTBK	Kevlar webbing	One	Choke-off loop	Locking rebar hook	6 ft
8Y98K-ZT/6FTBK	Kevlar webbing	Two	Locking snap hook	Locking snap hooks	6 ft
8Y98KB/6FTBK	Kevlar webbing	Two	Locking snap hook	5K snap hooks	6 ft
8Y98KR/6FTBL	Kevlar webbing	Two	Locking snap hook	Locking rebar hooks	6 ft
8Y98KR-ZT/4FTBK	Kevlar webbing	Two	Locking snap hook	Locking rebar hooks	4 ft
8Y98KR-ZT/6FTBK	Kevlar webbing	Two	Locking snap hook	Locking rebar hooks	6 ft
8Y99KR-ZT/6FTBK	Kevlar webbing	Two	Choke-off loop	Locking rebar hooks	6 ft

Locking snap hook 3/4-in gate opening. Locking rebar hook 2-1/2-in gate opening. All connectors include 3,600 lb gate strength.

CONNECTING DEVICES

LANYARDS

H500 WELDING LANYARDS

These welding lanyards were specially developed for work at heights, whether it's welding, soldering, grinding or any other task that generates heat and spark. It's important to protect yourself at heights and your surroundings from the risks of fire, explosions, burns, and fumes.

- NEW! Specially formulated fire-resistant webbing for welding or metal cutting applications.
- Galvanized finish alloy steel connectors.
- Maximum worker weight capacity rated OSHA 400 lb and ANSI 310 lb.



SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Length
FPLWLL-SUS	Aramid 1.74-in web	One	Locking snap hook	Locking rebar hook	6 ft
FPLWLL-TUS	Aramid 1.74-in web	Two	Locking snap hook	Locking rebar hooks	6 ft

WELDING LANYARDS

- Shock-absorbing lanyards specifically designed for welding, soldering, grinding, or any other task that generates heat and spark.
- SelfStop shock absorber w/ Numex cover & Kevlar core.



90TK-ZT/6FTBL



940K-ZT/6FTBL

SKU	Material	Number of Legs	Harness Connection	Anchorage Connection	Special Features	Length
90TK-ZT/6FTBL	1/4-in cable	One	Locking snap hook	Locking snap hook	—	6 ft
940K-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking snap hook	SelfStop Double Pack**	6 ft
940KR-ZT/6FTBK	Kevlar webbing	One	Locking snap hook	Locking rebar hook	SelfStop Double Pack**	6 ft
980KR-ZT/6FTBK	Kevlar webbing	Two	Locking snap hook	Locking rebar hooks	SelfStop Double Pack**	6 ft

**SelfStop Double Pack rated OSHA 400 lb capacity.

Locking snap hook 3/4-in gate opening. Locking rebar hook 2-1/2-in gate opening. All connectors include 3,600 lb gate strength.

CONNECTING DEVICES

POSITIONING/RESTRAINT LANYARDS

HP POSITIONING AND RESTRAINT LANYARDS

Rope, cable, and web lanyards recommended for "work positioning" and "restraint" only.

- Rope lanyards are available in standard nylon or polyester (for greater chemical resistance) to meet user needs.
- Cable lanyards are heat resistant and highly abrasion resistant.
- Standard web lanyards are economical, abrasion resistant, and easy to clean.



201RLS-2-27/6FTWH



213TWLS-27/6FTGN



207LS-27/6FTG

SKU	Material	Harness Connection	Anchorage Connection	Special Features	Length
201RLS-8-27/6FTWH	Nylon rope 3/2 in.	Locking snap hook	Locking snap hook	—	2 ft
201RLS-8-37/6FTWH	Nylon rope 3/2 in.	Locking snap hook	Locking snap hook	—	3 ft
201RLS-8-27/4FTWH	Nylon rope 3/2 in.	Locking snap hook	Locking snap hook	—	4 ft
201RLS-8-27/6FTWH	Nylon rope 3/2 in.	Locking snap hook	Locking snap hook	—	6 ft
201RLS-8-8FTWH	Nylon rope 3/2 in.	Locking snap hook	Locking snap hook	—	8 ft
201RLS-2-27/3FTWH	Nylon rope 5/8 in.	Locking snap hook	Locking snap hook	—	3 ft
201RLS-2-27/6FTWH	Nylon rope 5/8 in.	Locking snap hook	Locking snap hook	—	6 ft
203RLS-27/6FTWH	Nylon rope 5/8 in.	Locking snap hook	Locking snap hook	Adjustable	6 ft
207LS-27/6FTG	Cable	Locking snap hook	Locking snap hook	—	6 ft
207LS-27/3FTG	Cable	Locking snap hook	Locking snap hook	—	3 ft
207LS-27/4FTG	Cable	Locking snap hook	Locking snap hook	—	4 ft
207NLS-27/3FTV	Vinyl-coated cable	Locking snap hook	Locking snap hook	—	3 ft
207NLS-27/6FTV	Vinyl-coated cable	Locking snap hook	Locking snap hook	—	6 ft
210TWLS-27/6FTGN	Webbing	Locking snap hook	Locking snap hook	Adjustable	6 ft
210TWLS-27/8FTGN	Webbing	Locking snap hook	Locking snap hook	Adjustable	8 ft
212WLS-27/3FTYL	Polyester webbing	Locking snap hook	Web loop	—	3 ft
210WLS-27/5FTYL	Polyester webbing	Locking snap hook	Locking snap hook	Adjustable	5 ft
210WLS-27/6FTYL	Polyester webbing	Locking snap hook	Locking snap hook	Adjustable	6 ft
213TWLS-27/2FTGN	Webbing	Locking snap hook	Locking snap hook	—	2 ft
213TWLS-27/3FTGN	Webbing	Locking snap hook	Locking snap hook	—	3 ft
213TWLS-27/4FTGN	Webbing	Locking snap hook	Locking snap hook	—	4 ft
213TWLS-27/6FTGN	Webbing	Locking snap hook	Locking snap hook	—	6 ft
213WLS-27/3FTYL	Polyester webbing	Locking snap hook	Locking snap hook	—	3 ft
213WLS-27/4FTYL	Polyester webbing	Locking snap hook	Locking snap hook	—	4 ft
213WLS-27/6FTYL	Polyester webbing	Locking snap hook	Locking snap hook	—	6 ft
213WLS-27/8FTYL	Polyester webbing	Locking snap hook	Locking snap hook	—	8 ft
226WRS-27/3FTYL	Polyester webbing	Locking snap hook	Locking ratchet hook	—	3 ft
226WRS-27/4FTYL	Polyester webbing	Locking snap hook	Locking ratchet hook	—	4 ft
226WRS-27/6FTYL	Polyester webbing	Locking snap hook	Locking ratchet hook	—	6 ft
226TWRS-27/2FTGN	Polyester webbing	Locking snap hook	Locking ratchet hook	—	2 ft
226TWRS-27/3FTGN	Polyester webbing	Locking snap hook	Locking ratchet hook	—	3 ft

Locking snap hook 3/4 in gate opening. Locking ratchet hook 2-1/2 in gate opening. All connections include 3,000 lb gate strength.

CONNECTING DEVICES

POSITIONING/RESTRAINT LANYARDS

HP POSITIONING AND ASSEMBLIES

SKU	Description
6756RS-27/	13-link roller chain assembly with locking roller hook, attached swivel, and two locking snap hooks.
675TWRS-27/35INGN	Roller web assembly with locking roller hook and two locking snap hooks, 35 in long.
675TWRS-27/27INGN	Roller web assembly with locking roller hook and two locking snap hooks, 27 in long.
6756RSA-27/	4-link roller chain assembly with two locking snap hooks and one locking roller hook, swivel attachment.

Locking snap hook 3/4 in gate opening. Locking roller hook 2-1/2 in gate opening.

All connections include 3,000 lb gate strength.

TITAN POSITIONING ASSEMBLIES

SKU	Description
T8221-27/	Roller chain assembly w/two locking snap hooks & one large locking roller hook.
T8221W-27/27INYL	Web positioning assembly w/two locking snap hooks & one large locking roller hook.

Locking snap hook 3/4 in gate opening. Locking roller hook 2-1/2 in gate opening.

TITAN II POSITIONING AND RESTRAINT LANYARDS

Rope and web lanyards recommended for "work positioning" and "restraint" only.

SKU	Harness Material	Connection	Anchorage Connection	Length
T9111R-27/6FTWH	Rope 5/8 in.	Locking snap hook	Locking snap hook	6 ft
T9111W-27/4FTAF	Webbing	Locking snap hook	Locking snap hook	4 ft
T9111W-27/6FTAF	Webbing	Locking snap hook	Locking snap hook	6 ft
T9112W-27/6FTAF	Webbing	Locking snap hook	Locking roller hook	6 ft

Locking snap hook 3/4 in gate opening. Locking roller hook 2-1/2 in gate opening.

All connections include 3,000 lb gate strength.

ADJUSTABLE ROPE LANYARD

The Adjustable Rope Lanyard is designed for work positioning while transitioning around obstacles. It must not be used for fall protection.

SKU	Description
ARL-100-27/8FT	3/8-in polyamide low modulus rope, 8 ft



6756RS-27/



675TWG-27/35INGN



675TWG-27/27INGN



675RSA-27/



T8221-27/



T8221W-27/27INYL



T9111R-27/6FTWH



T9111W-27/6FTAF

T9112W-27/6FTAF


ARL-100-27/8FT



Rescue and Confined Space



DuraHost™ Portable Confined Space System	100
DuraHost™ Adjustable Mast Options	101
DuraHost™ Portable and Fixed Base Options	102
DuraHost™ Portable Full Armist Pivot and Extension Post	105
MightEyes® Self-Retracting Lifeline	108
ManHandler® Hoist/Winch	109
Tripod Anchorage Connector	109
SelfEscape® ELITE Rescue Descent Device	110
QuickPick™ Rescue Kits	112
Universal Rescue System	113

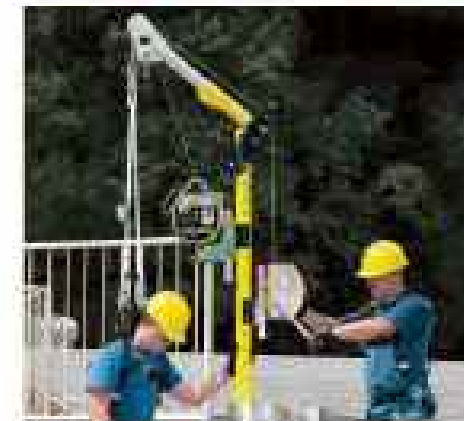

MILLER DESCENT/
RESCUE AND CONFINED SPACE

MILLER DURAHOIST™
Portable Confined Space Systems

COMPLETE FOUR-PIECE HOIST/WINCH SYSTEMS
APPLICATIONS

- Public Utilities:**
Vault and manhole entry, pump/eff/valve stations, water treatment, and wastewater industries
- General Industry (food, chemical, pulp and paper):**
Elevated manholes, storage tanks, platforms/mezzanines, underground vaults, clarifier tanks, pre-heaters
- System breaks down into four lightweight aluminum components for easy storage, transport, and set-up – no tools required for assembly
 - Overall system height adjusts from 79 in. to 100 in.
 - Modular design allows the use of various fixed and portable bases and an optional mast with extensions; multiple winches and/or lifeline systems may be mounted as required



DH-1/ DH-2/ MME-GCB1-03/50FT-DH-19-MLEW/

SKU	Description	Weight
DH-1/	Four-piece system includes B442-27/65FT ManHandler® hoist/winch w/65-ft galvanized steel cable, DH-3 one-piece adjustable mast, DH-4 three-piece portable base, DH-19-MILLER/complete mounting bracket assembly	1115 lb
DH-2/	Four-piece system without ManHandler hoist/winch	91 lb

For portable, retractable MgrtCase® visit [see page 100](#)




Picture displays all three SKUs: DH-1/ DH-2/ MME-GCB1-03/50FT

MILLER DESCENT/
RESCUE AND CONFINED SPACE

ADJUSTABLE MAST OPTIONS
Combining lower mast extensions with the one-piece adjustable mast or the two-piece upper mast eliminates the need for custom-length masts. The upper mast also provides additional solutions to height-restrictive applications.

SKU	Description	Weight
DH-3/	One-piece adjustable mast	29 lb
DH-21/	12-in to 29-in adjustable offset upper mast	23 lb
DH-23	30-in to 48-in adjustable offset upper mast	29 lb
DH-22/21	21-in lower mast extension	14 lb
DH-22/33	33-in lower mast extension	17 lb
DH-22/45	45-in lower mast extension	20 lb
DH-22/57	57-in lower mast extension	23 lb

One-Piece Adjustable Mast

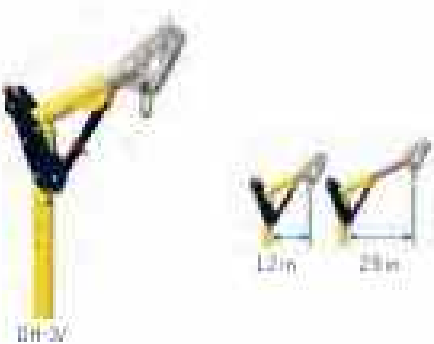

- Compatible with any one lower mast extension
- Overall mast height adjusts from 74 in. to 89 in.
- Mast offset adjusts from 12 in. to 29 in.

Two-Piece Upper Mast



Two-piece upper mast is compatible with any two lower mast extensions, **not exceeding a combined 90 in.** in height for the DH-21/ or 78 in. for the DH-23

Lower Mast Extensions



Extensions provide the flexibility to change overall mast height from 41 in. to 146 in.



MILLER DESCENT/

RESCUE AND CONFINED SPACE

PORTABLE AND FIXED BASE OPTIONS

All of the following bases are compatible with all adjustable mast options. All base options include PVC liner.

THREE-PIECE PORTABLE BASE

Three lightweight aluminum components for easy transport. Features adjustable aluminum screws and a built-in level indicator for easy set-up on uneven surfaces. No tools required for assembly.

SKU	Description
DH-4/	3 piece base compatible with DH-3/ and DH-21 upper mast
DH-24	3 piece base compatible with DH-23/ upper mast

MANHOLE COLLAR

Designed for applications involving frequent set-ups over similarly-sized access openings. Simply slip collar into sewer manhole, tank hatch, or other opening.

SKU	Description
DH-11/19.5	19.5-in Manhole Collar for use with 20-in to 22-in diameter opening
DH-11/21.5	21.5-in Manhole Collar for use with 22-in to 24-in diameter opening
DH-11/23.5	23.5-in Manhole Collar for use with 24-in to 26-in diameter opening
DH-11/25.5	25.5-in Manhole Collar for use with 26-in to 28-in diameter opening
DH-11/27.5	27.5-in Manhole Collar for use with 28-in to 30-in diameter opening

ADJUSTABLE BARREL MOUNT SLEEVE

Designed for shoring, wall and parapet applications where frequent set-up over varying wall thicknesses is required.

SKU	Description
DH-6/	Accommodates wall thicknesses up to a max. of 24 in.

FLOOR MOUNT SLEEVE


Mounts to horizontal concrete or steel structures. **Fasteners not included.**

SKU	Description
DH-12P/	Zinc-plated mild steel
DH-12SS/	Stainless steel

WALL MOUNT SLEEVE

Mounts to vertical concrete or steel structures. Compact design creates minimal intrusion into work space. **Fasteners not included.**

SKU	Description
DH-82P/	Zinc-plated mild steel
DH-82SS/	Stainless steel



MILLER DESCENT/

RESCUE AND CONFINED SPACE

CORE MOUNT SLEEVE

Designed for slip-in installation into a 4-in diameter core hole in concrete or in an existing steel structure.

SKU	Description
DH-92P/	Zinc-plated mild steel
DH-92SS/	Stainless steel

BARREL MOUNT SLEEVE

Eight independent clamping screws allow temporary installations over edges of shoring cans, walls, and other structures.

SKU	Description
DH-5/	Accommodates wall thicknesses from 0.5 in. up to a maximum of 3.5 in.

FLUSH FLOOR MOUNT SLEEVE

Eliminates the potential trip hazard presented by other floor mount sleeves. Installs into a 4-in diameter core hole in concrete or in an existing steel structure. **Fasteners not included.**

SKU	Description
DH-202P/	Zinc-plated mild steel
DH-20SS/	Stainless steel
DH-10SS/	Stainless steel sleeve cap for mount sleeve
DH-102P/	Zinc-plated sleeve cap for mount sleeve

VEHICLE HITCH MOUNT SLEEVE

Designed to install into a 2-in receiver on an attendant vehicle to provide a portable anchor point for confined space entry/retrieval, rescue, and fall arrest applications.

SKU	Description
DH-12/	Vehicle hitch base kit for use with DH-3/ and DH-21 upper mast
DH-25	Vehicle hitch base kit for use with DH-23/ upper mast
DH-13/	Sleeve extension 3 ft.
DH-13/4FT	Sleeve extension 4 ft.
DH-14/	Multi-directional bumper receiver
DH-15/	Point hitch adapter
DH-16/	Ball hitch adapter 2 in.
DH-17/	Single direction bumper receiver



DH-12/



DH-14/



DH-13/



DH-15/



DH-17/

MILLER DESCENT/
RESCUE AND CONFINED SPACE

ACCESSORIES

SKU	Description	Weight
DH-18/	Equipment cart for DuraHoist Four-Phase Hoist System (DH-1/ DH-2/)	40 lb
DH-4WK/	Wheel Kit (two wheels) for the DuraHoist Three-Phase Base (DH-4/)	30 lb

HOISTS/WINCHES AND MOUNTING BRACKETS FOR DURAHOIST SERIES

The Complete Mounting Bracket Assembly (DH-19-MILLER/) is required to mount a Miller ManHandler Hoist/Winch or a Miller MightEvac SRL to the DuraHoist Portable Confined Space System.

SKU	Description
DH-19-MILLER/	Complete mounting bracket assembly required to mount MightEvac and ManHandler Winch to latest dual DH-3/ DH-3S/ & DH-23/
DH-19/	Winch mount bracket
DH-AB-MILLER/	Adapter bracket for Miller MightEvac SRL (Requires a DH-19/ Bracket)

10%



MILLER DESCENT/
RESCUE AND CONFINED SPACE

**MILLER DURAHOIST
 Portable Fall Arrest Post and Extension Post**

Provides three independent swivel tie-off points for fall arrest anchorage (three worker maximum in any configuration).

APPLICATIONS

Electrical transformers, leading edge deck work, confined space and rescue, industrial presses, bridge cranes, large cranes, and limited horizontal lifeline applications.

- Three-stage/four-position telescoping design and aluminum construction for easy transportation and set-up
- Leveling screws allow the system to be plumbed to vertical on inclines up to 15 degrees
- Portable and fixed bases allow for versatile usage

SKU	Description	Weight
DH-AP-1/	Portable fall arrest post	38 lb
DH-AP-2/	14-in extension post	4.5 lb



Telescoping design allows unit to be adjusted in three stages from 32.75' (10.5725 m)

**MILLER DURAHOIST
 Rescue/Material Handling Davit Arm**

- Designed for rescue and material handling applications
- Quick-attach design assembles easily
- Lightweight aluminum construction makes davit arm easy to transport and set up


SKU	Description	Weight
DH-AP-3/	Rescue/Material Handling davit arm	29.5 lb



Picture displays all three SKUs: DH-AP-1/ + DH-AP-1/ + DH-AP-3/ + DH-AP-3/ + DH-AP-11/ + 8442-27/65FT



Picture displays all three SKUs: DH-AP-1/ + DH-AP-2/ + DH-AP-3/ + DH-AP-11/ + 8442-27/65FT

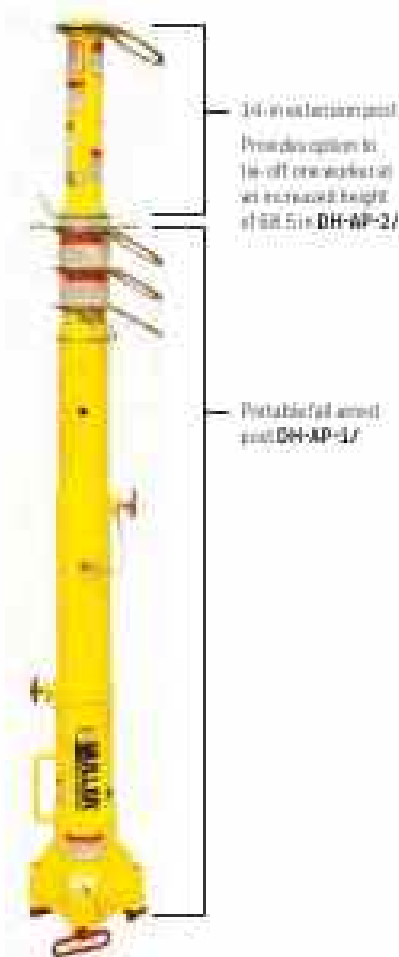

14-in extension post. Provides option to tie-off one worker at an increased height of 32.5' + DH-AP-2/

Portable fall arrest post DH-AP-1/



Picture displays all three SKUs: DH-AP-1/ + DH-AP-2/ + DH-AP-3/


10%

MILLER DESCENT/
RESCUE AND CONFINED SPACE

MILLER TECHLINE™ SYSTEM
Temporary Horizontal Lifeline (HLL) System Kits

Miller HLL Kits offer continuous fall protection for the length of the lifeline when used in conjunction with the Miller DuraHoist Fall Arrest Post (post sold separately DH-AP-1/). Ideal for applications where an overhead anchorage does not exist.

SKU	Lifeline Material	Maximum Span	No. of O-rings	No. of Workers
HLLR2-L/30FT	Static kernmantle rope	30 ft	2	2 workers
HLLR2-L/60FT	Static kernmantle rope	60 ft	2	2 workers
SGLLK/30FT	Galvanized cable	30 ft	0	2 workers
SGLLK/60FT	Galvanized cable	60 ft	0	2 workers

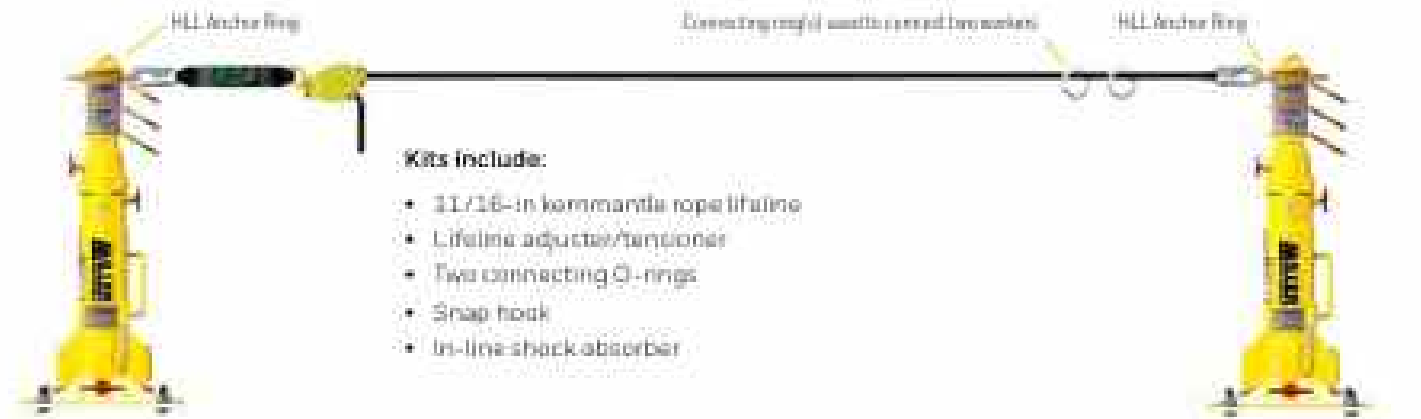

MILLER DURAHOIST
Anchor Base and Anchor Plates

SKU	Description
Portable I-beam Anchor Base	
DH-AP-9/	Attaches to steel I-beams, between 6-in to 14-in wide. Flange thickness 5/16 in to 1 in.
Weld-on Anchor Plate	
DH-AP-12/	For use in concrete or steel applications (portable or permanent)



DH-AP-9/



DH-AP-12/

MILLER DESCENT/
RESCUE AND CONFINED SPACE

FIXED WELD-ON ANCHOR PLATE

Designed to be permanently welded to existing structures in locations of frequent work, or where the use of a portable base is impractical.


Plates for inclined surfaces (DH-AP-6/; DH-AP-7/) can be customized to your specific incline requirements up to a maximum of 45 degrees.

SKU	Description
DH-AP-4/	Plate with off anchor
DH-AP-5/	Standard plate
DH-AP-6/	Plate for inclined surfaces with off anchor
DH-AP-7/	Plate for inclined surfaces



DH-AP-4/

DH-AP-5/

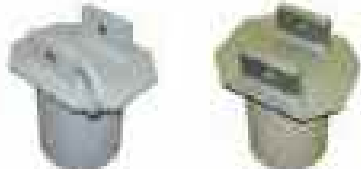

DH-AP-6/

DH-AP-7/

MILLER HOISTS/WINCHES AND BRACKETS FOR DH-AP SERIES

SKU	Description
DH-AP-11/	Complete assembly of adapter plate (DH-AP-10/) and bracket (DH-AB-MILLER/) for mounting MaxHoist® Hoist/Winch or MightEasi® SR.
DH-AB-DB1/30	Adapter bracket for DB1 winch 30 degrees
DH-AB-DB1/	Adapter bracket for DB1 winch
DH-AP-8/	Flat quick mount bracket
DH-AP-10/	Adapter plate for mounting DH-AB-Miller to DH-AP-3/



DH-AB-DB1/



DH-AP-11/



DH-AP-10/

DH-AP-8/



MILLER DESCENT/
RESCUE AND CONFINED SPACE

MIGHTEVAC® SRD WITH EMERGENCY RETRIEVAL HOIST

The Miller MightEvac® SRL combines the superior performance and reliability of the popular MightyLite™ SRL Series with a quick-activating retrieval mechanism for emergency evacuation. This innovative solution provides both safety and efficiency, making it an essential tool for emergency situations.

Features and Benefits:

- Promotes quick and easy rescue with a 4:1 mechanical advantage (average speed of 25 ft per minute)
- Increased weight rating as per OSHA to 420 lb and rated ANSI 310 lb
- Meets OSHA 1926.502/1910.140 and certified ANSI Z359.14-2021 Class 1
- For emergency evacuation only
- Corrosion-resistant stainless steel & aluminum components
- Convenient, heavy-duty carrying handle



SKU	Description
Lifetime Galvanized Steel	
MME-OGC1-02/50FT	MightEvac 50 ft without tripod bracket and pulley
MME-OCB1-02/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner
MME-GKT1-02/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner / tripod 7 ft
MME-GCK1-02/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner / tripod 9 ft
MME-GKM1-02/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner / tripod 7 ft / 65-ft ManHandler
MME-OGC1-02/100FT	MightEvac 100 ft without tripod bracket and pulley
MME-OCB1-02/100FT	MightEvac 100 ft with tripod bracket, pulley & carabiner
MME-GKT1-02/100FT	MightEvac 100 ft with tripod bracket, pulley & carabiner / tripod 7 ft
MME-GKM1-02/100FT	MightEvac 100 ft with tripod bracket, pulley & carabiner / tripod 7 ft / 100-ft ManHandler
MME-OGC1-02/130FT	MightEvac 130 ft without tripod bracket and pulley
MME-OCB1-02/130FT	MightEvac 130 ft with tripod bracket, pulley & carabiner
MME-GKT1-02/130FT	MightEvac 130 ft with tripod bracket, pulley & carabiner / tripod 7 ft
Lifetime Stainless Steel	
MME-OSS1-01/50FT	MightEvac 50 ft without tripod bracket and pulley
MME-SCB1-01/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner
MME-SKT1-01/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner / tripod 7 ft
MME-SKN1-01/50FT	MightEvac 50 ft with tripod bracket, pulley & carabiner / tripod 7 ft / pulley / 60-ft SS ManHandler
MME-OSS1-01/100FT	MightEvac 100 ft without tripod bracket and pulley
MME-SCB1-01/100FT	MightEvac 100 ft with tripod bracket, pulley & carabiner
MME-OSS1-01/130FT	MightEvac 130 ft without tripod bracket and pulley
MME-SCB1-01/130FT	MightEvac 130 ft with tripod bracket, pulley & carabiner
Lifetime Reinforced Webbing - Tearaway Edge	
MME-OHX1-02/40FT	MightEvac 40 ft without tripod bracket and pulley
MME-KLB1-02/40FT	MightEvac 40 ft with tripod bracket, pulley & carabiner
MME-KXT1-02/40FT	MightEvac 40 ft with tripod bracket, pulley & carabiner / tripod 7 ft
MME-KXX1-02/40FT	MightEvac 40 ft with tripod bracket, pulley & carabiner / tripod 9 ft
MME-OHX1-02/85FT	MightEvac 85 ft without tripod bracket and pulley
MME-KLB1-02/85FT	MightEvac 85 ft with tripod bracket, pulley & carabiner

Technique is a registered trademark of Tag in Action LLC

MILLER DESCENT/
RESCUE AND CONFINED SPACE

MILLER MANHANDLER

Hoist/Winch

The Miller ManHandler Hoist/Winch is the perfect solution for a range of applications including confined space entry, rescue, positioning, and personnel/material handling.

A secondary fall arrest system is recommended for fall protection.

- Compact, durable steel construction and smooth, controlled winding action
- Effortless lifting and lowering with 5:1 gear ratio
- Anti-backlash crank handle braking system prevents free-wheeling
- Built-in mounting bracket and 350 lb working capacity

SKU	Description
Lifetime Galvanized Steel	
8442-ZT/65FT	ManHandler Winch 65 ft with integrated tripod bracket, pulley & carabiner
8442-ZT/100FT	ManHandler Winch 100 ft with integrated tripod bracket, pulley & carabiner
84426C-ZT/65FT	ManHandler Winch 65 ft with integrated tripod bracket, pulley & carabiner / tripod 7 ft
84426X-ZT/65FT	ManHandler Winch 65 ft with integrated tripod bracket, pulley & carabiner / tripod 9 ft
Lifetime Stainless Steel	
8442SS-ZT/65FT	ManHandler Winch 65 ft with integrated tripod bracket, pulley & carabiner
8442SS-ZT/100FT	ManHandler Winch 100 ft with integrated tripod bracket, pulley & carabiner
SKU	
Description	
Lifetime Galvanized Steel	
8440-ZT/60FTBR	Material Winch 60 ft with integrated tripod bracket, pulley & carabiner
8441-ZT/88FT	Material Winch 88 ft with integrated tripod bracket, pulley & carabiner
Lifetime Stainless Steel	
8440-SS-ZT/	Material Winch 60 ft with integrated tripod bracket, pulley & carabiner

MILLER TRIPOD

The versatile, lightweight Miller Tripod is designed for typical confined space and rescue applications.

- High-strength aluminum construction
- Withstands up to 5,000 lb of vertical pull
- Adjustable legs with integral push pins, locking feature holds legs securely in place
- Safety chain and tripod feet with rubber skid pads and serrated edge prevent slippage in icy conditions

SKU	Description
51/7FT	7-ft high strength aluminum tripod
51X/9FT	9-ft high strength aluminum tripod
SKU	
Description	
8836/	Wall mounted bracket
9054EW	MightEvac bracket for 50 ft units
9066EW	MightEvac bracket for 100 & 130 ft units
6780080/1	Mounted bracket kit hardware
9025/	Push pin with key ring



Miller Tripod

MILLER DESCENT/


RESCUE AND CONFINED SPACE

MILLER SAFESCAPE™ ELITE

Rescue/Descent Device (RDD)

The Miller SafeScape ELITE RDD is the next-generation global solution for rescue/descent that meets all applicable safety standards throughout the world, lowers cost of ownership, enhances safety, and is easy to use.

- Meets all applicable safety standards globally
- No annual factory recertification
- User-rated for up to two (2) workers
- Approved for multiple descents
- Bi-directional design
- Up to 1,640 ft lifeline descent capacity
- Lightweight and compact design
- Optional hoisting wheel and/or ladder bracket available
- Convenient kit options available

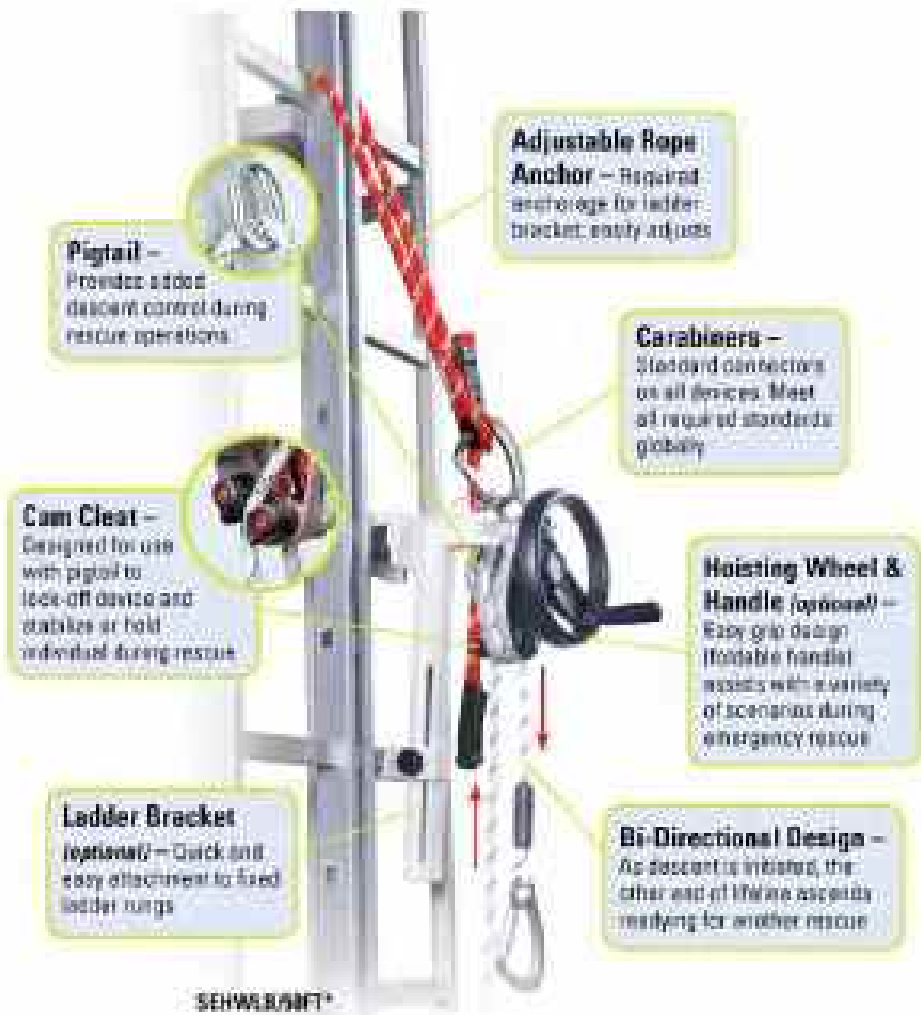

MILLER DESCENT/

RESCUE AND CONFINED SPACE

BASIC MODELS

SKU	Description
SE/50FT	Miller SafeScape ELITE RDD – Also includes anchor slings & rescue bag
SE/75FT	Miller SafeScape ELITE RDD – Also includes anchor slings & rescue bag
SE/100FT	Miller SafeScape ELITE RDD – Also includes anchor slings & rescue bag
SE/150FT	Miller SafeScape ELITE RDD – Also includes anchor slings & rescue bag
SECKT/50FT	Miller SafeScape ELITE one rescue
SECKT/300FT	Miller SafeScape ELITE one rescue

BASIC MODEL WITH HOISTING WHEEL

SKU	Description
SEHW/75FT	Miller SafeScape ELITE RDD w/hoisting wheel – also includes anchor slings & rescue bag
SEHW/100FT	Miller SafeScape ELITE RDD w/hoisting wheel – also includes anchor slings & rescue bag
SEHW/150FT	Miller SafeScape ELITE RDD w/hoisting wheel – also includes anchor slings & rescue bag
SEHW/300FT	Miller SafeScape ELITE RDD w/hoisting wheel – also includes anchor slings & rescue bag

BASIC MODEL WITH HOISTING WHEEL AND LADDER BRACKET

SKU	Description
SEHWLB/75FT	Miller SafeScape ELITE RDD w/hoisting wheel & ladder bracket – also includes anchor slings, adjustable rope anchor & rescue bag
SEHWLB/100FT	Miller SafeScape ELITE RDD w/hoisting wheel & ladder bracket – also includes anchor slings, adjustable rope anchor & rescue bag
SEHWLB/300FT	Miller SafeScape ELITE RDD w/hoisting wheel & ladder bracket – also includes anchor slings, adjustable rope anchor & rescue bag

WIND ENERGY KIT

SKU	Description
SEWPKT/75FT	Kit includes Miller SafeScape ELITE RDD with hoisting wheel and ladder bracket, T-bar, edge protector, 3 anchor slings, 3 carabiners, pulley, adjustable rope anchor, rescue rope grab, accessory bag and kit bag

ACCESSORIES

SKU	Description
SE-LB/	Ladder bracket & adaptor
SE-AS/4.0FT	Anchor sling, 4 ft
SE-AS/2.0FT	Anchor sling, 2-1/2 ft
SE-ARA/	Adjustable rope anchor
SE-RG/	Rescue rope grab
SE-EP/	Edge protector
SE-TB/	T-bar
SE-P/	Pulley, aluminum
SE-BAG/M	Wind energy kit rescue bag fits 50 ft to 200 ft lifeline
SE-BAG/L	Wind energy kit rescue bag fits 200 ft lifeline
17D-1/	Galvanized steel carabiner
8185/6FTGN	Looped cross-arm strap anchor connector



MILLER DESCENT/

RESCUE AND CONFINED SPACE

MILLER QUICKPICK™ RESCUE KITS

Miller QuickPick Rescue Kits deliver peace of mind during unexpected, stressful peer-rescue situations. The rescuer can remotely attach the system to the suspended worker while remaining securely anchored on the walking/working surface. All rescue components are contained in one easy-to-store kit with no assembly necessary — only requiring an overhead anchorage.

- Out-of-the-bag solution for prompt rescue
- Quickly raise or lower a fallen worker to safety
- Simplified rescue systems

PREMIUM QUICKPICK RESCUE KITS

- Best choice for users whose job does not normally include rescue
- Includes a backup braking system to prevent uncontrolled descent
- Highly efficient hauling system with a 5:1 lifting ratio, making heavier loads easier to lift
- Complies with OSHA and ANSI Z359.4-2013 for assisted rescue and self-rescue systems
- Complies with OSHA and rated for up to a 400 lb user

STANDARD QUICKPICK RESCUE KITS

- Designed for users more experienced with rescue
- Provides an economical lift configuration for conducting rescue with workers who are confident in managing rescue systems
- Efficient hauling system with a 4:1 lifting ratio, making heavier loads easier to lift
- Complies with OSHA and ANSI Z359.4-2013 for assisted rescue and self-rescue systems
- Complies with OSHA and rated for up to a 310 lb user

Premium Kits - Includes backup braking system, pulleys, rope, rescue pole with clip, pigtail rope control handle, carabiners, and cross-arm anchorage connector, Miller WebBandit™ tool lanyard, kit bag, and pole bag.

SKU	New Product Name
QP/25FT	25-ft working length system
QP/50FT	50-ft working length system
QP/75FT	75-ft working length system
QP/100FT	100-ft working length system

Standard Kits - Includes pulleys, rope, rescue pole with clip, pigtail rope control handle, carabiners, and cross-arm anchorage connector, Miller WebBandit tool lanyard, kit bag, and pole bag.

SKU	New Product Name
QP-L/25FT	25-ft working length system
QP-L/50FT	50-ft working length system
QP-L/100FT	100-ft working length system

Components

SKU	New Product Name
QP-EP	12-ft rescue pole with carabiner clip, carabiner, pigtail, Miller WebBandit tool lanyard and bag
QP-SC	Replacement carabiner clip
QP-RHA	Rope control handle
17D-1	Carabiner
8185/6FTGN	Looped cross-arm strap anchorage connector



MILLER DESCENT/

RESCUE AND CONFINED SPACE

MILLER UNIVERSAL RESCUE SYSTEM

The Miller Universal Rescue System (Series 70) is a lightweight, compact, versatile access and retrieval rope system. Simple, one-person operation, the rope control handle allows the user to easily ascend and descend the rope line.

- Aluminum head assembly with roller pulley
- Kernmantle rope with a tensile strength of 5,600 lb and high-temperature resistance to 360° F
- Rope control handle with friction locking device and permanently attached Maryland shock-absorbing lanyard
- Convenient carrying bag and two (2) carabiners
- ANSI Z359.4-2013

SKU	Description
70-100/100FT	Series 70 System with 25-ft working length
70-200/200FT	Series 70 System with 50-ft working length
70-C/	Rope control handle with attached Miller lanyard
6004NS/YL	Woven chair
17D-1/	Carabiner
8185/6FTGN	Looped cross-arm strap anchorage connector



Optional Woven Chair
6004NS/YL

MILLER MANUAL DESCENT DEVICE

The Miller Manual Descent Device is designed for a variety of applications where smooth, controlled descent from an elevated position is required. The device, controlled by the user, allows for making descent fast or slow, decelerating and stopping by applying slight outward pressure on the free end of the line and locking in a stationary position for a hands-free work environment.


SKU	Description
8113/*	Descent device unit
8195/75FTWH	75-ft polyester braided descent rope
8195/100FTWH	100-ft polyester braided descent rope
8195/150FTWH	150-ft polyester braided descent rope

MILLER RESCUE LADDER

The Miller Rescue Ladder is a portable nylon web ladder designed and intended to assist with self-rescue for applications such as aerial lifts, bucket trucks, and elevated work surfaces. In the event of a fall, the user releases the ladder by pulling on the drawstring and then climbs back to the work surface.

SKU	Description
9058/15FTBK	Portable 15-ft nylon web ladder
9058/25FTBK	Portable 25-ft nylon web ladder
9058/30FTBK	Portable 30-ft nylon web ladder

*8113/1 Descent Device Unit multi-bag ordered with 8195/ polyester braided rope

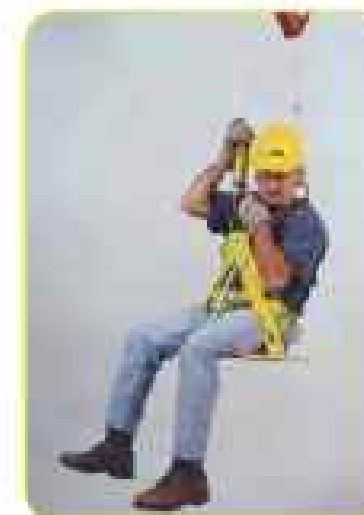

Optional Woven Chair 6004NS/YL



9058/15FTBK



Engineered Solutions

E	Xynor® Horizontal Lifeline	117
	Miller ShockFusion®	117
	Free Standing Guardrail Systems	118
	Free Standing Hatch Guard Systems	118
	Single Truss Rail System	120
	Two Truss Rail System	120
	Multi-Column Truss Rail Systems	120
	Modular Crossover Stair Systems	121
	Self-Closing Gates	121



ENGINEERED SOLUTIONS

MILLER ENGINEERED SOLUTIONS

Since 1985, Miller Engineered Solutions has been dedicated to the design, material sourcing and installation of custom-engineered fall protection systems. Our network of installer partners and qualified in-house personnel can perform the work you need – from design and engineering, to final field commissioning – all in accordance with federal and local codes and regulations.

Our experienced team can provide whatever your project requires – from comprehensive, turn-key services, to specifications, design, or installation assistance. We provide you with solutions based on your specific site conditions, work process, and budget.

The result is a safer environment that enables you to:

- Reduce risks
- Maintain or lower insurance premiums
- Control worker compensation claims
- Comply with regulations

OUR SERVICES

SITE SURVEY FALL HAZARD ASSESSMENT

Miller Engineered Solutions uses a consultative approach to identify the safety hazards associated with fall exposures.

DESIGN

We offer complete engineering, drafting, and design services, working in concert with your team to ensure all your needs and requirements are met.

SUPPLY OF SYSTEM COMPONENTS

We supply all system components, PPE, and custom fabrications, designed specifically for system attachment to existing or designed structures.

Contact the Miller Engineered Solutions team for assistance with engineered systems at MESservices@PIPGlobal.com



ENGINEERED SOLUTIONS

HORIZONTAL LIFELINE (HLL) SYSTEMS

XENON

HORIZONTAL LIFELINE

Whether it's along a rooftop, inside an arena, or high atop a suspension bridge, the Xenon Permanent Horizontal Lifeline System provides fall protection for a variety of configurations: straight or curved system. A uniquely-designed shuttle connector bypasses intermediate supports without disconnecting from the lifeline, increasing mobility and promoting worker safety.

Because of its versatility, simplicity, and minimal maintenance, a Xenon System is the perfect solution for engineers, architects, and contractors to provide secure safety access on new buildings, industrial sites, railcars, pipe racks, arenas, bridges, etc.

- **Easy installation** – either in-house maintenance personnel under the supervision of an installation technician, or by a certified Xenon installer
- Stainless steel components withstand harsh environments



MILLER SHOCKFUSION

The Miller ShockFusion Horizontal Lifeline (HLL) System minimizes deflection in the lifeline while effectively managing system forces to maintain a safe connection to a variety of roof structures.

The unique surface-mounted design eliminates the need to attach to roof framing structure, making installation quick and easy while reducing labor costs.

For ShockFusion Horizontal Lifeline Custom Engineered Systems requiring corners, installation, and engineering, contact Miller Engineered Solutions.



ENGINEERED SOLUTIONS

HORIZONTAL LIFELINE (HLL) SYSTEMS

- **Significantly reduces system forces on the roof** - In the event of a fall, the energy-absorbing, load distribution design ensures a secure connection to the roof while protecting the underlying structure.
- **Protects multiple workers while providing maximum mobility** - The continuous pass-through design provides safe access to roof areas or multiple workers per system.
- **Durable design withstands the changing outdoor environment** - Internal components are constructed of stainless steel for greater corrosion-resistance and extended service life. The base plate is zinc-plated and premium powder coated for increased durability.

ADAPTS TO A VARIETY OF ROOF STRUCTURES



Standing Seam

- Aluminum clamping mechanism is designed to pre-install to the base plate and is self-centering for easy installation.
- The clamping bolts are tightened from above the plate for easy fastening and inspection.
- Three models are available to accommodate standing seam.



Metal Sheathing

- Designed to attach to metal sheathing with a minimum 24-gauge (0.024 in.) thickness.
- Hardware kit includes sealing materials to prevent water damage to roof.



Membrane/Built-up

- Easy-to-install toggle kit fastens through membrane, insulation, and into metal sheathing, wood sheathing, or concrete.
- Models available for built-up roof thicknesses accommodate up to 10-1/2 in.



Wood

- Includes lag screw kit.
- Installs into plywood with minimum thickness of 5/8-in CDX.



Concrete Decking

- Includes concrete expansion anchor kit.
- Installs into concrete decking with minimum thickness of 1-1/2 in and minimum concrete compressive strength of 3000 PSI.

ENGINEERED SOLUTIONS

GUARDRAIL SAFETY SYSTEMS

FREE STANDING GUARDRAIL SYSTEMS

Fall protection that protects your investment while complying with OSHA regulations. Weighted guardrail systems do not require drilling into roofs or floors – allowing for quick and easy installation or reconfiguration. A positive locking system secures the rails to the base. Toe board adapters and base-mover cart (dolly) are available. Made in America.

Designed for both temporary and permanent use.

Railing Types Available

- Factory welded, modular rails
- Non-welded, pipe and fittings assembly


APPLICATIONS

- Fall protection
- Roof access points
- Skylight protection
- Outside docks/platforms
- Conveyor protection
- Barricading and pedestrian walkways

FREE STANDING HATCH-GUARD SYSTEMS

Fall protection that mitigates risk and promotes ease of access to rooftops, while complying with OSHA regulations. Hatch-guards do not require drilling into the hatch curb or flashing – allowing for quick and sturdy installation. Grab handles, self-closing gate, and roof landing zone are standard features. Available in powder-coated safety yellow or hot-dipped galvanized finish. Made in America.

Standard sizes available for both stair and ladder accessed hatches.

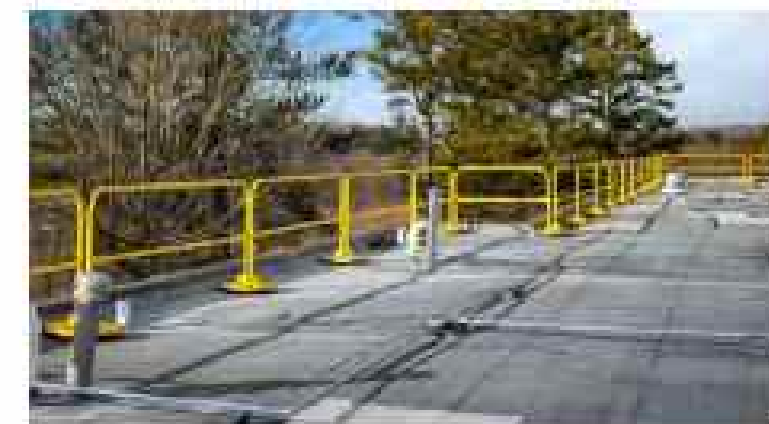

Free Standing Guardrail System



Free Standing Guardrail System



Free Standing Hatch-Guard System

ENGINEERED SOLUTIONS

RIGID RAIL SYSTEMS

The safest solution for virtually every environment. Featuring an open track design, exclusively engineered for easy movement, Truss Rail Systems provide the highest degree of mobility and safety, while reducing the risk of injury in elevated work environments. Available in various configurations and support center distances, these systems make fall protection easily customizable and cost-effective. Made in America.

APPLICATIONS

- Rail yards
- Industrial sites
- Mines and quarries
- Barges and marine sites
- Aviation hangars
- Vehicles and machinery

SINGLE TRUSS RAIL SYSTEM

This system provides fall protection coverage while working on top of vehicles or elevated machinery. The single foundation design is ideal in areas where space for a foundation is limited. Standard reach distance of 14 ft and system height of 27 ft, supporting two workers at a time. Truss rail includes dual track for multi-user bypass capabilities.

Note: This system includes a rebar cage assembly for the standard foundation.

TWIN TRUSS RAIL SYSTEM

This system provides twin truss rail fall protection coverage for those working side-by-side on top of vehicles or elevated machinery. The single foundation and twin truss rail design make this system ideal for multiple railroad track and truck applications. Standard reach distance of 14 ft and system height of 27 ft, supporting four workers at a time. Truss rail includes dual track for multi-user bypass capabilities.

Note: This system includes a rebar cage assembly for the standard foundation.

MULTI-COLUMN TRUSS RAIL SYSTEMS

This system is modular and expandable to infinite lengths and heights. The foundation design and quantity of support columns is dependent upon the overall system length. The system is ideal for railroad applications. Truss rail includes dual track for multi-user bypass capabilities.

Note: This system includes a rebar cage assembly for the standard foundation.



Single Truss Rail System



Twin Truss Rail System



Multi-Column Truss Rail System

ENGINEERED SOLUTIONS

GUARDRAIL SAFETY SYSTEMS

MODULAR CROSSOVER STAIR SYSTEMS

Modular crossover stair system allows workers to safely navigate over obstacles, roof elevation changes, or access elevated work environments. The system is designed for broad configurability, to solve the many needs of walking/working surfaces standards and requirements – while complying with OSHA regulations. Made in America.

Designed for freestanding or mechanically attached installation options.

APPLICATIONS

- Fall protection
- Rooftops - commercial, manufacturing, retail
- Industrial sites
- Wastewater treatment plants
- Conveyor/fulfillment distribution centers
- Elevated work access

SELF-CLOSING GATES

Self-closing gates add an additional level of safety. For interior or exterior applications, self-closing gates are an OSHA-compliant solution for securing walking/working surfaces and creating a controlled entry and exit point for work areas or ladders. Available in powder-coated safety yellow or hot-dipped galvanized finish. Made in America.

All gates have adjustable widths and can be mounted to round posts, square posts, flat ladder stringers, doorways and walls.



Modular Crossover Stair System



Self-Closing Gates

Contact the Miller Engineered Solutions team for assistance with engineered systems at MESservices@PIPGlobal.com



Training Solutions



Comprehensive Training Solutions	123
Virtual Instructor-Led Training	124
Online, On-Demand Training	125
In-Person Classroom Training	126
On-Site Training	127
Fall Protection Training Benefits	128
Fall Protection Site Assessments	129
Fall Protection Equipment Inspection	129

TRAINING SOLUTIONS

WORLD LEADERS

A WORLD LEADER IN CREATING COMPREHENSIVE APPROACHES FOR SAFETY TRAINING SOLUTIONS


As a recognized leader in worker safety training, Miller offers comprehensive behavior-based safety training, taught by certified, knowledgeable industry experts.

DISCOVER WHAT IS BEST FOR YOUR EMPLOYEES, COMPANY OR SITE NEEDS

Choose from a vast selection of courses taught in various formats including in-person, virtual, or online.

TRAINING OPTIONS TO MEET YOUR SPECIFIC NEEDS

- Learn to comply with regulatory compliances such as OSHA, ANSI, and CSA
- On-site programs, online resources and hands-on experience
- State-of-the-art training facility in Pasadena, TX

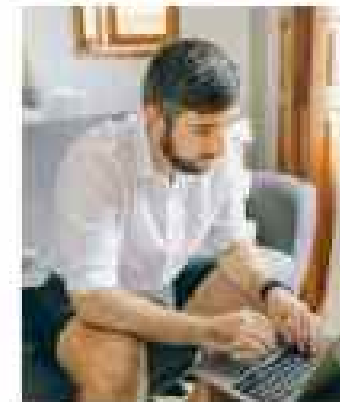


Online training on-demand at your pace



Virtual "live" instructor led



On-site at your location

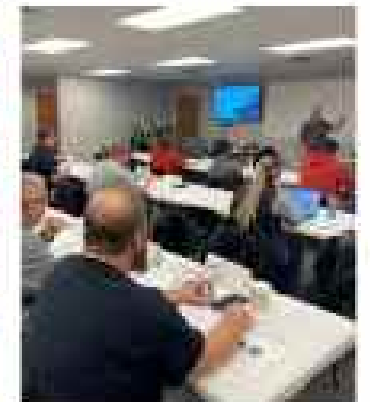

Classroom instructor led



Customized courses to meet your company's needs



Train-the-trainer courses for experienced end-users



Fall protection inspection service solutions



Confined space entry, rescue and train-the-trainer

TRAINING SOLUTIONS

VIRTUAL INSTRUCTOR-LED TRAINING



VIRTUAL TRAINING COURSES TAKE PLACE WITH A LIVE MILLER INSTRUCTOR THROUGH AN ONLINE PLATFORM VIA VIDEO CONFERENCE

A direct link to the virtual room is sent after registration. Miller virtual classes have limited seats to keep the personal interaction between students and the instructor. Private sessions are also available for a per person quote.

VIRTUAL BENEFITS

[SHOP NOW](#)



TRAINING SOLUTIONS

ONLINE, ON-DEMAND TRAINING



GAIN COMPLIANCE IN THE COMFORT OF YOUR HOME

Online training courses are offered 24-7 and allow you to train at your own pace. A direct link is sent separately after registration. Courses are taken in our Learning Management System (LMS), where your profile is automatically generated.

[SHOP NOW](#)



COURSES OFFERED

- 24-Hr. Qualified Trainer (formerly Train the Trainer)
- Fall Protection Competent Person
- EM385 Competent Person Refresher
- Fall Protection Equipment Inspection
- Competent Person & Equipment Inspection Combo
- Fall Protection Train the Trainer Refresher
- Mechanical Repair & Refresher
- Fall Protection Qualified Person*
- Fall Protection Qualified Inspector*
- Fall Protection Train the Trainer*

*Canadian Course

We continually update and add to our offering. Check our website for the most up-to-date course listing.



Check out our AR Technology Simulators



COURSES OFFERED

- Fall Protection Awareness/User
- Basic Fall Protection Orientation (ABCs of Fall Protection)
- EM385 Fall Protection Competent Person Refresher
- Fall Protection Competent Person Refresher
- Fall Protection Competent Person Refresher for the U.S. Military
- Introduction to Confined Space & Confined Space Rescue
- Ladder Safety Awareness
- Various Product-Specific Fundamentals
- Qualified Person Refresher*

*Canadian Course

We continually update and add to our offering. Check our website for the most up-to-date course listing.



TRAINING SOLUTIONS

IN-PERSON CLASSROOM TRAINING



CHOOSE FROM A VARIETY OF IN-PERSON COURSES TO MEET YOUR INDIVIDUAL AND GROUP TRAINING REQUIREMENTS

In-person training courses include a variety of dates and locations to choose from, and are offered throughout the U.S. From multi-day training to one-day refresher courses, we have your safety training requirements covered. All training courses are led by our team of experienced and knowledgeable instructors. When applicable, industry simulators are used for hands-on experience.

[SHOP NOW](#)



TRAINING SOLUTIONS

ON-SITE TRAINING

DISCOVER THE BEST ON-SITE TRAINING SOLUTION FOR YOUR EMPLOYEES

Customized training sessions can be scheduled at your facility, or at one of our Miller Training Centers. Miller Training provides all equipment and materials necessary to conduct the training. Our experienced instructors are trained subject matter experts educated on all regulatory compliances and ready to go the extra mile.

[REQUEST A QUOTE](#)



IN-PERSON COURSES

Fall Protection

- Competent Person
- Competent Person Refresher
- Fall Protection Equipment Inspection
- EM385-1 for USACE & Contractors
- EM385-1 for USACE & Contractors Refresher
- Competent Person for the U.S. Military
- Train the Trainer Refresher

Tower & Rescue

- Authorized Tower Climber and Rescue
- Competent Tower Climber and Rescue

Confined Space

- Confined Space Entry
- Confined Space Rescue
- Confined Space Train-the-Trainer
- Various Confined Space Refresher Courses

Wind Energy

- Wind Energy Basic Height Safety
- Wind Energy Competent Climber



TYPES OF ON-SITE TRAINING

- Customized to meet your exact needs
- Competent Person (or Refresher)
- 24-hr EM385-1 Competent Person (or Refresher)
- Fall Protection Equipment Inspection Service
- Awareness/User
- Awareness/User with Hands-On Application
- Awareness/User with First Aid & CPR
- Aerial Lift
- Tower Climber & Rescue
- Wind Energy
- Confined Space Entry, Rescue, Train-the-Trainer
- OSHA 10, OSHA 30, or Residential
- Private Virtual Session
- Product Training with Hands-On Application

IF YOU DON'T SEE A COURSE HERE THAT FITS YOUR APPLICATION, REQUEST A QUOTE AND WE'LL DEVELOP ONE THAT DOES.



TRAINING SOLUTIONS

FALL PROTECTION TRAINING BENEFITS



VIRTUAL TRAINING BENEFITS

- Live instructor led training via video conference
- Train in the convenience of your home or in a safe conference space
- Save on travel and other expenses
- Course time-zone choices based off your location
- Various US and Canadian course selection
- Downloadable certificates immediately available following successful completion of class



ONLINE TRAINING BENEFITS

- Save on travel and other expenses
- Learn at your own pace
- Train in the convenience of your home or in a safe conference space
- Available 24-7
- Pause and pick up where you left off or take the training in one sitting
- Downloadable certificates (when applicable) are immediately available following successful completion of course



ON-SITE TRAINING BENEFITS

- Customized courses to meet your company or site needs
- Designed to fit your schedule
- Held at your location (no travel, keeping employees on-site)
- Option to hold custom or site specific courses at a Miller location
- Ability to provide on-site safety assessments
- Private class that is closed to the public
- Equipment inspection services available



IN-PERSON / CLASSROOM TRAINING BENEFITS

- Select from a variety of safety courses located throughout the US
- Mind share with other students from various backgrounds and industries
- Free parking, close hotel accommodation, and catered lunch (parking & hotels vary by location, all classes include catered lunch)
- 10,000 square foot air conditioned training gym with industry specific safety simulators (Pasadena, TX)
- Hands-on, instructor led

[BOOK ONLINE](#)

TRAINING SOLUTIONS

FALL PROTECTION

FALL PROTECTION SITE ASSESSMENTS

In addition to customized training, we offer Fall Protection Site Assessments, also called Hazard Assessments. These are essential to worksite safety. Site Assessments proactively identify fall hazards, and ensures that workers can confidently perform their tasks, knowing that their safety is a top priority.

Our instructors complete a full site walk-through, identifying any existing or potential fall hazards, followed by a written plan of action including photo documentation.

[REQUEST A QUOTE](#)



FALL PROTECTION EQUIPMENT INSPECTION

Additionally, when you partner with us for your annual equipment inspections, we give you the peace of mind that you are meeting and exceeding compliance, reducing costs, increasing worker safety, and saving valuable time for your safety manager and employees.

We can conduct this service on-site at your location, or you can send an employee to one of our trainings to perform the inspections. We also offer combo savings when you do both.

[LEARN MORE](#)

MILLER FALL PROTECTION

GLOSSARY OF TERMS

Activation Distance – the vertical distance from the point of a fall until a fall arrestor, such as an SRL, applies braking or stopping force. Activation distance is a component of arrest distance.

Anchorage – a secure point of attachment for lifelines, lanyards, or deceleration devices.

Anchorage Connector – used to join the connecting device (lanyard, lifeline, or deceleration device) to the anchorage.

ANSI – American National Standards Institute, a non-profit organization that develops and publishes standards for products, services, and procedures across the United States.

Arrest Distance – the required vertical distance needed to arrest a fall. The total includes deceleration and activation distances.

Arresting Force – the force transmitted to the body when a fall is arrested. Also known as Fall Arrest Force.

ASSP – American Society of Safety Professionals, a US organization consisting of occupational safety and health professionals. ASSP manages development of the Z359 standard.

Body Belt – a waist strap for attaching to a lanyard, lifeline, or deceleration device. Used for positioning and/or restraint. Also known as a Safety Belt.

Body Harness – a design of straps which is secured about a person in a manner to distribute fall arresting forces over at least the thighs, pelvis, waist, chest, and shoulders, with provisions for attaching it to other components of a personal fall arrest system. Also known as a Full-Body Harness.

Body Wear – the personal protective equipment worn by a worker, such as a body belt or body harness.

Buckle – an integral connector used to attach straps or webbing segments together or to themselves.

- **Cum Buckle** – an integral connector whereby the shoulder straps can be easily adjusted simultaneously with one hand. Promotes proper snug fit, will not slip or readjust.

- **Friction Buckle** – an integral connector whereby the webbing passes over the knurled bar and back down between the knurled bar and frame to adjust and tighten webbing straps.

- **Mating Buckle** – an integral connector whereby a center bar is pushed through a square link. Webbing is then tightened for proper fit.

- **Quick-Connect Buckle** – for leg and chest harness straps that interlock similar to a seat belt for easy use and features a dual-tab release mechanism to prevent accidental opening.

- **Tongue Buckle** – an integral connector similar to a standard belt buckle whereby a webbing strap is inserted through the buckle placing the buckle tongue through the appropriate geometric hole. Also known as a Dismount Buckle.

Competent Person – one who is capable of identifying existing and predictable hazards in the surroundings or working conditions which are hazardous, or dangerous to employees, and who has the authority to take prompt corrective measures to eliminate them.

Connecting Device – the critical link which joins the body wear to the anchorage/anchorage connector, such as a shock-absorbing lanyard, fall limiter, self-retracting lifeline, rope grab, etc.

Connector – a mechanism or device used to join together components of a personal fall arrest system or parts of a component within the system. See also: Hardware.

D-Ring – an integral component or provision, commonly found on body wear and some anchorage connectors, which allows for attaching a connecting device (lanyard, lifeline, or deceleration device).

Declaration of Conformity – A manufacturer document that states a product conforms to an applicable standard.

Deceleration Device – any mechanism which serves to dissipate energy during a fall arrest, limiting the forces imposed on a person.

Deceleration Distance – the additional vertical distance a falling person travels, excluding lifeline elongation and free fall distance, before stopping, from the point at which the deceleration device begins to operate. It is measured as the distance between the location of a person's body harness attachment point at the moment of activation (onset of fall arrest forces) of the deceleration device during a fall, and the location of that attachment point after the person comes to a full stop.

Energy Absorber – an object that buffers a user from fall arrest forces.

Fall Arrest – an action that stops a free fall.

Fall Indicator – a safety device, i.e., warning flag, which serves to let a user know that a shock-absorbing lanyard, harness or self-retracting lifeline has been involved in a fall and should be removed from service.

Fall Limiter – a self-retracting lifeline/lanyard with a quick-activating braking system that limits a free fall (Ex: Miller Scorpion™ and Miller TurboLift™). Refer to Self-Retracting Lifeline/Lanyard.

Fall Protection – a system or equipment that prevents or mitigates the effect of a fall.

Free Fall – the act of falling before the personal fall arrest system begins to arrest the fall.

Free Fall Distance – the vertical distance a person falls before the fall arrest system begins to arrest the fall.

Full-Body Harness – see Body Harness.

Hardware – buckles, D-rings, snap hooks, and associated connectors which are used to attach components of a personal fall arrest system or parts of a component within the system.

Lanyard – a flexible line of rope, wire rope/cable, or webbing which generally has a connector at each end for securing a body belt or body harness to a lifeline, deceleration device, or anchorage.

Lanyard Ring – a component of a body harness that allows the user to attach a lanyard when not in use so that it is not hanging freely.

Leading Edge – a working or walking surface with an unprotected edge that presents a fall hazard.

Lifeline – a line provided for direct or indirect attachment to a body belt, body harness, lanyard, or deceleration device. Such lifelines may be horizontal or vertical in application.

Lower Level – an area or surface to which a person can fall.

Maximum Arrest Force – the peak force on the body during arrest of a fall by the fall arrest system. Also known as Peak Fall Arrest Force.

Maximum Elongation – the maximum distance a shock absorber will deploy to arrest a fall.

Personal Fall Arrest System – an arrangement of components that together will arrest a person in a fall from a working level. It typically consists of an anchorage, connecting device, and body harness, and may include a lanyard, deceleration device, lifeline, or a combination of these.

Personal Fall Limiter (PFL) – a self-retracting lanyard with a quick-activating braking system that limits a free fall. In addition, a PFL offers versatility through dual operation, by either attaching directly to the harness back D-ring for use as a personal fall limiter, or can be used as a traditional retractable lifeline. (Ex: Miller Scorpion™ and Miller TurboLift™).

Positioning Device – a body belt or harness that keeps an elevated user vertically supported while keeping his or her hands free. Limits free fall to 2 feet or less.

Qualified Person – an accredited professional in fall protection and rescue who can design, assess, or specify fall protection and rescue systems.

MILLER FALL PROTECTION

GLOSSARY OF TERMS

Required Fall Clearance – the maximum vertical distance between the full-body harness attachment point and the lowest extremity of the body before and after the fall is arrested including lanyard extension and/or deceleration distance.

Retractable Lifeline – see Self-Retracting Lifeline/Lanyard.

Roll-out – a process by which a snap hook, carabiner, or similar device unintentionally disengages from another component to which it is attached.

Rope Grab – a deceleration device which travels on a lifeline and automatically engages the lifeline and locks to arrest a fall.

- **Trailing Rope Grab** – a rope grab which moves freely up and down the lifeline with hands-free operation.

Self-Retracting Lifeline/Lanyard – a deceleration device containing a drum-wound line which can be slowly extended from or retracted onto the drum under slight tension during normal worker movement, and which, after onset of a fall, automatically locks the drum and arrests the fall. (Ex: Miller MightyLift®, Falcon™ and Black Rhino™ Self-Retracting Lifelines.) Refer to Fall Limiter.

Shock Absorber – a component of a personal fall arrest system which allows dissipation of energy by extending deceleration distance, reducing fall arrest forces.

Shock-Absorbing Lanyard – specially designed lanyard that elongates during a fall to significantly reduce fall arresting forces.

Snaphook – a hook-shaped self-closing, and self-locking connector that can secure onto, or release from, an object.

Snap Hook – a connector with a hook-shaped member, keeper, latch or other similar arrangement which may be opened to receive an object and, when released, automatically closes to retain the object.

- **Locking Snap Hook** – a snap hook that includes a locking mechanism which will keep the hook closed and locked until manually unlocked and opened.

SRD – Self-Retracting Device, a device with a drum-wound line that locks when a user falls. An SRD extends and retracts its line during an attached user's normal movement. The onset of a fall causes the device to lock the drum and arrest the fall. The term is often interchanged in the field with Self-Retracting Lifeline (SRL) and Personal Fall Limiter (PFL). Nicknames include "yo-yo" and "backpack."

SRL – Self-Retracting Lifeline, a mechanical fall arrestor with a locking mechanism and energy absorber to arrest a fall and limits forces on the user. The term is often interchangeable with Self-Retracting Device (SRD) and Personal Fall Limiter (PFL).

Strap – a length of webbing.

Stretchable Harness – a full-body harness that is more comfortable to wear because the webbing is a blend of nylon, polyester, and a specially formulated elastomer that stretches. Includes provisions for attaching a lanyard, lifeline, or deceleration device.

Sub-Pelvic Strap – a full-body harness strap, which passes under the buttocks without passing through the crotch, that is designed to transmit forces applied during fall arrest or post-fall suspension to the sub-pelvic part of the body.

- **Suspension Trauma (Orthostatic Intolerance)** – when a person falls and remains both vertical and sedentary for a period of time, blood pools in the veins of the legs, which could result in unconsciousness. If a person is not rescued quickly, permanent damage and possibly death may result. (Ex: Miller Roll-Stop™ Safety Device.) Tie-Back Lanyard – a flexible line of heavy-duty abrasion-resistant webbing designed to be used as the connecting device and anchorage connector with a specially-engineered snap hook able to withstand 22 kN (5,000 lb). (Ex: Miller BackBiter™ Tie-Back Lanyard.)

Swing Fall – a type of fall that occurs when someone falls from a point horizontal to a fixed anchorage. A person will move in a pendulum-like motion after the initial vertical fall.

Total Fall Clearance Distance – the maximum vertical distance that a worker could potentially fall and still avoid contact with a lower level.



MILLER FALL PROTECTION

INDEX

024-101-001	p37	207LS-27/3FTG	p86	300L-27/250FTBL	p86
024-101-002	p37	207LS-27/4FTG	p86	300L-27/25FTBL	p86
024-102-001	p37	207LS-27/6FTG	p86	300L-27/30FTBL	p86
024-102-002	p37	207NLS-27/3FTV	p86	300L-27/50FTBL	p86
024-105-001	p37	207NLS-27/5FTV	p86	300L-27/50FTBL	p86
024-105-002	p37	210TWLS-27/6FTGN	p86	300L-27/75FTBL	p86
1005709	p28	210TWLS-27/8FTGN	p86	3012-4016-001	p19
1010608	p28	210NLS-27/5FTVL	p86	3NA/LBK	p69
1013720	p28	210NLS-27/6FTVL	p86	3NA/MBK	p69
1036778	p67	212WLS-27/3FTVL	p86	3NA/SBK	p69
123N/LBK	p69	213TWLS-27/2FTGN	p86	3NA/XLBK	p69
123N/MBK	p69	213TWLS-27/3FTGN	p86	3NA/XXLBK	p69
123N/SBK	p69	213TWLS-27/4FTGN	p86	410V	p14
123N/XLBK	p69	213TWLS-27/6FTGN	p86	415V	p15
123N/XXLBK	p69	213WLS-27/3FTVL	p86	416V	p15, 23
124N/LBK	p69	213WLS-27/4FTVL	p86	416SV	p15, 24, 28
124N/MBK	p69	213WLS-27/6FTVL	p86	417V	p15, 23
124N/SBK	p69	213WLS-27/8FTVL	p86	417C/	p12
124N/XLBK	p69	216MK-27/6FTBK	p86	417CBOLT/	p12
124N/XXLBK	p69	216M-27/4FTGN	p82	417SS/	p15, 24, 28
150084/WMANT	p31	216TWLS-27/6FTGN	p83	418V	p15
170-1	p112	216WLS-27/4FTVL	p83	440VFT	p11
170-1/	p14, 111, 113	216WLS-27/6FTVL	p83	450V	p14
170-1PIN/	p14	219M/4FTGN	p82	455V	p14
170-2-2T/	p14	219MK-27/6FTBK	p86	470V	p13
170-3-2T/	p14	219MD/6FTGN	p82	475V	p14
180-1/	p14	219M-27/6FTGN	p82	475-1/	p14
180-1-PINONLY/	p14	219TWLS-27/6FTGN	p83	475-2/	p14
180-2-2T/	p14	219WRS-27/6FTVL	p83	51/7FT	p108
1816/18MBK	p68	226TWLS-27/2FTGN	p86	51X79FT	p108
19168/18MBK	p68	226TWLS-27/3FTGN	p86	526-001-001R	p17
1916K/18MBK	p68	226WRS-27/3FTVL	p86	526-102-001	p17
1940-2730FTWH	p86	226WRS-27/4FTVL	p86	526-105-001	p17
1940-2750FTWH	p86	226WRS-27/6FTVL	p86	527-101-001R	p17
1950-2730FTWH	p86	231MAL/6FTGN	p82	527-102-001	p17
1950-2750FTWH	p86	231M-27/6FTGN	p82	527-106-001	p17
1950-2775FTWH	p86	231TWLS-27/6FTGN	p83	6004R5/YL	p113
201RLS-2/25FTWH	p86	232M-27/6FTGN	p82	602-100-003-H5	p18
201RLS-2/30FTWH	p86	232TWLS-27/6FTGN	p83	6414N/LBK	p69
201RLS-2-27/10FTWH	p86	233MK-27/6FTBK	p86	6414N/MBK	p69
201RLS-2-27/3FTWH	p86	233MORS-27/6FTGN	p82	6414N/SBK	p69
201RLS-2-27250FTWH	p86	233MM/6FTBK	p86	6414N/SBK	p69
201RLS-2-27/6FTWH	p86	233TWLS-27/6FTGN	p83	6756RS4-2T/	p87
201RLS-5/100FTWH	p86	23949	p28	6756RS-2T/	p87
201RLS-5/25FTWH	p86	2NA/LBK	p69	6757WRS-27/27INGN	p87
201RLS-5/50FTWH	p86	2NA/MBK	p69	6757WRS-27/33INGN	p87
201RLS-8/2FTWH	p86	2NA/SBK	p69	67800R5/1	p108
201RLS-8/3FTWH	p86	2NA/XLBK	p69	70-100V100FT	p113
201RLS-8/6FTWH	p86	2NA/XXLBK	p69	70-100V200FT	p113
201RLS-8-27/6FTWH	p86	300L-27/100FTBL	p86	702R/RK	p88
202HRS-2/125FTWH	p86	300L-27/10FTBL	p86	70-C/	p113
202HRS-2/35FTWH	p86	300L-27/125FTBL	p86	731-201-001	p38, 65
202HRS-2/50FTWH	p86	300L-27/150FTBL	p86	731-201-002	p38, 65
203RLS-2/6FTWH	p86	300L-27/200FTBL	p86	731-201-002	p38, 65

MILLER FALL PROTECTION

INDEX

733-201-004	p38	828TH/YL	p88	9081/85FT	p17
803-101-054K	p37	8440-SS-2T/	p109	908L/SF	p17
803-102-054	p37	8440-27/60FTBR	p109	908L/SF	p17
803-105-054	p37	8441-27/88FT	p109	908L/WANXLE	p17
808-101-042K	p37	8442SC-27/85FT	p109	908L/PIN	p17
808-101-142	p37	8442SC-27/65FT	p109	908L/SFK23	p17
808-102-042	p37	8442SS-27/100FT	p109	908L/WF	p17
808-102-142	p37	8442SS-27/65FT	p109	908L/WR	p17
808-105-042	p37	8442-27/100FT	p109	908/LABELS/	p17
808-105-142	p37	8442-27/65FT	p109	908/MMBV	p17
8113V	p113	84YTHLL/BK	p68	908/PADKIT/	p17
8173/U	p89	850K/SMBL	p64	908WY/100LB	p17
8174/U	p89	850K/LBL	p64	909V/1	p57
8174NLSA/4FTVL	p89	850K/XXLBL	p64	909V/36BULK	p57
8174WLS-27/2FTVL	p89	850K/XXLBL	p64	909V/12-HS	p57
8175/U	p89	850KQC/SMBK	p64	910TWLS-27/6FTGN	p88
8175NLS/2FTVL	p89	850KQC/SBK	p64	910WLS/6FTVL	p90
8175NLS-27/3FTVL	p89	850KQC/XXLBK	p64	9136/4FTGN	p88
8175WLS/3FTVL	p89	87988/6FTGN	p89	9136/6FTGN	p88
8175-27/	p89	87988R/6FTBK	p89	91380/6FTGN	p89
8180V22INGN	p15	87988V/6FTBL	p89	9138R-27/6FTBK	p84
8183/10FTGN	p11	87988V-27/4FT88	p84	9138-27/4FTBK	p84
8183/15FTGN	p11	87988V-27/6FT88	p84	9138-27/6FTBK	p84
8183/20FTGN	p11	87988-27/6FTBK	p84	9138-27/6FTBL	p84
8183/25FTGN	p11	8798PC/6FTGN	p88	9138SS-27/6FTGN	p87
8183/2FTGN	p11	8798PCV/6FTGN	p88	913SS-27/6FTGN	p87
8183/4FTGN	p11	8798SS-27/4FTGN	p87	913TWLS-27/3FTGN	p88
8183/5FTGN	p11	8798SS-27/6FTGN	p87	913TWLS-27/4FTGN	p88
8183/6FTGN	p11	8798SS-27/6FTGN	p87	913TWLS-27/6FTGN	p88
8183/8FTGN	p11	8798TS-27/6FTGN	p88	922PC8/6FTGN	p88
8184/3FTGN	p11	8798T-27/3FTGN	p88	928LS-27/18MBK	p80
8184/6FTGN	p11	8798T-27/6FTGN	p88	933KR-27/6FTBK	p84
8185/2FTGN	p11	8798H-27/6FTBK	p84	933H-27/6FTBK	p84
8185/3FTGN	p11	8814-12/	p12	940R/6FTGN	p88
8185/4FTGN	p11	8814-24/	p12	940R-27/6FTBK	p89
8185/5FTGN	p11	8815-12/	p12	940N-27/6FTBK	p89
8185/6FTGN	p11, 111, 112, 113	8815-24/	p12	940N-27/6FTBK	p89
8185C/2FTGN	p12	8816-14/	p12	940RS-XL-27/6FTGN	p87
8185C/3FTGN	p12	8836/	p108	940WLS-27/6FTGN	p80
8185C/4FTGN	p12	8878T-27/6FTGN	p88	9800/6FTGN	p88
8185K/2FTBK	p11	8878T-27/6FTBK	p88	980KR-27/6FTBK	p89
8185K/3FTBK	p11	8927/18INGN	p88	980R50-27/6FT	p57
8185K/6FTBL	p11	8927/8INGN	p88	980R50-27/6FT	p50
8186V-27/10FTV	p13	8928-27/18MBK	p88	980R50-8F-27/6FTGN	p87
8186V-27/3FTV	p13	901HLS-8-27/6FTWH	p88	980WLS-27/6FTGN	p90
8186V-27/4FTV	p13	9025V	p109	980WRS-27/6FT	p90
8186V-27/6FTV	p13	9054EW/	p109	AAF-QC238L	p50
8187V/10FTV	p13	9058/15FTBK	p113	AAF-QCRDP238L	p51
8187V/3FTV	p13	9058/25FTBK	p113	AAF-QCRDP238L	p50
8187V/4FTV	p13	9058/30FTBK	p113	AAF-QCRDP58H	p51
8187V/6FTV	p13	9065/RK	p15	AAF-QCRDP58H	p50
8187V/8FTV	p13	9065-1/	p15	AAF-QCRDPH8L	p51
8187V/8FTV	p13	9065-2/	p15	AAF-QCRDPH8L	p50
8185/100FTMH	p113	9065W/	p109	AAF-QC0238H	p51
8185/150FTMH	p113	9074-27/6FTBL	p45	AAF-QC0238H	p50
8185/75FTBK	p113	907NLS-27/6FTVL	p90	AAF-QC058H	p51
828CH/YL	p88	9081/	p17	AAF-QC058H	p50

MILLER FALL PROTECTION INDEX

ACT-QCWDUG
ACT-QCXYRL
ACT-QCXYWG
ACT-QCUB
ACT-QCUGL
ARL-100-27/8FT
CMB/
DH-1/
DH-1003/
DH-102P/
DH-11/19S
DH-11/21S
DH-11/23S
DH-11/25S
DH-11/27S
DH-12/
DH-13/
DH-13/4FT
DH-14/
DH-15/
DH-16/
DH-17/
DH-18/
DH-19/
DH-19-MILLER/
DH-2/
DH-2003/
DH-202P/
DH-21/
DH-22/21
DH-22/33
DH-22/45
DH-22/57
DH-23
DH-24
DH-25
DH-3/
DH-4/
DH-4WK/
DH-5/
DH-6/
DH-735/
DH-72P/
DH-833/
DH-82P/
DH-883/
DH-92P/
DH-AB-381/
DH-AB-381/10
DH-AB-MILLER/
DH-AP-1/
DH-AP-10/
DH-AP-11/
DH-AP-12/
DH-AP-2/
DH-AP-3/
DH-AP-4/
DH-AP-5/
DH-AP-6/
DH-AP-7/
DH-AP-8/
DH-AP-9/
DH-AP-10/
DH-AP-11/
DH-AP-12/
DH-AP-13/
DH-AP-14/
DH-AP-15/
DH-AP-16/
DH-AP-17/
DH-AP-18/
DH-AP-19/
DH-AP-20/
DH-AP-21/
DH-AP-22/
DH-AP-23/
DH-AP-24/
DH-AP-25/
DH-AP-26/
DH-AP-27/
DH-AP-28/
DH-AP-29/
DH-AP-30/
DH-AP-31/
DH-AP-32/
DH-AP-33/
DH-AP-34/
DH-AP-35/
DH-AP-36/
DH-AP-37/
DH-AP-38/
DH-AP-39/
DH-AP-40/
DH-AP-41/
DH-AP-42/
DH-AP-43/
DH-AP-44/
DH-AP-45/
DH-AP-46/
DH-AP-47/
DH-AP-48/
DH-AP-49/
DH-AP-50/
DH-AP-51/
DH-AP-52/
DH-AP-53/
DH-AP-54/
DH-AP-55/
DH-AP-56/
DH-AP-57/
DH-AP-58/
DH-AP-59/
DH-AP-60/
DH-AP-61/
DH-AP-62/
DH-AP-63/
DH-AP-64/
DH-AP-65/
DH-AP-66/
DH-AP-67/
DH-AP-68/
DH-AP-69/
DH-AP-70/
DH-AP-71/
DH-AP-72/
DH-AP-73/
DH-AP-74/
DH-AP-75/
DH-AP-76/
DH-AP-77/
DH-AP-78/
DH-AP-79/
DH-AP-80/
DH-AP-81/
DH-AP-82/
DH-AP-83/
DH-AP-84/
DH-AP-85/
DH-AP-86/
DH-AP-87/
DH-AP-88/
DH-AP-89/
DH-AP-90/
DH-AP-91/
DH-AP-92/
DH-AP-93/
DH-AP-94/
DH-AP-95/
DH-AP-96/
DH-AP-97/
DH-AP-98/
DH-AP-99/
DH-AP-100/
DH-AP-101/
DH-AP-102/
DH-AP-103/
DH-AP-104/
DH-AP-105/
DH-AP-106/
DH-AP-107/
DH-AP-108/
DH-AP-109/
DH-AP-110/
DH-AP-111/
DH-AP-112/
DH-AP-113/
DH-AP-114/
DH-AP-115/
DH-AP-116/
DH-AP-117/
DH-AP-118/
DH-AP-119/
DH-AP-120/
DH-AP-121/
DH-AP-122/
DH-AP-123/
DH-AP-124/
DH-AP-125/
DH-AP-126/
DH-AP-127/
DH-AP-128/
DH-AP-129/
DH-AP-130/
DH-AP-131/
DH-AP-132/
DH-AP-133/
DH-AP-134/
DH-AP-135/
DH-AP-136/
DH-AP-137/
DH-AP-138/
DH-AP-139/
DH-AP-140/
DH-AP-141/
DH-AP-142/
DH-AP-143/
DH-AP-144/
DH-AP-145/
DH-AP-146/
DH-AP-147/
DH-AP-148/
DH-AP-149/
DH-AP-150/
DH-AP-151/
DH-AP-152/
DH-AP-153/
DH-AP-154/
DH-AP-155/
DH-AP-156/
DH-AP-157/
DH-AP-158/
DH-AP-159/
DH-AP-160/
DH-AP-161/
DH-AP-162/
DH-AP-163/
DH-AP-164/
DH-AP-165/
DH-AP-166/
DH-AP-167/
DH-AP-168/
DH-AP-169/
DH-AP-170/
DH-AP-171/
DH-AP-172/
DH-AP-173/
DH-AP-174/
DH-AP-175/
DH-AP-176/
DH-AP-177/
DH-AP-178/
DH-AP-179/
DH-AP-180/
DH-AP-181/
DH-AP-182/
DH-AP-183/
DH-AP-184/
DH-AP-185/
DH-AP-186/
DH-AP-187/
DH-AP-188/
DH-AP-189/
DH-AP-190/
DH-AP-191/
DH-AP-192/
DH-AP-193/
DH-AP-194/
DH-AP-195/
DH-AP-196/
DH-AP-197/
DH-AP-198/
DH-AP-199/
DH-AP-200/
DH-AP-201/
DH-AP-202/
DH-AP-203/
DH-AP-204/
DH-AP-205/
DH-AP-206/
DH-AP-207/
DH-AP-208/
DH-AP-209/
DH-AP-210/
DH-AP-211/
DH-AP-212/
DH-AP-213/
DH-AP-214/
DH-AP-215/
DH-AP-216/
DH-AP-217/
DH-AP-218/
DH-AP-219/
DH-AP-220/
DH-AP-221/
DH-AP-222/
DH-AP-223/
DH-AP-224/
DH-AP-225/
DH-AP-226/
DH-AP-227/
DH-AP-228/
DH-AP-229/
DH-AP-230/
DH-AP-231/
DH-AP-232/
DH-AP-233/
DH-AP-234/
DH-AP-235/
DH-AP-236/
DH-AP-237/
DH-AP-238/
DH-AP-239/
DH-AP-240/
DH-AP-241/
DH-AP-242/
DH-AP-243/
DH-AP-244/
DH-AP-245/
DH-AP-246/
DH-AP-247/
DH-AP-248/
DH-AP-249/
DH-AP-250/
DH-AP-251/
DH-AP-252/
DH-AP-253/
DH-AP-254/
DH-AP-255/
DH-AP-256/
DH-AP-257/
DH-AP-258/
DH-AP-259/
DH-AP-260/
DH-AP-261/
DH-AP-262/
DH-AP-263/
DH-AP-264/
DH-AP-265/
DH-AP-266/
DH-AP-267/
DH-AP-268/
DH-AP-269/
DH-AP-270/
DH-AP-271/
DH-AP-272/
DH-AP-273/
DH-AP-274/
DH-AP-275/
DH-AP-276/
DH-AP-277/
DH-AP-278/
DH-AP-279/
DH-AP-280/
DH-AP-281/
DH-AP-282/
DH-AP-283/
DH-AP-284/
DH-AP-285/
DH-AP-286/
DH-AP-287/
DH-AP-288/
DH-AP-289/
DH-AP-290/
DH-AP-291/
DH-AP-292/
DH-AP-293/
DH-AP-294/
DH-AP-295/
DH-AP-296/
DH-AP-297/
DH-AP-298/
DH-AP-299/
DH-AP-300/
DH-AP-301/
DH-AP-302/
DH-AP-303/
DH-AP-304/
DH-AP-305/
DH-AP-306/
DH-AP-307/
DH-AP-308/
DH-AP-309/
DH-AP-310/
DH-AP-311/
DH-AP-312/
DH-AP-313/
DH-AP-314/
DH-AP-315/
DH-AP-316/
DH-AP-317/
DH-AP-318/
DH-AP-319/
DH-AP-320/
DH-AP-321/
DH-AP-322/
DH-AP-323/
DH-AP-324/
DH-AP-325/
DH-AP-326/
DH-AP-327/
DH-AP-328/
DH-AP-329/
DH-AP-330/
DH-AP-331/
DH-AP-332/
DH-AP-333/
DH-AP-334/
DH-AP-335/
DH-AP-336/
DH-AP-337/
DH-AP-338/
DH-AP-339/
DH-AP-340/
DH-AP-341/
DH-AP-342/
DH-AP-343/
DH-AP-344/
DH-AP-345/
DH-AP-346/
DH-AP-347/
DH-AP-348/
DH-AP-349/
DH-AP-350/
DH-AP-351/
DH-AP-352/
DH-AP-353/
DH-AP-354/
DH-AP-355/
DH-AP-356/
DH-AP-357/
DH-AP-358/
DH-AP-359/
DH-AP-360/
DH-AP-361/
DH-AP-362/
DH-AP-363/
DH-AP-364/
DH-AP-365/
DH-AP-366/
DH-AP-367/
DH-AP-368/
DH-AP-369/
DH-AP-370/
DH-AP-371/
DH-AP-372/
DH-AP-373/
DH-AP-374/
DH-AP-375/
DH-AP-376/
DH-AP-377/
DH-AP-378/<

116

MILLER FALL PROTECTION

INDEX

H5APC251	p61	H5S311101	p57	HTCC3AS0	p43
H5APC252	p61	H5S311103	p57	HTCC3AS1	p43
H5APC253	p61	H5S3111061	p58	HTCC3AS2	p43
H5CC221121	p57	H5S3111052	p58	HTCC3AS3	p43
H5CC221122	p57	H5S3111053	p58	HTCC3AS4	p43
H5CC221123	p57	H5S311121	p58	HTCL1A0	p43
H5CC222021	p58	H5S311122	p58	HTCL1A1	p43
H5CC222022	p58	H5S311123	p58	HTCL1A2	p43
H5CC222023	p58	H5S311101	p58	HTCL1A3	p43
H5CC222221	p58	H5S311102	p58	HTCL1A4	p43
H5CC222222	p58	H5S311103	p58	HTC2A0	p43
H5CC222223	p58	H5S311111	p58	HTC2A1	p43
H5CC311001	p57	H5S311112	p58	HTC2A2	p43
H5CC311002	p57	H5S311113	p58	HTC2A3	p43
H5CC311003	p57	H5SP111001	p58	HTC2A4	p43
H5CC311020	p57	H5SP111002	p58	HTC2A50	p43
H5CC311021	p57	H5SP111003	p58	HTC2AS1	p43
H5CC311022	p57	H5SP111021	p58	HTC2AS2	p43
H5CC311023	p57	H5SP111022	p58	HTC2AS3	p43
H5CC311120	p57	H5SP111023	p58	HTC2AS4	p43
H5CC311121	p57	H5SP221001	p58	HTC3A0	p43
H5CC311122	p57	H5SP221002	p58	HTC3A1	p43
H5CC311123	p57	H5SP221003	p58	HTC3A2	p43
H5CC312221	p58	H5SP221021	p58	HTC3A3	p43
H5CC312222	p58	H5SP221022	p58	HTC3A4	p43
H5CC312223	p58	H5SP221023	p58	HLLC5-10FT	p25
H5CS221021	p57	H5SP311001	p57	HLLR2-L/30FT	p25, 105
H5CS221022	p57	H5SP311002	p57	HLLR2-L/50FT	p25, 106
H5CS221023	p57	H5SP311003	p57	HLLR2-Z/30FT	p25
H5CS311021	p57	H5SP311021	p57	HLLR2-Z/60FT	p25
H5CS311022	p57	H5SP311022	p57	MPS-LEP1-02/20FT	p80
H5CS311023	p57	H5SP311023	p57	MPS-LEP1-02/30FT	p80
H5CS3110251	p57	H5SP321001	p58	MPS-LEP1-02/50FT	p80
H5CS3110252	p57	H5SP321002	p58	MPS-LES1-01/20FT	p80
H5CS3110253	p57	H5SP321003	p58	MPS-LES1-01/30FT	p80
H5K221001	p57	H5W51B1	p65	MPS-LES1-02/50FT	p80
H5K221002	p57	H5W51B2	p65	MPS-OGC1-02/30FT	p82
H5K221003	p57	H5W51B3	p65	MPS-OGC1-02/30FT	p82
H5K221021	p57	H5W52S1	p65	MPS-OGC1-02/50FT	p82
H5K221022	p57	H5W52S2	p65	MME-GCB1-01/100FT	p108
H5K221023	p57	H5W52S3	p65	MME-GCB1-01/130FT	p108
H5K221101	p57	H7CC1A0	p43	MME-GCB1-02/50FT	p108
H5K221102	p57	H7CC1A1	p43	MME-GCB1-02/50FT	p108
H5K221103	p57	H7CC1A2	p43	MME-GCB1-02/50FT	p108
H5K222021	p58	H7CC1A3	p43	MME-GCB1-02/50FT	p108
H5K222022	p58	H7CC1A4	p43	MME-GKT1-02/100FT	p108
H5K222023	p58	H7CC2A0	p43	MME-GKT1-02/130FT	p108
H5K2111000	p57	H7CC2A1	p43	MME-GKT1-02/50FT	p108
H5K2111001	p57	H7CC2A2	p43	MME-GKT1-02/50FT	p108
H5K2111002	p57	H7CC2A3	p43	MME-GKT1-02/40FT	p108
H5K2111003	p57	H7CC2A4	p43	MME-KK01-02/40FT	p108
H5K2111120	p57	H7CC2A4	p43	MME-KL81-02/40FT	p108
H5K2111121	p57	H7CC2A4	p43	MME-OGC1-02/100FT	p108
H5K2111122	p57	H7CC2A2	p43	MME-OGC1-02/130FT	p108
H5K2111123	p57	H7CC2A3	p43	MME-OGC1-02/50FT	p108
H5S311101	p57	H7CC2A4	p43	MME-ORR1-02/40FT	p108

MILLER FALL PROTECTION

INDEX

MME-DHK1-02/85FT	p108	MTL-OWF2-63/6FT	p79	MTL-OHW1-71/11FT	p71
MME-DSS1-01/100FT	p108	MTL-OWF2-65/6FT	p79	MTL-OHW2-21/11FT	p75
MME-DSS1-01/130FT	p108	MTL-OWF2-65/9FT	p79	MTL-OHW2-21/6FT	p75
MME-DSS1-01/50FT	p108	MTL-OWF2-67/6FT	p79	MTL-OHW2-22/11FT	p75
MME-SCB1-01/100FT	p108	MTL-OWF2-67/9FT	p79	MTL-OHW2-22/6FT	p75
MME-SCB1-01/130FT	p108	MTL-OWF2-68/9FT	p79	MTL-OHW2-22/11FT	p75
MME-SCB1-01/50FT	p108	MTL-OH51-01/8FT	p76, 85	MTL-OHW2-22/6FT	p75
MME-SKN1-01/50FT	p108	MTL-OH51-01/9FT	p76	MTL-OHW2-25/11FT	p75
MME-SKT1-01/50FT	p108	MTL-OH51-02/9FT	p76	MTL-OHW2-25/6FT	p75
MML-OGC1-02/100FT	p81	MTL-OH51-03/9FT	p76, 85	MTL-OTEL-64/9FT	p78
MML-OGC1-02/130FT	p81	MTL-OH51-05/8FT	p76	MTL-OTEL-64/9FT	p78
MML-OGC1-02/20FT	p81	MTL-OH51-05/9FT	p76	MTS-OGC1-02/30FT	p83
MML-OGC1-02/30FT	p81	MTL-OH51-07/9FT	p76	MTS-OGC1-02/50FT	p83
MML-OGC1-02/50FT	p81	MTL-OH51-08/9FT	p76	P950/3/ACN	p59
MML-OHKL-02/40FT	p81	MTL-OH51-11/9FT	p76	P950/3/ACN	p59
MML-OHKL-02/85FT	p81	MTL-OH51-14/9FT	p76	P950/XXLGN	p59
MML-OB51-01/100FT	p81	MTL-OH51-15/9FT	p76	P950/XXLGN	p59
MML-OB51-01/130FT	p81	MTL-OH51-16/9FT	p76	P950-4/5/ACN	p59
MML-OB51-01/20FT	p81	MTL-OH51-17/9FT	p76	P950-4/ACN	p59
MML-OB51-01/30FT	p81	MTL-OH51-31/9FT	p76	P950-4/XXLGN	p59
MML-OB51-01/50FT	p81	MTL-OH51-38/9FT	p76	P950-5/5/ACN	p59
MTL-APAL-63/4 SFT	p79	MTL-OH51-35/9FT	p76	P950-5/6/ACN	p59
MTL-APAL-67/4 SFT	p79	MTL-OH51-58/9FT	p76	P950-5/6/XXLGN	p59
MTL-APB1-30/6FT	p79	MTL-OH51-71/9FT	p76	P9500QC/3/ACN	p59
MTL-APB1-31/6FT	p79	MTL-OH51-80/9FT	p76	P9500QC/4/BL	p59
MTL-LEP1-61/6FT	p77	MTL-OH51-81/8FT	p76	P9500QC/XXLBL	p59
MTL-LEP1-61/9FT	p77	MTL-OH52-21/9FT	p76	P950FD-3/5/5/ACN	p59
MTL-LEP1-62/6FT	p77	MTL-OH52-22/9FT	p76	P950FD-3/6/ACN	p59
MTL-LEP1-62/9FT	p77	MTL-OH52-27/9FT	p76	P950FD-3/6/XXLGN	p59
MTL-LEP1-63/6FT	p77	MTL-OH52-38/9FT	p76	P950QC/3/ACN	p59
MTL-LEP1-63/9FT	p77	MTL-OHW1-01/11FT	p75	P950QC/ACN	p59
MTL-LEP1-67/6FT	p77	MTL-OHW1-01/8FT	p75	P950QC/XXLGN	p59
MTL-LEP1-67/9FT	p77	MTL-OHW1-02/6FT	p75	P950QC/XXLGN	p59
MTL-LEP1-68/6FT	p77	MTL-OHW1-03/11FT	p75, 85	P950QC-7/5/ACN	p59
MTL-LEP1-68/9FT	p77	MTL-OHW1-03/6FT	p75, 85	P950QC-7/XXLGN	p59
MTL-LEP2-61/6FT	p77	MTL-OHW1-04/11FT	p75	P950QC-7/XXLGN	p59
MTL-LEP2-61/9FT	p77	MTL-OHW1-04/6FT	p75	P950QC-7/XXLGN	p59
MTL-LEP2-62/6FT	p77	MTL-OHW1-05/11FT	p75	QP/100FT	p112
MTL-LEP2-62/9FT	p77	MTL-OHW1-05/6FT	p75	QP/25FT	p112
MTL-LEP2-63/6FT	p77	MTL-OHW1-06/6FT	p75	QP/50FT	p112
MTL-LEP2-63/9FT	p77	MTL-OHW1-07/11FT	p75	QP/75FT	p112
MTL-LEP2-67/6FT	p77	MTL-OHW1-07/6FT	p75	QP-1/100FT	p112
MTL-LEP2-67/9FT	p77	MTL-OHW1-08/6FT	p75	QP-1/25FT	p112
MTL-LEP2-68/6FT	p77	MTL-OHW1-08/6FT	p75	QP-1/50FT	p112
MTL-LEP2-68/9FT	p77	MTL-OHW1-10/6FT	p75	QP-6P	p112
MTL-DAF1-01/6FT	p79	MTL-OHW1-11/11FT	p75	QP-BHA	p112
MTL-DAF1-01/6FT	p79	MTL-OHW1-11/6FT	p75	QP-SC	p112
MTL-DAF1-02/9FT	p79	MTL-OHW1-12/11FT	p75	RA15-1/	p38
MTL-DAF1-03/6FT	p79	MTL-OHW1-12/6FT	p75	RA20-1/	p38
MTL-DAF1-05/6FT	p79	MTL-OHW1-14/6FT	p75	RA25-1/	p38
MTL-DAF1-05/9FT	p79	MTL-OHW1-15/6FT	p75	RA35-1/	p38
MTL-DAF1-67/6FT	p79	MTL-OHW1-17/6FT	p75	RA90V	p38
MTL-DAF1-67/9FT	p79	MTL-OHW1-38/11FT	p75	RA90V/08BLK	p38
MTL-DAF1-68/6FT	p79	MTL-OHW1-38/6FT	p75	RA91/	p38
MTL-DAF2-61/6FT	p79	MTL-OHW1-58/11FT	p75	RA91/	p38
MTL-DAF2-62/9FT	p79	MTL-OHW1-58/6FT	p75	ROTED-QC/3XLR	p46

INDEX

SG8815-12/60FT	p23
SG8815-24/60FT	p23
SGA1-55	p28
SGC	p20
SGC/120FT	p20
SGC/180FT	p20
SGC/240FT	p20
SGC/300FT	p20
SGC/36FT	p20
SGC/60FT	p20
SGCA	p20
SGCH	p20
SGCT	p20
SGH	p20, 27
SGLL6/30FT	p106
SGLL6/60FT	p106
SGLL6-PS/120FT	p24
SGLL6-PS/180FT	p24
SGLL6-PS/240FT	p24
SGLL6-PS/30FT	p24
SGLL6-PS/40FT	p24
SGLL6-PS/60FT	p24
SGP-HS	p22
SGS18	p21
SGS18/120FT	p21
SGS18/180FT	p21
SGS18/240FT	p21
SGS18/300FT	p21
SGS18/36FT	p21
SGS18/60FT	p21
SGS36	p21
SGS36/120FT	p21
SGS36/180FT	p21
SGS36/240FT	p21
SGS36/300FT	p21
SGS36/36FT	p21
SGS36/60FT	p21
SGSH18	p21
SGSH36	p21
SGSEXT18	p21
SGSEXT36	p21
SGSEXTPH	p22
SGTB	p22
SGTB-FS	p22
SGT	p22
SGVG	p22
SGW	p22
SGW-FS/SS	p22
SGX	p22
SGXK	p22, 23
SGXK-FS	p22, 23, 24
SCHCABLEMT	p18
SCHCNRTE	p18
SCHB-WBCOM	p18
SCHB-WBSPN	p18
SCHB-WBRACE	p18

INDEX



Miller - Limitless Possibilities. Ask the Expert.

www.millerfallgasolutions.com
Technical Service 800-873-5242

©PPL, LLC 2015/08/04 2015
©Protective Industrial Products, Inc.

PIP
GLOBAL SAFETY