

# Welders Heat Resistant Harness

w/Ultra-Lite™ Energy Absorber and Cover

Ideal for welders, steel fabricators and workers exposed to high heat, leading edge and free fall hazards.

## No.6174-EA Front



Label Pack Cover

Aramid/polyester webbing is non-conductive and designed to withstand temperatures of up to 482°F and prolonged temperatures of 220°F. Highly resistant to cuts, tears, salt air, abrasion and chemicals.

## No.6174-EA Back



No.6179-HR2 Cover

No.5006-Z Alum. Twist Lock Carabiner

PID Labels Stored in a heat resistant cover.



Harness Type ID Label



Pass-Thru Buckles



Lanyard Parks

## Specifications

**Material:** 1-3/4" Aramid/polyester

**Min. Tensile Strength:** 6,000lb.

**Connectors/D-ring:** ANSI certified min. 5,000lb tensile strength. 3,600lb proof load.

**Buckles:** Pass-thru chest/leg straps.

**Finish:** Zinc plating.

**User Wt:** 130-310lb

## Compliance

Fall Arrest/Fall Restraint

ANSI Z-359.11-21 Type A / OSHA 1926.502

**Heat Certification:** ISO 150125:2016

SGS Report 06-30-2025


## Request Unit Pricing

| Part No.  | Size    | Fits Ht.* | Wt.       |
|-----------|---------|-----------|-----------|
| 6174-EAS  | Small   | 5'-5"     | 90-130lb  |
| 6174-EAM  | Medium  | 5'-10"    | 130-160lb |
| 6174-EAL  | Large   | 6'-2"     | 160-220lb |
| 6174-EAXL | X-Large | 6'-4"     | 220-310lb |

*Note: Sizing is not perfect due to body shapes.*

\*+/- 2-4"

English/Spanish Instruction Manuals

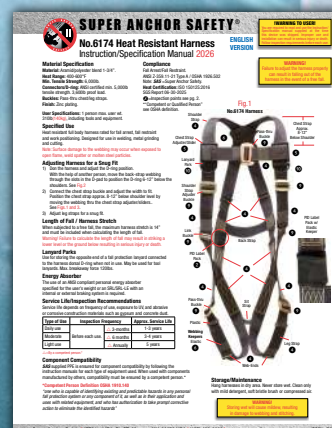

6174 Manual

