

Wire Rope Lanyards

Mfg. with 3/8"x7x19 galvanized wire rope. Double swaging is protected with a clear PVC shrink tube cover.
Mfg. by SAS at Monroe, WA USA factory.

Specifications:

- Min. tensile strength 5,000lb
- Cable strength 14,000lb
- 3/8"x7x19 galv. cable
- Dual aluminum swages w/clear PVC cover
- HDG steel eye thimble
- 3,600lb gate strength snaphooks


Compliance

Connectors: ANSI Z359.12-07/CSA Z259.12
HLL: ANSI Z359.1-07/OSHA 1926.502

PID Labels

No.1333
PID

No.1334
PID

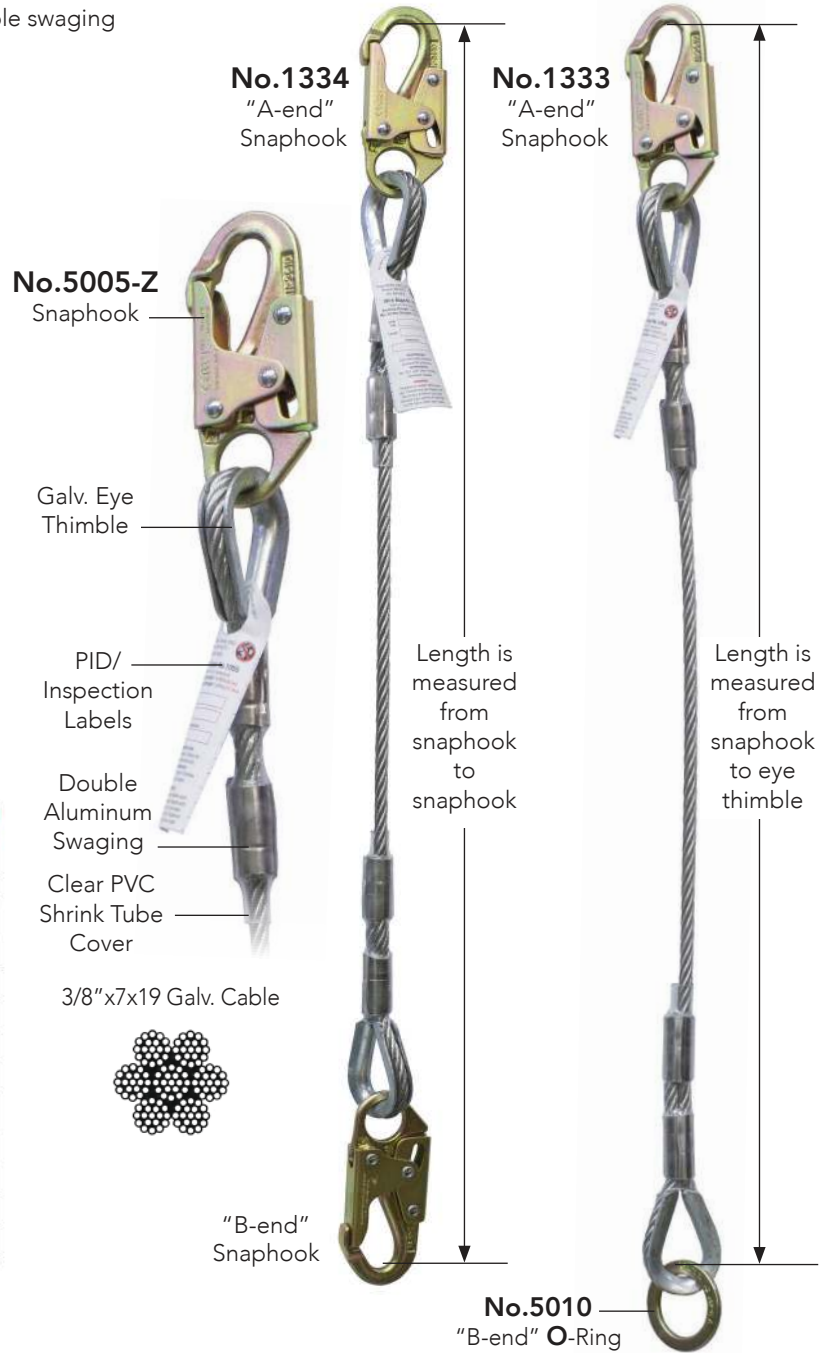

Request Unit Price

Part No.	Length/ft	A-end	B-end	wt/lb
1333-3	3	Snaphook	No.5010 O-Ring	2.6
1333-4	4			2.9
1333-5	5			3.2
1333-6	6			3.5
1333-7	7			3.8
1333-8	8			4.1

Note: For lengths over 8ft use custom wire rope worksheet.

Request Unit Price

Part No.	Length/ft	A-end	B-end	wt/lb
1334-3	3	Snaphook	Snaphook	3.3
1334-4	4			3.6
1334-5	5			3.9
1334-6	6			4.2
1334-7	7			4.5
1334-8	8			4.8

Note: For lengths over 8ft use custom wire rope worksheet.