

RLT-4 HLL 4-Way Field Weld Risers

3.0"od. RLT-4 HLL Field Weld Risers

Specified for HLL end and intermediate anchors field welded to a supporting structure.

Specifications

- Min. tensile strength 5,000lb
- Compatible w/SAS HLL accessories
- Hot dip galvanized (HDG), 304sst or 316sst
- 3rd Party engineering by DH Glabe & Assoc.
Report available on request
- Contact SAS sales team for custom mfg. and lead times

Compliance

ANSI Z359.18-17 Type A/T
CSA Z259.15:22 Type A/T
OSHA 1926.502



Ordering Information

- Order RLT-4 Model Size
- Order CRA 4-Way Top

HLL Intermediate Anchors

- CRA-PT • RPT


RLT-4 Anchor

Field Weld Riser

CRA 4-Way Top

Part Name	Part No.	Type	Loop Top	wt/lb
▲ CRA 4-Way	1054-G	HDG	No.1090 Q235 steel	7
	1054-S	304sst	No.1090-S 316sst	

▲ Stock Part includes attachment bolt pkg. and socket screws.

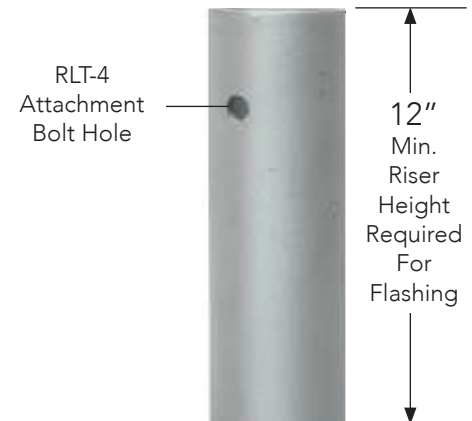

Request Unit Pricing

Riser Height	Part Name	Part No.	Material Type	4-Way Top	Anchor wt/lb	Riser Sch ▲
12	RLT-4-12	1044-4G	■ HDG	1054-G	7	40 0.203 3.0"od.
		1044-4S	■ 304sst	1054-S		
18	RLT-4-18	1045-4G	■ HDG	1054-G	11	80 0.276 3.0"od.
		1045-4S	■ 304sst	1054-S		
24	RLT-4-24	1046-4G	■ HDG	1054-G	15	80 0.276 3.0"od.
		1046-4S	■ 304sst	1054-S		
30	RLT-4-30	1047-4G	■ HDG	1054-G	19	80 0.276 3.0"od.
		1047-4S	■ 304sst	1054-S		
36	RLT-4-36	1048-4G	■ HDG	1054-G	25	80 0.276 3.0"od.
		1048-4S	■ 304sst	1054-S		

■ Standard Design Custom mfg. ▲ Nominal Dimension.

□ Order 4-Way top separately.

Note 1: Max. proof load 2,500lb.

Note 2: If required, foam filling to be provided by contractor after welding.

Bolt Pkg.
1/2" x 4-1/2" 18-8sst
Attachment Bolt w/Lock Nut

Bonded SST Seal Washers

