

## SUPER ANCHOR SAFETY FALL PROTECTION EQUIPMENT

# Swivel-D™ Anchor

### Universal Swiveling Anchor For Temporary or Permanent Fall Protection

The Swivel-D anchor is a fully articulating anchor that rotates 360-degrees and swivels 180-degrees. It can attach to virtually any structure including steel, wood and concrete. It is manufactured with a heavy-duty stainless-steel shackle and a zinc plated 2.0" inside diameter forged steel D-ring. It is a highly durable anchor that can be used for either temporary or permanent installation on the interior or exterior of your building or structure.


This anchor is very universal in it's application as it can be bolted directly to numerous anchors already manufactured by SAS including our CRA Threaded Top Anchors/Risers, D-Plate Anchor, 2x-Member Wood Purlin Anchor, Corrugated Metal Roof Block, Standing Seam Anchor and more.

### Features:

- Permanent or Temporary Installation
- Heavy-Duty Stainless-Steel Shackle & Bushing
- 360-Degree Service Loading
- Numerous Attachment Bolt Options Available
- Bolt onto Wood, Metal or Concrete Surfaces
- Attaches to Numerous SAS Anchor Points
- Supplied with Factory Bolt and Lock Nut
- Retail Packaged for Showroom Sales
- Complies with OSHA & ANSI Standards



Structural Steel



Wood Framing



Wood Beams



Narrow Channel Metal Roofing w/1028-BP1 base plate



CTT Threaded Top



Concrete Installation




Z-Purlin w/No.1028-BP1 base plate



No.1207-SSCA Standing Seam Anchor



No. 1303 Swivel D-Plate Anchor

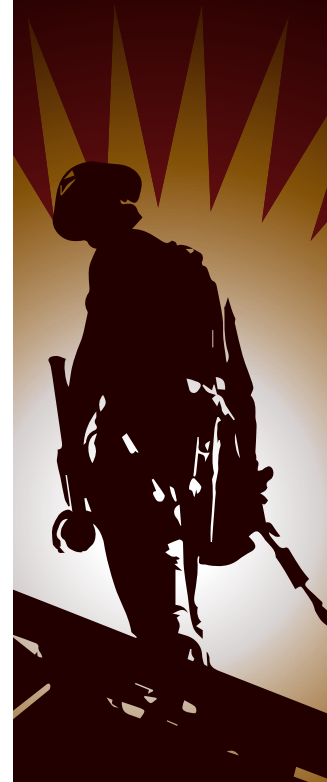

# SUPER ANCHOR SAFETY

FALL PROTECTION EQUIPMENT

17731 147th Street SE Monroe, WA 98272, USA 425 488-8868 www.superanchor.com




## Part Numbers

Part #	Description	UPC	Weight
1028-SMD	Swivel D-Ring Anchor 360-Degree with D-Ring and Stainless Steel Mounting Shackle	786158102802	1.2lb
1028-BP1	Swivel-D Base Plate w/5/8" attachment bolts	786158102933	4lb
1302-2XM	Double 2x wood purlin anchor w/WS-Screws	786518130225	2.2lb

## Technical Specifications

Device	Permanent or Temporary Anchor for Fall Arrest, Work Positioning, HLL Install
Anchor Install Application	Wood, Metal and Concrete Structure
Anchor Weight	1lb
Fall Protection Rating	Fall Arrest, 1 person, 2 person fall arrest with HLL or 3 person fall restraint with HLL
Anchor Service Radius	360-degree
Mounting Hardware	Factory Supplied 5/8" x 2" Grade 8 bolt and lock nut
D-Ring	2.0" I.D. Zinc Plated
Shackle Material	304 Stainless Steel
Structure Attachment	See Instruction Manual
Minimum Breaking	5,000 pounds
4-to-1 Design Load	1,250 pounds
Finish	ASTM 123 or Hot Dip Galvanized (HDG)
Maximum User Weight	310 pounds including tools and equipment
OSHA Standard	1926.502 and 1910.140913)
ANSI Standard	Z359.1-07 and A10.32-2012

## Metal Panel Components

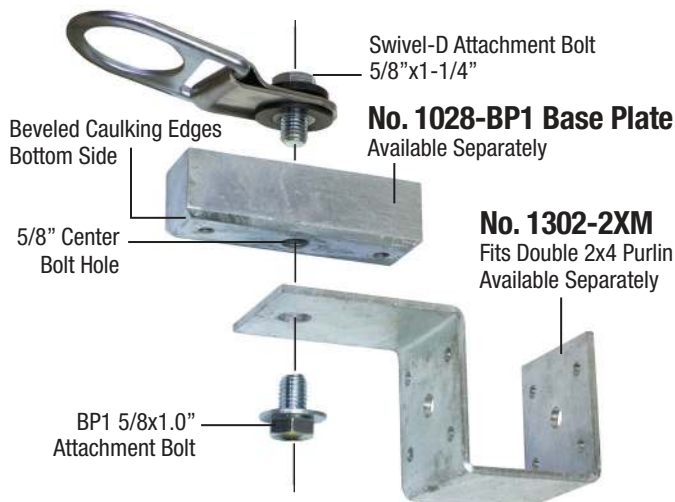

## Retail Package



## Instruction Manual

