




Anchorage Connector

HEIGHT SAFETY. SIMPLIFIED.

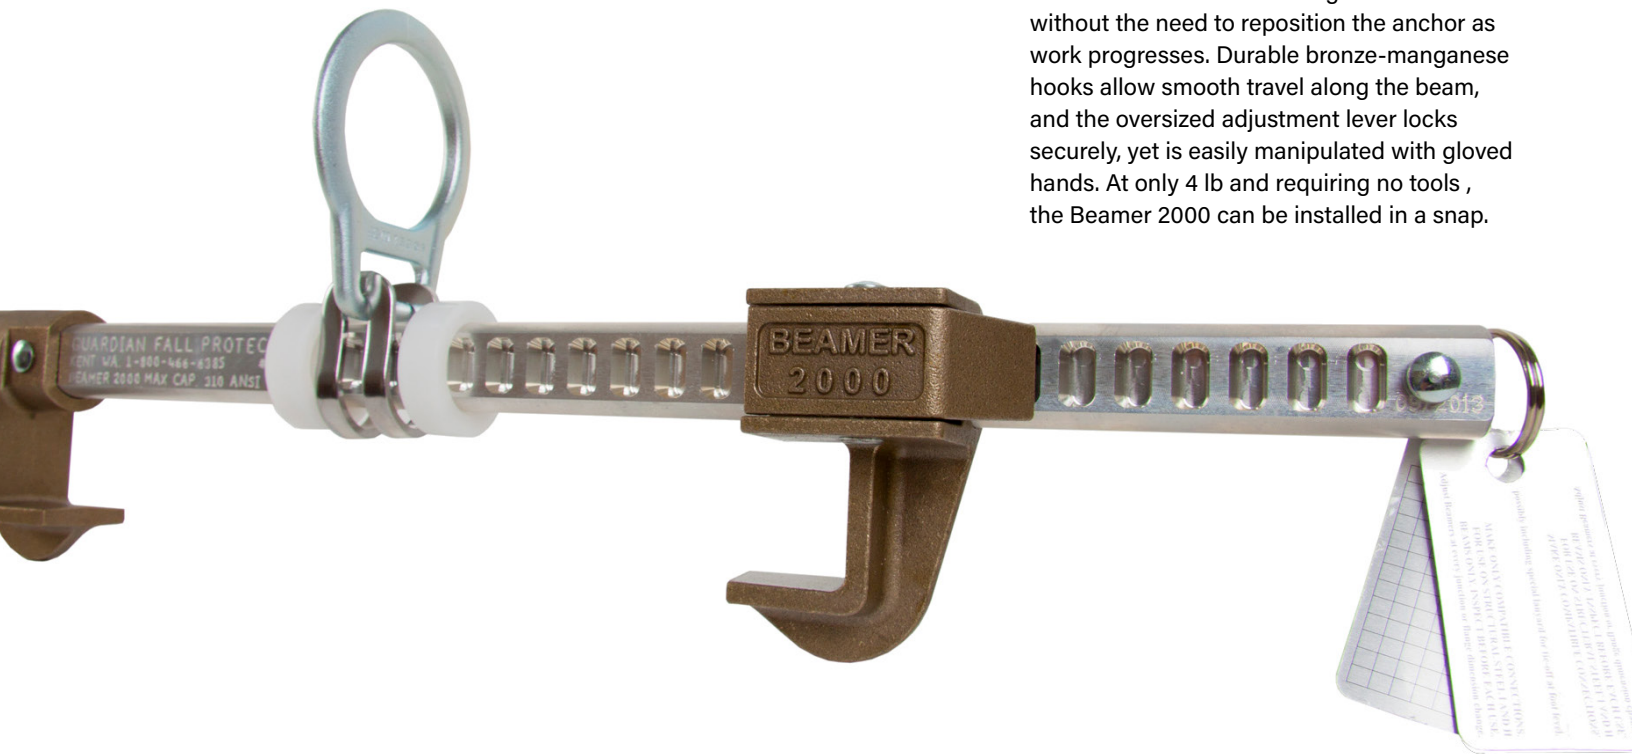

BEAMER® 2000

Anchorage Connector



Key features & benefits

Easy Adjustment

Oversized locking lever offers positive grip and precise adjustment even with gloved hands

Bronze-Manganese Hooks

Long-wearing hooks slide easily along beam and resist slag or other contaminants

Fits Wide Range of Beams

Two models to fit beams widths from 3 ½" to 16" with flanges up to 1 ¼" thick

Nylon Bushings

Enables smooth movement of D-ring along main bar beam and acts as an impact indicator in the event of a fall

Precision Engineered Aluminum Bar

Lightweight and weather resistant construction resists corrosion and repels weld splatter or other contaminants

Pivoting D-ring

Pivots as user works to keep D-ring in optimal orientation

Specifications

User weight range | 100–420 lb

Materials

High Strength Bar | Aluminum

Adjustable Arms | Bronze manganese

D-ring | Drop-forged zinc-plated steel

Internal Springs | Stainless steel


Minimum Breaking Strength | 5,000 lb

Substrates | Steel I or H beams

Installation Type | Temporary

HLL Compatible | No

Anchorage Connector Type (ANSI Z359.18) | A

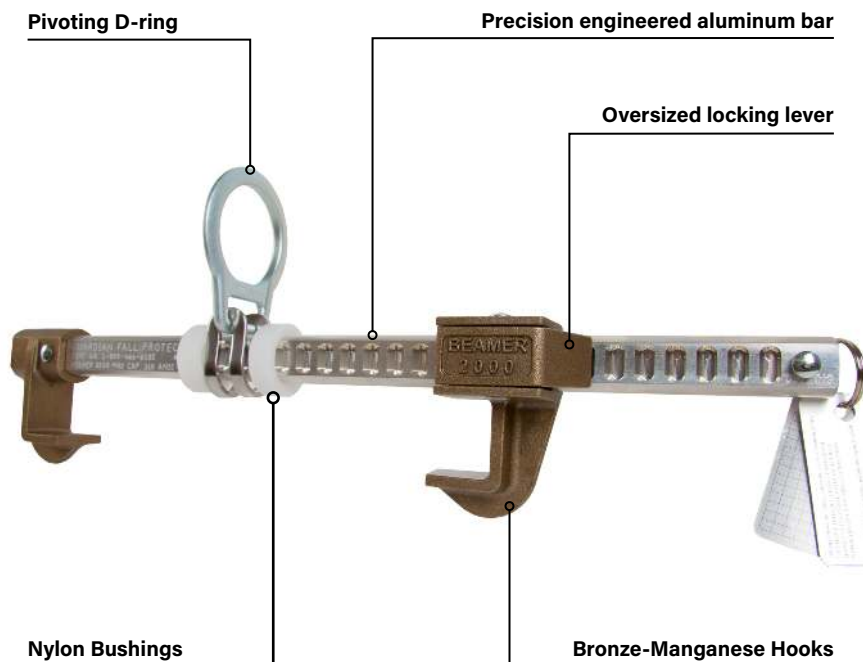

00101

Part numbers

Description

00101	Fits beams 3 ½" – 14" with flanges up to 1 ¼" thick
00103	Fits beams 6" – 16" with flanges up to 1 ¼" thick

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by **ANSI A359.7**

This product is compliant with the following safety regulations and consensus standard:

OSHA 1910.140 & 1926.502 | ANSI Z359.18

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed and
tested in the
United States