



CR5

Personal Self-Retracting Lifeline

The CR5 Class 1 Web SRL-P is part of Guardian's strongest lineup of SRLs in the industry. This lightweight Class 1 personal SRL can be used in a combination of either fall arrest or travel restraint applications.

Class

1

Anchor at or
above dorsal
D-ring

**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



CR5


Personal Self-Retracting Lifeline



Class

1

Anchor at or
above dorsal
D-ring

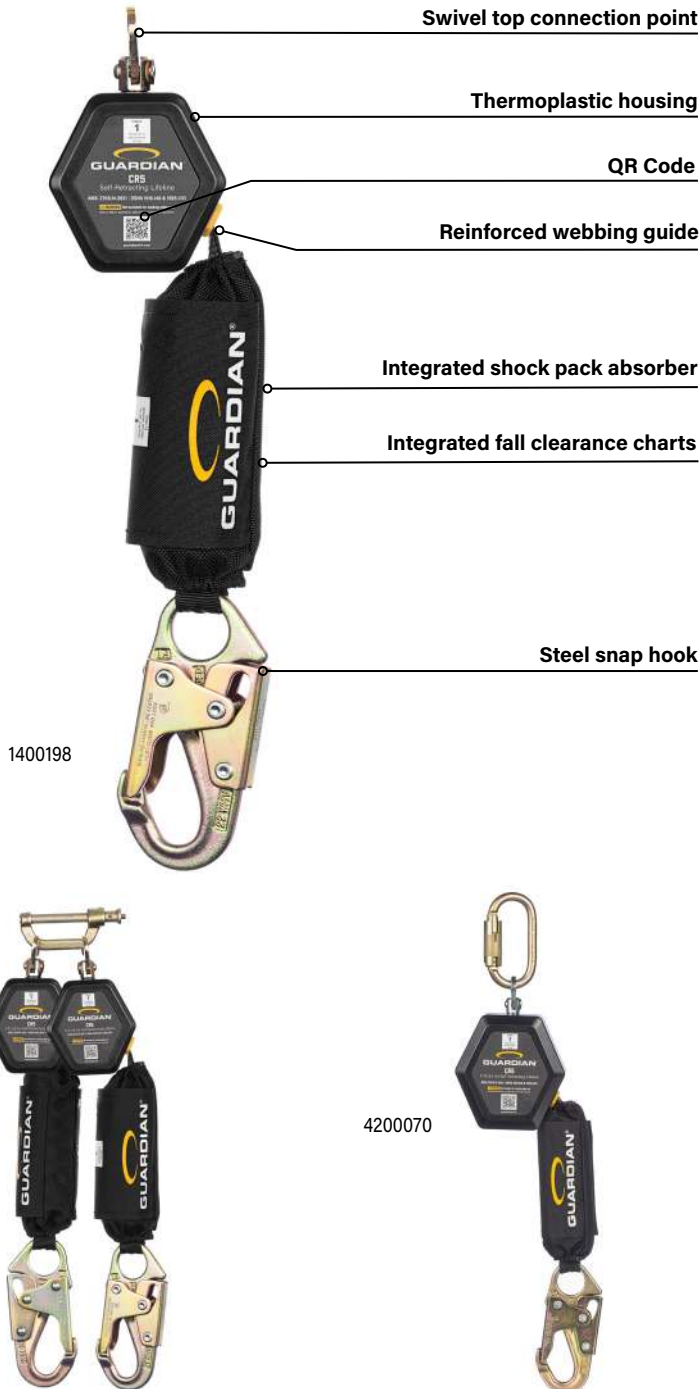

Key features & benefits

Swivel top connection point

Swivels 360-degrees to ensure the device remains in the best orientation during use and also helps prevent lifeline snagging or tangling

Impact modified thermoplastic housing

Super lightweight and durable for long-lasting use in the toughest applications

Digitally enabled labels

QR code for quick and easy access to up-to-date safety and product information

Guardian shock pack cover

Helps increase product longevity and protect safety labeling

Integrated fall clearance charts

Fall clearance charts integrated into shock pack cover for easy access to clearance charts anytime, anywhere

Reinforced webbing guide

Added strength and reduces webbing friction

Multiple hook options available

Choose steel or aluminum snap, rebar, or tie-back hooks depending on job requirements and anchorage type

Specifications

Class 1 SRL (ANSI Z359.14-2021)

Length | 6 ft (1,8 m) and 11 ft (3,3 m)

Average Arrest Force | 1,150 lb (680 kg)

Maximum Arrest Force | 1,350 lb (612 kg)

Maximum Arrest Distance | 3 ft (100-420 lb) | 0,91 m (45-190,5 kg)

Type | SRL-P

Materials | Polyester, Impact Modified Thermoplastic resin, HMPE Webbing, Steel, Aluminum

Hook Options



Steel snap hook



Steel rebar hook



Aluminum snap hook



Aluminum rebar hook

Declaration of conformity

These products been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI/ASSP Z359.7.

This product is compliant with the following safety regulations:
ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502.

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed and
tested in the
United States

CR5

Personal Self-Retracting Lifeline



Class

1

Anchor at or
above dorsal
D-ring

Part number (s)	Description	Hook type	Length	OSHA User Weight Range	ANSI User Weight Range
1400198	CR5 Class 1 Web SRL-P	Steel snap hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400199	CR5 Class 1 Web SRL-P	Steel rebar hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400200	CR5 Class 1 Web SRL-P	Steel tie-back hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400201	CR5 Class 1 Web SRL-P	Aluminum snap hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400202	CR5 Class 1 Web SRL-P	Aluminum rebar hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400203	CR5 Dual Class 1 Web SRL-P	Steel snap hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400204	CR5 Dual Class 1 Web SRL-P	Steel rebar hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400205	CR5 Dual Class 1 Web SRL-P	Steel tie-back hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400206	CR5 Dual Class 1 Web SRL-P	Aluminum snap hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
1400207	CR5 Dual Class 1 Web SRL-P	Aluminum rebar hook	6 ft (1,8 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200070	CR5 Class 1 Web SRL-P	Steel snap hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200071	CR5 Class 1 Web SRL-P	Aluminum snap hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200072	CR5 Class 1 Web SRL-P	Steel rebar hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200073	CR5 Class 1 Web SRL-P	Aluminum rebar hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200075	CR5 Dual Class 1 Web SRL-P	Steel snap hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200076	CR5 Dual Class 1 Web SRL-P	Aluminum snap hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200077	CR5 Dual Class 1 Web SRL-P	Steel rebar hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)
4200078	CR5 Dual Class 1 Web SRL-P	Aluminum rebar hook	11 ft (3,3 m)	100-420 lb (45,3 - 204 kg)	130-310 lb (58,9-140,6 kg)

Declaration of conformity

These products been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI/ASSP Z359.7.

This product is compliant with the following safety regulations:
ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502.

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed and
tested in the
United States