

# FRONTLINE<sup>®</sup>

FALL PROTECTION



[WWW.FRONTLINEFALL.COM](http://WWW.FRONTLINEFALL.COM)

## MEETS OR EXCEEDS STANDARDS

The Frontline product segments are designed and tested to meet or exceed OSHA or ANSI standards, but beyond complying, our products are meant for building the future in a safer and smarter manner.



**OSHA**  
COMPLIANT

**ANSI**  
COMPLIANT



## CATEGORIES

Roofing Systems	6
Anchors	17
Harnesses	37
Lanyards	50
Position Devices	53
Retractable	54
Carabiners	60
Confined Space	61
Temporary Lifelines	67
Fixed Lifelines Systems	70
Rescue Systems	71
Fall Protection for Tools	72
Ladder Accessories	77
Custom Products	78



FRONTLINE  
FALL PROTECTION

FRONTLINE  
FALL PROTECTION

FRONTLINE  
FALL PROTECTION

FRONTLINE  
FALL PROTECTION

The real solutions to face a Fall Hazard of any kind are in the hands of the people closest to the action. Our mission is to ensure that the exposed worker is equipped and ready to drive their performance to a peak while at their frontlines.

Frontline Fall Protection is focused on providing fall protection equipment that responds to the requirements of highly demanding tasks while working at heights. All the Frontline product segments are designed and tested to meet or exceed OSHA and ANSI standards, but beyond complying, our products are meant for building the future in a safer and smarter manner.

# ROOFING SYSTEMS



## COMMANDO TANK NON-PENETRATING FALL PROTECTION CART

CMT04

Frontline Introduces the Commando Tank, the most innovative and revolutionary non-penetrating fall arrest cart in the industry! This OSHA compliant cart powered by solar panels is engineered and designed to enhance safety and efficiency on the jobsites with a user capacity for up to 4 users.

### TOTAL NUMBER OF USERS:

FALL ARREST: 2 | FALL RESTRAINT: 2

DESIGN SPECIFICATIONS	
Color	■ Electrostatic Safety Green
Material	High Strength ASTM Rated Steel
Application	Asphalt, Concrete, TPO & EPDM

## SOLAR MODULE OPTION

CMT04-SLR

### KEY FEATURES:

- **Built-in Impact Sensor:** Activates a 110 dB alarm if a fall occurs with a force exceeding 300 lbs, ensuring immediate alertness to those in the work area.
- **Powerful Directional Lights:** Two high-intensity directional lights, each delivering 4,000 lumens and up to 5 hours of lighting, facilitate safe and efficient work during low-light conditions.
- **Solar Module:** Includes 8 slim designed solar panels that power the recharge batteries that feeds the impact sensor, alarm system and LED lights.



\*SOLAR MODULE  
SETUP IS OPTIONAL.

**HIGH INTENSITY LIGHTS**

Two 4,000-lumen lights provide up to 5 hours of illumination on a full charge in low-light conditions.



SELF SUSTAINABLE SOLAR PANEL SETUP  
SRL-PAN \*Optional



TOOLBOX



WEATHER RESISTANT COVER



BATTERY LEVEL INDICATOR



IMPACT SENSOR ALARM



■ 4 LIFTING POINTS



■ 2 USERS IN FALL ARREST





■ 2 USERS IN FALL RESTRAINT

**SPECS AND COMPLIANCE**

- Weight: ± 1,500 lbs
- Substrates: Concrete, TPO, EPDM, Asphalt
- Compliance: Meets or exceeds OSHA 1910.140 and 1926.502



PATENT PENDING

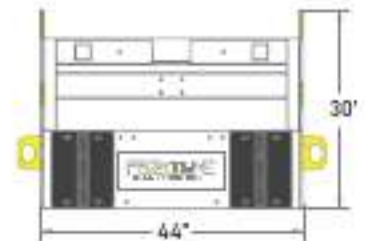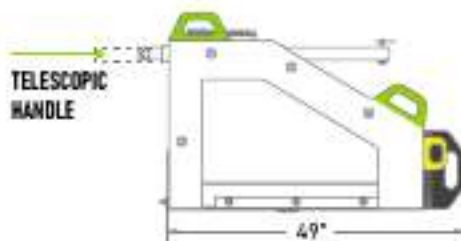

# COMPLETE NON-PENETRATING FALL PREVENTION SYSTEM

The lightest and most innovative fall prevention guardrail system in the market!



### KIT INCLUDES

- 11 Bases
- 10 Guardrails

### AVAILABLE KIT LENGTHS

- GUS10 - 100'
- GUS75 - 75'
- GUS05 - 50'



## IN-HOUSE CUSTOMIZATION



**CUSTOM COLOR  
UPON REQUEST**

Minimum order of 6 kits  
**4-6 WEEK LEAD TIME**

Give your brand visibility by providing a file with your logo and desired color for your guardrails.



## EPDM ERGONOMIC HANDLES

For better product handling

## EPDM SUPPORTS

For better stability

**PATENT PENDING**



**INCLUDES UNIVERSAL  
TOE BOARD SLOTS**

To protect personnel  
in lower levels

1926

1910

**GUARDRAILS 56 LBS BASE**

GUB56



The Frontline base is intended to go with our Guardrail Systems. The Frontline base is lightweight and it's innovative design brings the best in class when installed with our rails and used in conjunction as a fall prevention system.

**KEY FEATURES**

- Bases include 2 extended EPDM supports on both sides for better stability
- Features the lightest base in the market and includes two convenient EPDM handles for better product handling and ergonomics
- Includes two universal toe board slots to protect personnel beneath the system or items from falling out of the top surface

**BASE TOTAL WEIGHT**

**56 lbs**

**PATENT PENDING**

**GUARDRAIL FOR CONCRETE OR STEEL SUBSTRATES**

Frontline features a variety of perimeter edge protection, including non penetrating and fixed solutions for permanent installation. It's manufactured out of high strength ASTM rated steel and painted with safety green or safety yellow electrostatic paint for long lasting durability and added visibility at the workplace.



**GUARDRAIL SECTIONS**

10' GUS10-EA

7.5' GUS75-EA

**GUARDRAIL SYSTEM FOR FIXED APPLICATIONS**

10' GUS10-FXD

7.5' GUS75-FXD

**KEY FEATURES**

- Guardrails are electrostatic painted safety green or safety yellow for added safety and visibility
- System can be easily installed in minutes by drilling onto concrete or bolting onto steel substrates

- The rails slide in perfectly into the base fittings and are secured with two grub screws for best stability and to prevent loose rails

**Available finishes:** ■ Powered Coating | ■ Hot Dip Galvanized



Frontline Guardrail System  
**CAN BE STACKED 4 PALLET HIGH**  
 for better and more efficient transportation

### GUARDRAIL 5' ROLLING SWING GATE

GUG55



The Swing Gate is uniquely designed to slide directly into any of the fittings of Frontline bases. Tighten, adjust accordingly and it's practically ready to use to give safe access and egress to workers using the Frontline guardrail systems!

#### Available finishes:

■ Powered Coating | ■ Hot Dip Galvanized

#### KEY FEATURES

- Swing gate is powder coated safety green or safety yellow for added safety and visibility
- Gate includes support wheel for ease of opening/closing gate
- Comes with built-in pin lock to secure with opposing rail quickly and securely
- Hassle free set-up, just slide into base fitting and tighten grub screws



**TOE BOARD**

GUTO10

Toe Board attachments fit perfectly into the GUS10 guardrail systems. They have end clip to slide right into the bases for a secure and snug fit to ensure nothing falls from the roof or deck onto lower level to protect personnel. It's manufactured out of high strength ASTM rated steel and painted with safety green or safety yellow electrostatic paint for long lasting durability and added visibility at the workplace.

**KEY FEATURES**

- Electrostatic painted safety green or safety yellow for added safety and visibility
- Toe boards can be easily installed in just minutes

- Toe Boards fit perfectly into the base

**Available finishes:**

- Powered Coating | ■ Hot Dip Galvanized



**GUARDRAIL BASE LIFTING DOLLY**

GUBDDO



The Base Dolly is designed to help users move the bases easily and with very little effort! This helps the worker be more productive and helps reduce lifting injuries for better ergonomics when transporting the bases throughout the jobsite or for long distances.

Available colors: ■ Safety Green ■ Safety Yellow

**KEY FEATURES**

- EPDM ergonomic grips for easy transporting and handling
- Flat free tires for long lasting use on all the different substrates
- Made out of quality material featuring ASTM rated steel with electrostatic safety colored paint
- Lightweight so carry it and use it from jobsite to jobsite



**GUARDRAIL ERGONOMIC TRANSPORTATION CART**

GUSCART



Introducing the Guardrail Cart – your ultimate solution for effortless and ergonomic transport of guardrails and bases on the job site. Crafted with innovation, this cart streamlines your workflow by accommodating up to 10 rails and 11 bases simultaneously. Its user-friendly design ensures ease of use, allowing you to navigate through job sites with utmost convenience and in an ergonomic fashion.

Equipped with a spacious auxiliary storage unit, the Guardrail Cart not only transports your materials efficiently but also offers convenient storage for tools and miscellaneous items essential for your tasks.

SCAN QR TO  
WATCH VIDEO



**FRONTLINE SAFETY**  
**GUARDRAIL SYSTEM**



## ROOFING SYSTEMS

### MANHOLE GUARDRAIL

32" X 32" X 42" GUM32

42" X 42" X 42" GUM42



The Manhole Guardrail is used for confined space entries that require a temporary barrier to prevent accidental fall through or to prevent each employee working in the space from foreign objects entering the space as described by OSHA.

### SAFETY GUARDRAIL BOOT BASE WITH HARDWARE INCLUDED

GPB200




#### KEY FEATURES:

- Application: Concrete and Wooden Substrates
- Product Weight: 1.5 lbs

Introducing the patent pending newly redesigned Safety Guardrail Boot Base, the most compact and lightest Guardrail Boot Base in the market! Weighing only 1.5 lbs, our Guardrail Boot Base is versatile and can be used in the different substrates for a secure and safe solution to protect those working at heights!



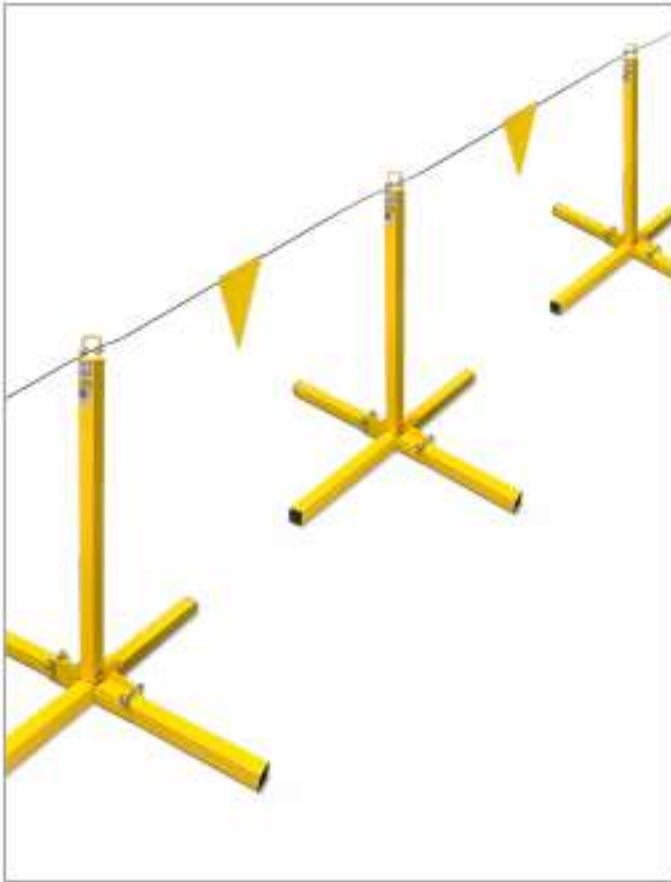

**WARNING LINE SYSTEM**

**WLS16**

The Warning Line System is designed to provide a highly visibility barrier to alert workers of fall hazards on a roof, working in unprotected edges or other general restricted areas.


The Warning Line Systems is powder coated safety yellow made up of a post stanchion, two leg supports with rubber padding to protect the finished substrates and to provide better stability and with a warning line connection point on the top of the stanchion.

**KEY FEATURES**

- Constructed with ASTM rated steel to offer best product quality
- Bottom leg stanchions include rubber padding to protect finished roofs and/or substrates
- Features durable powder-coated safety yellow steel and non-corrosive materials
- Includes pair of stability plates for added product stability and sturdiness

KITS AVAILABLE		KIT COMPONENTS				
						
SKU	LENGTH	WLS16	WLS16-CABLE316	WLS16-FLAG	WLS16-CLIP	WLS16-THIMBLE
WLS16-24	24'	2	24 LNFT	3	6	2
WLS16-96	96'	5	96 LNFT	12	12	4
WLS16-1000	1,000'	43	1,000 LNFT	125	30	10



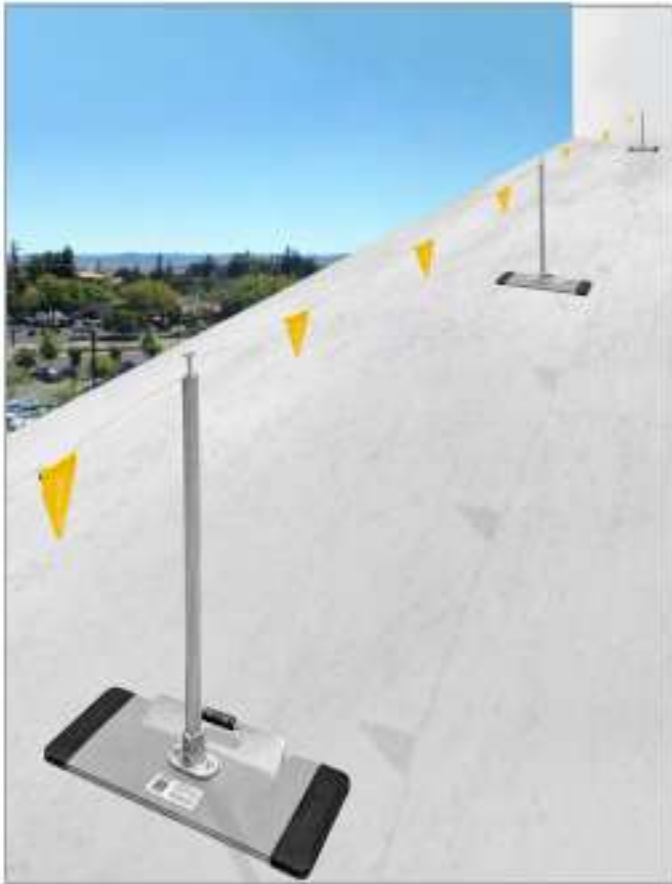

**WARNING LINE SYSTEM WITH BASE AND HANDLE**

**WLS16-BASE**

The Warning Line System is designed to provide a barrier to alert workers of fall hazards on a roof, working in unprotected edges or other general restricted areas. The Frontline warning line system is hot dip galvanized made up of a post stanchion, a base with an ergonomic handle with rubber padding to protect the finished substrates and to provide better stability and with a warning line connection point on the top of the stanchion.

**KEY FEATURES**

- Constructed with ASTM rated steel to offer best product quality
- Bottom leg stanchions include rubber padding to protect finished roofs and/or substrates
- Features durable powder-coated safety yellow steel and non-corrosive materials
- Includes pair of stability plates for added product stability and sturdiness

KITS AVAILABLE		KIT COMPONENTS				
						
SKU	LENGTH	WLS16-BASE	WLS16-CABLE316	WLS16-FLAG	WLS16-CLIP	WLS16-THIMBLE
<b>WLS16-BASE-24</b>	<b>24'</b>	<b>2</b>	<b>24 LNFT</b>	<b>3</b>	<b>6</b>	<b>2</b>
<b>WLS16-BASE-96</b>	<b>96'</b>	<b>5</b>	<b>96 LNFT</b>	<b>12</b>	<b>12</b>	<b>4</b>
<b>WLS16-BASE-1000</b>	<b>1,000'</b>	<b>43</b>	<b>1,000 LNFT</b>	<b>125</b>	<b>30</b>	<b>10</b>



# ANCHORS

## STEEL ANCHORS

Removable and reusable sliding I-beam anchors, easy to place and remove. These anchors are designed to easily glide along the beam while trailing the worker. Its lightweight, but rugged design also makes the beam clamp convenient to transport and a reliable steel anchoring device.

Beam anchor slides conveniently while following the user when relocating work area in the I-beam. Anchor is made up of aluminum components making it lightweight and easy to carry around the work area.

### EASY SLIDER BEAM WALKER ANCHOR

ST14SA



#### COMPONENTS MATERIAL

- Aluminum Cross Bar
- Bronze Clamp
- Stainless Steel D-Ring Bracket
- Zinc Plated Steel D-Ring, Spring, Hardware

The Easy Slider Beam Walker is a removable, single adjustment and reusable sliding I-beam anchor, easy to place and remove. This anchor is designed to easily glide along the beam while trailing the worker.

### EASY SLIDER BEAM WALKER FOR 3.5" - 14" WIDE I-BEAMS

ST14SH



#### COMPONENTS MATERIAL

- Cross Bar: aluminum
- Clamps: bronze
- D-Ring Bracket: stainless Steel
- D-Ring, Spring, Hardware: zinc Plated Steel

### VERTICAL / HORIZONTAL FIXED BEAM CLAMP

ST14V



#### COMPONENTS MATERIAL

- Zinc Plated Steel Swivel D-Ring
- Zinc Plated Steel Support Bar
- Zinc Plated Steel Flange Hooks
- Stainless Steel D-Ring Mount

The Vertical/Horizontal Beam Anchor is a fixed I-beam anchor that is easy to operate and designed to clamp onto a vertical or horizontal I-beam to create a fixed anchor point.

## ANCHORS

### ALUMINUM BEAM TROLLEY ANCHOR FOR 3" - 10" WIDE I-BEAMS

ST10HT



#### COMPONENTS MATERIAL

- Aluminum Cross Bar
- Polyester Webbing
- Zinc Plated Swivel
- Stainless Steel Spring, Hardware
- Aluminum Rollers

The beam trolley anchor is one of our best options when it comes to choosing a trailing beam anchoring device because of its unique rugged but fast moving aluminum rollers feature.

### ALUMINUM BANTAM BEAMER FOR 3.5" - 14" WIDE I-BEAMS

ST14AH



#### COMPONENTS MATERIAL

- Aluminum Cross Bar
- Bronze Clamps
- Stainless Steel D-Ring Bracket
- Zinc Plated Steel D-Ring, Spring, Hardware

D-ring is centered on the anchorage connector for ease of sliding on beam flanges and can be conveniently adjusted from both sides. Suitable for single user connection, the I-beam clamp can be used with either a self retracting lifeline or a shock absorbing lanyard.

### ALUMINUM I-BEAM FIXED ANCHOR

ST18AV



#### COMPONENTS MATERIAL

- Aluminum Hex Bar
- Aluminum Jaws
- Alloy Steel D-ring

The Vertical/Horizontal Beam Anchor is a fixed I-beam anchor that is easy to operate and designed to clamp onto a vertical or horizontal I-beam to create a fixed anchor point.

### ALUMINUM I-BEAM SLIDER ANCHOR

12" WIDE ST12AH

18" WIDE ST18AH



#### COMPONENTS MATERIAL

- Aluminum Hex Bar
- Aluminum Jaws
- Alloy Steel D-ring

The aluminum I-beam slider anchor is easy to place, install and can be quickly removed to go onto the next location. The anchor nylon bushings and ball bearings make it easy for the anchor to slide on the beam flanges while trailing the worker for added safety and productivity.

**WELD-ON ANCHOR**

STW01

**KEY FEATURES**

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Steel Structures
- User Maximum Capacity: 310 lbs

Steel weld-on anchor is your ideal anchor for your on the go weld-on applications. The steel weld-on anchor is small, compact and lightweight virtually fitting in the palm of the users hand!

**2-WAY STANDING SEAM ROOF ANCHOR**

RO2W

**KEY FEATURES**

- Connector Strength: 5,000 lbs.
- User Max Weight Capacity: 310 lbs
- Application: Standing seam roofs

The 2-way anchor is easy and quick to install with minimum use of tools. The lightweight anchor weighs less than 5 lbs and can be easily transported from one anchor location to the next anchor with minimum effort.



# STEEL SWIVELS

The MEGA Swivels anchors are reusable, the bolt can be easily replaced when moving onto the next work area and can be used in vertical, horizontal and overhead applications. It can be used in concrete applications for fall protection, rescue applications, lifting, hoisting, tie-back, etc.

## MEGA SWIVEL 10K STEEL ANCHOR

STM5810K



### KEY FEATURES

- Application: Steel Anchorage
- Tensile Strength: 10,000-lbf/44kN
- Weight 1.4lbs

The Swivel Anchor's incredible strength is due to a heavy gauge heat treated alloy steel, reinforced bridge, D-ring and locking caps. Its patent pending key lock design keeps the D-ring seated and locked into its swivel housing, preventing the steel from spreading outward during heavy loads.

## MEGA SWIVEL 316 STAINLESS STEEL 5K STEEL ANCHOR

STM585K-SS



### KEY FEATURES

- Application: Steel Anchorage
- Stainless steel material, great for exterior use and corrosion resistance
- Tensile Strength: 5,000-lbf/22kN

The steel anchor is reusable, the bolt can be easily replaced when moving onto the next work area and can be used in vertical, horizontal and overhead applications. It can be used in steel applications for fall protection, rescue applications, lifting, hoisting, tie-back, etc.

## MEGA SWIVEL 5K STEEL ANCHOR

STM585K



### KEY FEATURES

- Application: Steel Anchorage
- Tensile Strength: 5,000-lbf/22kN
- Weight 1.2lbs

The steel anchor is reusable, the bolt can be easily replaced when moving onto the next work area and can be used in vertical, horizontal and overhead applications.

**STEEL BOLT THREADED ANCHOR**

STB01



The steel bolt threaded anchor can be installed in most structural steel substrates that withstand the 5,000 lbs of required load

Anchor has been tested for multi-direction loading so you can install and tie-off in multiple directions

Can be installed in just minutes with minimum effort and tools

Anchor is reusable and can be taken from one location to the next

The steel bolt threaded anchor is your ideal anchor for steel applications. The anchor is small, compact and lightweight virtually fitting in the palm of the users hand!

Installs in just minutes and it's bolt-on application its reusable so you can conveniently take from one location to the next. The anchor can be used for anchoring on steel columns, I-beams or other steel structures.

**KEY FEATURES**

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Steel Substrates
- User Maximum Capacity: 310 lbs.



## ANCHORS

### MEGA STMP10K-WO + STM10K-SA MEGA SWIVEL 10K STEEL ANCHOR WITH WELD-ON PUCK

STMP10K-WO + STM10K-SA



#### KEY FEATURES

- Application: Steel Anchorage
- Stainless steel material, great for exterior
- Use and corrosion resistance
- Tensile Strength: 5,000-lbf/22kN

The Swivel Anchor's incredible strength is due to a heavy gauge heat treated alloy steel, reinforced bridge, D-ring, and locking caps. Its patent pending key lock design keeps the D-ring seated and locked into its swivel housing, preventing the steel from spreading outward during heavy loads.

### ALPHA SWIVEL 5K STEEL ANCHOR

STB5K



#### KEY FEATURES

- Static Tensile Strength: 5,000 lbs
- User Maximum Capacity: 310 lbs
- Product Weight: 1.2 lbs
- Application: Steel Anchorage

Introducing the newly designed ALPHA reusable anchors for steel substrates. The ALPHA anchors have a unique and stylish design featuring a 360° swiveling d-ring which also pivots front to back to a complete 180° angle for best user mobility.

## REPLACEMENT BOLTS

### STEEL

The Swivel Anchor comes with one bolt per anchor. The anchor is reusable, but when installing/moving to a new anchoring point the initial bolt which was used has to be replaced with a new bolt.

STM585KR8



MEGA

STM585K-SSRB



MEGA

STM5810KR8



MEGA

STB5K-RB



ALPHA

### ALPHA SWIVEL 5K STEEL ANCHOR WITH WELD-ON PUCK

STWD5K



#### KEY FEATURES

- Static Tensile Strength: 5,000 lbs
- User Maximum Capacity: 310 lbs
- Product Weight: 1.2 lbs
- Application: Weld-on Steel Anchorage

Introducing the newly designed ALPHA reusable anchors for steel substrates. The ALPHA anchors have a unique and stylish design featuring a 360° swiveling d-ring which also pivots front to back to a complete 180° angle for best user mobility.

One of our most popular anchors, this portable easily installed concrete anchorage connector can be used in a variety of fall protection applications. The reusable concrete anchor is easily installed and can be used on vertical or horizontal applications. Its ease of use and functionality helps users install and relocate onto the next anchoring location quickly maintaining a good level of productivity while keeping the upmost safety compliance and user confidence.

- Built tough, rugged and corrosion resistant
- Built to last on the toughest environments
- Compact, lightweight and reusable

## REUSABLE CONCRETE ANCHOR 5K

COB345K



### KEY FEATURES

- Concrete Hole Diameter Install Size: .75"
- Weight: 0.4-lbs
- Breaking Strength: 5,000 lbf / 22kn
- User Maximum Capacity: 310 lbs

## REUSABLE 5K CONCRETE ANCHOR BOLT WITH SWIVELING D-RING

COB345KSV



### KEY FEATURES

- Concrete Hole Diameter Install Size: .75"
- Weight: 0.4-lbs
- Breaking Strength: 5,000 lbf / 22kn
- User Maximum Capacity: 310 lbs

## REUSABLE TOGGLE BOLT CONCRETE ANCHOR 5K

COT345K



### KEY FEATURES

- Concrete Hole Diameter Install Size: .75"
- Weight: 0.4-lbs
- Breaking Strength: 5,000 lbf / 22kn
- User Maximum Capacity: 310 lbs

## REUSABLE CONCRETE ANCHOR 10K

COB110K



### KEY FEATURES

- Concrete Hole Diameter Install Size: 1"
- Weight: 1-lbs
- Breaking Strength: 10,000 lbf / 44kn
- User Maximum Capacity: 310 lbs

## STAINLESS STEEL FLANGE ANCHOR WITH BOLT

COFA01 + COFA01RB



### KEY FEATURES

- Product Net Weight: 0.13 lbs
- Breaking Strength: 5,000 lbs
- Drilling depth of 3.74"
- Easy and quick to install

## ANCHORS

### CONCRETE EMBED ANCHOR STRAP D-RING END

COSR

4' COS04R

6' COS06R



### CONCRETE EMBED ANCHOR STRAP LOOPED END

COSL

4' COS04L

6' COS06L



#### KEY FEATURES

- Made up of 1.73" wide polyester webbing and 4' or 6' in length
- Provided with additional polyester covering to help protect from abrasion

Concrete straps are placed and installed in the perimeter/area of the building during construction at the different floor levels to allow multiple and convenient tie-off points.



**CONCRETE D-RING REUSABLE ANCHOR PLATE**

COP01

**KEY FEATURES**

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Concrete
- User Maximum Capacity: 130-310 lbs
- Easy and quick to install

Specifically designed for anchoring at concrete walls, ceilings, columns, or other concrete structures. The anchor plate is easy, reusable and can be quickly installed and used in horizontal or vertical applications.

**REINFORCEMENT BACK PLATE FOR MEGA SWIVEL**

SWX100N-QPQ-CTS

**KEY FEATURES**

- The Back Plate can be used with Frontline's 5K and 10K Mega Swivel
- The Backer Plate is a 1/4" powder coated steel plate that is 4"x6" with a clearance hole for a 5/8" bol.

The Backer Plate can be used with Frontline's 5K and 10K Mega Swivel. Applications include reinforced cinder block walls, thick concrete walls, industrial air conditioners and chillers, metal structures, and many more.

**SLAB GRABBER SYSTEM FOR CONCRETE SUBSTRATES**

GUC2X4

**KEY FEATURES**

- Weight: 20 lbs
- Fit concrete slabs from 4" upto 28" slabs
- Completely non-penetrating
- Can be installed within minutes

Ideal perimeter edge protection system for workplaces with exposed fall hazards built from concrete substrates. Use the slab grabbers along with 2x4 lumber horizontal rails to make a complete modular fall prevention system to protect buildings.

**Available finishes:**

■ Powered Coating | ■ Hot Dip Galvanized

# CONCRETE SWIVELS

The anchors incorporate a revolutionary swivel ring design that allows a D-ring to rotate 360 degrees as well as flip back and forth at 180 degrees. The Swivel Anchor's incredible strength is due to a heavy gauge heat treated alloy steel, reinforced bridge, D-ring, and locking caps. Its patent pending key lock design keeps the D-ring seated and locked into its swivel housing, preventing the steel from spreading outward during heavy loads.

## ALPHA SWIVEL 5K CONCRETE ANCHOR

COB5K



### KEY FEATURES

- Galvanized Zinc with Yellow Passivation
- Replacement Bolt: COB5K-RB
- Static Tensile Strength: 5,000 lbs
- User Maximum Capacity: 310 lbs

## MEGA SWIVEL 10K CONCRETE ANCHOR

COM3410K



### KEY FEATURES

- Static Tensile Strength: 10,000-lbf/44kN
- User Maximum Capacity: 310 lbs
- Product Weight: 1.4 lbs
- Zinc Plated Steel made

## MEGA SWIVEL 6K CONCRETE ANCHOR

COM345K



### KEY FEATURES

- Static Tensile Strength: 5,000-lbf/22kN
- User Maximum Capacity: 310 lbs
- Product Weight: 1.2 lbs
- Anchor Rotates 360° and pivots 180° side-to-side

## MEGA SWIVEL 5K STAINLESS STEEL CONCRETE ANCHOR

COM345K-SS



### KEY FEATURES

- Application: Concrete Anchorage
- Stainless steel material, great for exterior use and corrosion resistance
- Tensile Strength: 5,000-lbf/22kN
- Weight 1.2lbs

## REPLACEMENT BOLTS

The Swivel Anchor comes with one bolt per anchor. The anchor is reusable, but when installing/moving to a new anchoring point the initial bolt which was used has to be replaced with a new bolt.



### CONCRETE AND STEEL 10K LBS REUSABLE ANCHOR PLATE

COP02-10K



#### KEY FEATURES

- Minimum Breaking Strength: 10,000 lbs
- Application: Concrete or Steel
- User Maximum Capacity: 130-310 lbs

### CONCRETE AND STEEL 10K LBS HDG REUSABLE ANCHOR PLATE - CAL-OSHA

COP02-10K-CAL



#### KEY FEATURES

- Minimum Breaking Strength: 10,000 lbs
- Application: Concrete or Steel
- User Maximum Capacity: 130-310 lbs

Introducing the bolt-on anchor plate, specifically designed for anchoring at concrete walls, ceilings, columns, or other concrete and steel structures. The anchor plate is easy, reusable and can be quickly installed and used in horizontal or vertical applications. It comes with four pre-drilled holes and all concrete anchor bolts are included and ready to use straight out of the bag.

### CONCRETE SWIVELING ANCHOR

COB015W



#### KEY FEATURES

- Minimum Breaking Strength: 5,000 lbs
- Application: Concrete
- User Maximum Capacity: 130-310 lbs

The swiveling anchor incorporates a d-ring design that conveniently allows the d-ring to rotate 360 degrees as well as flip back and forth at 180 degrees. The anchor can be used for anchoring at concrete walls, ceilings, columns, or other concrete structures.

# MULTIPLE PURPOSE ANCHORS

## MULTIFUNCTION 4-WAY ANCHOR

RO4W



### KEY FEATURES

- Minimum Breaking Strength: 5,000 lbs
- User Maximum Capacity: 130-420 lbs
- Application: Metal, wood or concrete structures

The anchor is pre-engineered and designed for metal, wood and concrete applications. The multi-directional anchor is compatible with an extensive use of connecting devices, including self-retracting lifelines, shock absorbing lanyards and vertical and horizontal lifelines.

## WELD/BOLT-ON STEEL AND CONCRETE ANCHOR

SBW01



### KEY FEATURES

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Steel/Concrete Structures
- User Maximum Capacity: 310 lbs

The weld/bolt-on anchor is your ideal multiple purpose anchor for steel and concrete applications. The anchor is small, compact and lightweight virtually fitting in the palm of the users hand!

## WINDOW/DOOR JAMB 50" NON-PENETRATING ANCHOR

WDJ50



### KEY FEATURES

- Adjustable arms, enabling installation on door/window frames of width from 22" to 50"
- User Max Weight Capacity: 310 lbs
- Minimum Breaking Strength : 5,000 lbs / 23kN

The Window/Door Jamb Anchor provides a non-penetrating anchoring point and can be easily installed inside the interior of a building in a door or window opening enabling the most difficult jobs to get done safely and with confidence.

## WIRE ROPE CHOKER ANCHOR

MPW0

4" MPW04

6" MPW06



### KEY FEATURES

- Connector Strength: 5,000 lbs
- Max User Weight: 310 lbs
- Cable Length: 4' or 6'
- Made of high strength 5/16" galvanized steel

The wire rope choker is your ideal anchoring device for a quick, easy and non-penetrating set-up when a suitable beam or wrap around structure is available.



FRONTLINE  
FALL PROTECTION  
PRODUCT REV. NO. : RPV00.2  
MADE ROPE LENGTH : SOFT  
BATCH NO. : 00000000  
SERIAL NO. : 0000  
MONTH & YR OF MFG. : 01/2000

**FRONTLINE**  
FALL PROTECTION

PRODUCT REV. NO. : RPV00.2  
MADE ROPE LENGTH : SOFT  
BATCH NO. : 00000000  
SERIAL NO. : 0000  
MONTH & YR OF MFG. : 01/2000

LEADING  
EDGE

www.frontline.com

## ANCHORS

### DROP THRU ANCHOR ROUND PLATE WITH AIRCRAFT CABLE

DT



- DL602 6" Round Plate with 2' Cable
- DL606 6" Round Plate with 6' Cable
- DL1202 12" Round Plate with 2' Cable
- DL1206 12" Round Plate with 6' Cable

The Drop Thru Anchoring devices are a quick go to solution when presented with an overhead opening on the concrete floors, steel girders, steel grates, and other applications.

### CROSS ARM STRAP WITH REINFORCED WEBBING

MPS

- 3' MPS03
- 4' MPS04
- 6' MPS06
- 12' MPS12
- 20' MPS20
- 30' MPS30



#### KEY FEATURES

- User friendly and easy to install
- Made up of 1.73" wide polyester webbing stitched with 2.5" reinforced webbing on the back for extra abrasion protection

The cross arm straps come in different lengths to accommodate the different structural wrap around settings. It's multipurpose use can be used in conjunction with a variety of structural members.



# ROOF ANCHORS

Our Commercial Anchors are designed for a number of applications such as fall arrest, fall restraint and window washing tiebacks.

These anchors can also be used indoors or outdoors as they are hot dip galvanized in order to withstand the toughest jobsites and the different weather conditions. The commercial anchors are compatible with an extensive use of connecting devices, including self-retracting lifelines, shock absorbing lanyards and vertical and horizontal lifelines.

## CONCRETE ROOF ANCHOR

RC

12" RC12

18" RC18

24" RC24



## CONCRETE ANCHOR BACKER PLATE

RC-BKRPLT



### KEY FEATURES

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Concrete
- User Maximum Capacity: 130-420lbs

## COMMERCIAL ROOF ANCHOR

RO

12" RO12

18" RO18



## MULTIFUNCTION ANCHOR BACKER PLATE

RO-BKRPLT



### KEY FEATURES

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Metal, wood or concrete structures
- User Maximum Capacity: 130-420lbs

## ANCHORS

### ROOF ANCHOR CAL-OSHA COMPLIANT

RO-CAL

12" RO12-CAL

18" RO18-CAL



#### KEY FEATURES

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Metal, wood or concrete structures
- Anchor Height: 12", 18"
- User Maximum Capacity: 130-420lbs

The Commercial Anchors are designed for a number of applications such as fall arrest, fall restraint and window washing tiebacks.

### WELD-ON COMMERCIAL ANCHOR

RW

12" RW12

18" RW18



#### KEY FEATURES

- Minimum Breaking Strength: 5,000-lbf/22kN
- Application: Weld-on to structural steel members
- User Maximum Capacity: 130-420lbs

These anchors can be used indoors or outdoors as they are hot dip galvanized in order to withstand the toughest jobsites and the different weather conditions.

### HINGED STEEL ROOF ANCHOR

ROSU00



#### KEY FEATURES

- Breaking Strength: 5,000 lbs
- Max User Weight: 310 lbs

Hinged steel roof anchor is one of our most convenient and economical roof anchoring solutions. Quick and easy install, just by adjusting to roof pitch and nailing the 8 holes of the steel flaps onto a wooden structural member

### RESIDENTIAL PITCHFAST ROOF ANCHOR

RORS01



#### KEY FEATURES

- Lightweight and easy install in just minutes
- The anchor is suitable for wood frame construction
- Made of ASTM rated steel
- User Maximum Capacity: 310 lbs

Introducing the PitchFast roof anchor. It's an economical and fast way to provide fall protection for existing and new construction residential roofs. It's ready to use straight out of the box, just screw through sheathing to the roof structure and your anchor is practically ready to use.

**PARAPET ADJUSTABLE NON-PENETRATING ANCHOR**

ROP16

**KEY FEATURES**

- Connector Strength: 5,000 lbs.
- User Max Weight Capacity: 310 lbs
- Application: Structural parapet anchoring point

Parapet Anchor can be used in other structural walls that meet the criteria and it can fit parapets or walls up to 15" thick. The anchor is reusable, easy and quick to install with no tools necessary so save time and be more productive while never sacrificing on safety!

**HINGED REUSABLE ROOF ANCHOR**

R001

**KEY FEATURES**

- Hinged to accommodate most roof peaks and flat surfaces
- User Maximum Capacity: 310 lbs
- Anchor is made out of galvanized steel material with forged d-ring

The hinged reusable roof anchor can be easily mounted on structural roof members. The roof anchor can be used either at the roof peaks or surface mounted onto the roof structures.

**BULL RING REUSABLE ROOF ANCHOR**

ROB01

**KEY FEATURES**

- Minimum Breaking Strength: 5,000 lbs
- User Maximum Capacity: 310 lbs
- Application: Wooden structures

Bull Ring anchor is a robust and compact roof anchor for fall arrest, fall restraint or positioning applications. The roof anchor comes with screws included and can be set-up quickly in just minutes straight out of the bag.

**SWIVELING ROOF ANCHOR**

R001SW

**KEY FEATURES**

- 5,000 lbs minimum break strength
- 310 lbs User Capacity
- Reusable temporary anchor

The swiveling roof anchor it's a temporary anchor for one person for structural wooden substrates. The swiveling connection point allows users connector to move easier and help avoid tangles.



### STAINLESS STEEL PERMANENT USE ROOF ANCHOR

ROSU02SS

ROSU01SS



#### KEY FEATURES

- Breaking Strength: 5,000 lbs
- Max User Weight: 310 lbs

It is an economical and practical anchor rated for one person, which when installed on the pitch of the roof the anchor gives you the convenient option to work on either side because of its two d-rings on the anchoring device.

### ROOF WOOD TRUSS ANCHOR

ROWT18



#### KEY FEATURES

- Maximum Breaking Strength: 1,800-lb/8kN
- Maximum Arrest Force: 900-lb/4kN
- User Maximum Capacity: 310lbs

The Wood Truss Anchor can be installed in a variety of structural wood members at a multitude of angles. This roof anchor can be used in new construction or existing structures.

## COUNTERWEIGHT ANCHOR SYSTEM

CO2NN



### KEY FEATURES

- Application: Non-Penetrating Anchor
- Maximum User Capacity: 310 lbs

The counterweight anchor is a non-penetrating anchor system that can be used in roofs or areas where users are exposed to fall hazards. The anchor weight design makes this an ideal fall arrest or restraint system where the use of penetrating a substrate is not required, so it works perfectly on finished roofs or the different substrates.

## ECOANCHOR COUNTERWEIGHT FALL ARREST ANCHOR SYSTEM

CWIWB



### KEY FEATURES

- Empty Weight: 25 lbs
- Water Filled Weight: 882 lbs
- Material: Fire Resistant Neoprene Reinforced with Nylon

The ecoAnchor was invented 2008, to this day it remains a totally unique concept using renewable resources for both manufacture, installation and with an uncompromising safety performance. The ecoAnchor is constructed of a lightweight special natural rubber material that holds the bag in a solid form when filled with water.





# HARNESSES

## ELITE ★

Frontline's Elite™ Series Harness is engineered, designed and built to bring you all the comfort, durability and reliability you can expect from a construction harness!



Available Sizes: S | M/L | XL/2XL

### ELITE™ CONSTRUCTION HARNESS ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

250CTB

#### FEATURES

- Harness shoulder, back and leg pads are all perforated with a mesh covering to give users the best air circulation and breathability
- Retro reflectivity trim around the harness for added visibility when doing work with limited visibility
- Removable Phone and Radio Holder
- Aluminum Quick Connect Buckle
- Aluminum quick adjusters
- Front D-ring

### ELITE™ VEST STYLE HARNESS WITH ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

250VTB



Available Sizes: S | M/L | XL/2XL

### ELITE™ LITE CLIMBING/RESCUE FULL BODY HARNESS WITH ALUMINUM QUICK CONNECT BUCKLES

200RE



Available Sizes: UNI | 2XL/3XL

# PATRIOT Line

Proudly Union Made in the USA, the Frontline Patriot™ line of harnesses brings you the best quality, comfort and all the compliance when working at heights. The Frontline Patriot™ harness features Airflo™ breathable padding made of special designed 3D material. The Airflo™ padding allows air to flow completely through the pad, allowing for unrestricted air flow while retaining its shape and comfort like no other harness in the industry!

### KEY FEATURES

- Includes Airflo™ state of the art design 3D breathable "X" style back/shoulder pad, for better breathability
- Back, waist and leg pads are also of breathable material, giving it more added comfort throughout the harness
- User Capacity: 350 lbs
- Webbing Strength: 6,000 lbs
- Includes quick-connect buckles on chest and leg straps
- Spring-loaded torso adjusters, keeps harness straps secured in place and allows for quick adjustment
- Chest strap includes two retainers of unique design



### PATRIOT™ TOWER CLIMBING HARNESS WITH SEAT SLING, AIRFLO™ AND QUICK CONNECT BUCKLES

350TWQC

### FEATURES

- Features heavy-duty removable tongue buckle waist belt
- Includes seat sling with suspensions d-rings and two accessory hooks on back of waist belt
- Includes front D-ring for work positioning and/or climbing

Available Sizes

UN  
XL/2X



### PATRIOT™ CONSTRUCTION HARNESS WITH AIRFLO™ AND QUICK CONNECT BUCKLES

350CQC



Available Sizes

UN  
XL/2X



### PATRIOT™ VEST STYLE HARNESS WITH AIRFLO™ AND QUICK CONNECT BUCKLES

310VQC



Available Sizes

UN  
XL/2X



Putting a stylish touch on our most popular harnesses, the Combat™ series harness now comes with exciting graphic designs including American style, Camouflaged and Digital Camouflaged for a great esthetic looks while conserving all the safety compliance!

With our graphic style harnesses users stand out, are making it exciting and look great at the workplace or jobsite while still enjoying all the comfort and safety features!

#### KEY FEATURES

- Back, shoulder and waist pads are of moisture wicking material for better breathability
- Includes aluminum quick-connect buckle on chest strap & tongue buckles on leg straps
- Integrated suspension trauma straps
- Convenient reinforced belt and rigid pad supports
- Includes a back web loop attachment
- The harness is the lightest in its kind, as it made up completely of aluminum hardware
- Includes redesigned horizontal leg straps for better user mobility and comfort

### COMBAT™ MEXICAN STYLE FULL BODY HARNESS WITH ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110CTB-MX



Available Sizes S | M/L | XL/2XL



**PERSONALIZE  
YOUR HARNESS**  
WITH YOUR NATIONS' FLAG



LEAD TIME IS APPROXIMATELY  
**4-6 MONTHS**  
UPON ARTWORK APPROVAL

MINIMUM ORDER QUANTITY

**100 UNITS**

### COMBAT™ LITE DIGITAL CAMO FULL BODY HARNESS ALL ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110CTB-DC



Available  
Sizes

S  
M/L  
XL/2X



### COMBAT™ LITE CAMOUFLAGE FULL BODY HARNESS ALL ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110CTB-CF



Available  
Sizes

S  
M/L  
XL/2X



# CONSTRUCTION STYLE HARNESS



## COMBAT™ CONSTRUCTION FULL BODY HARNESS WITH TONGUE BUCKLE LEGS AND TRAUMA STRAPS

100CTB



Available Sizes

- S
- M/L
- XL/2X
- 3X/4X

## COMBAT™ REFLECTIVE CONSTRUCTION FULL BODY HARNESS WITH TONGUE BUCKLE LEGS AND TRAUMA STRAPS

100RCTB



Available Sizes

- S
- M/L
- XL/2X
- 3X/4X

REFLECTIVE TAPES

### KEY FEATURES

- Back, shoulder and waist pads are of moisture wicking material for better breathability
- Features 5-points of adjustability, making the harness fits snug and more comfortable on users

- Convenient reinforced belt and rigid pad supports
- Integrated suspension trauma straps
- Quick-connect buckle on chest strap & tongue buckles on leg straps

## COMBAT™ LITE FULL BODY HARNESS ALL ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110CTB



INCLUDES A WEB LOOP ATTACHMENT

Available Sizes

- S
- M/L
- XL/2X
- 3X/4X

## COMBAT™ CONSTRUCTION STYLE FULL BODY HARNESS WITH TONGUE BUCKLE BELT & LEGS

50CTB



Available Sizes

- S
- M/L
- XL/2X
- 3X/4X

### KEY FEATURES

- Made up completely of aluminum hardware
- Back, shoulder and waist pads are of moisture wicking material for better breathability
- Integrated suspension trauma straps
- Quick-connect buckle on chest strap & tongue buckles on leg straps

### KEY FEATURES

- Back, shoulder and waist pads are of moisture wicking material
- Made up of high tenacity black polyester webbing
- Tongue buckles on leg straps
- Includes elastic loops on all the straps for better adjustment

Frontline's Combat Series harness was developed to deliver performance, durability and reliability for workers across all industries. Made up of safety orange colored high tenacity polyester, helps make the harness potentially more visible and its universal sizing fits most users. The Combat Series is the quick go to economical solution, while never compromising on safety!

## COMBAT™ VEST STYLE HARNESS WITH FRONT SIDE D-RINGS AND SUSPENSION TRAUMA STRAPS

105CFTB

INCLUDES A WEB LOOP ATTACHMENT



Available Sizes

UN  
3X/4X

## COMBAT™ LITE VEST STYLE HARNESS WITH ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110VTB

INCLUDES A WEB LOOP ATTACHMENT



Available Sizes

S  
M/L  
XL/2X  
3X/4X

### KEY FEATURES

- Equipped with side and front d-rings for work positioning
- Back, shoulder and leg pads are of moisture wicking material
- Includes quick-connect buckle on chest & on leg straps
- Harness features integrated suspension trauma straps

### KEY FEATURES

- Includes quick-connect buckle on chest & on leg straps
- Back, shoulder and leg pads are of moisture wicking material
- Made up of high tenacity black polyester webbing
- Comes with 2 lanyard keepers on the shoulder straps
- Harness features integrated suspension trauma straps



## HARNESSES

### COMBAT ECONOMY SERIES FULL BODY HARNESS (UNIVERSAL)

100VMB-UN



Available Size UNIVERSAL

#### KEY FEATURES

- Includes elastic loops on all the straps for better adjustment
- Features high tenacity safety orange polyester webbing
- Equipped with fall indicator on back straps

### COMBAT ECONOMY SERIES FULL BODY HARNESS WITH TONGUE BUCKLE LEGS (UNIVERSAL)

100VTB-UN



Available Size UNIVERSAL

- Comes with dual color scheme for easy differentiation of the shoulder and leg straps
- Harness is of universal sizing, conveniently fitting most users
- User Capacity: 310 lbs

### COMBAT™ ECONOMY SERIES FULL BODY HARNESS WITH TONGUE BUCKLE LEG STRAPS

50VTB



Available Sizes S | M/L | XL/2XL | 3X/4X

#### KEY FEATURES

- Features 5 points of adjustability
- Back and shoulder pads are of moisture wicking material
- Leg straps include tongue buckle straps for fast and easy adjustment

### COMBAT™ ECONOMY SERIES FULL BODY HARNESS WITH TONGUE BUCKLE LEGS (UNI) - 3D RINGS

100VTB-UN-3D



Available Size UNIVERSAL

#### KEY FEATURES

- 5 points of adjustability for a better and more snug fit
- Includes side D-Rings on torso straps for positioning work
- Leg straps include tongue buckle straps
- Includes elastic loops on all the straps for better adjustment

## SUSPENSION TRAUMA STRAPS

ACTR

### KEY FEATURES

- Allows the suspended worker to stand up in his harness to relieve pressure
- Does not hamper with the activity of the worker while at work
- Extremely effective; specially designed to help relieve the negative effects of Suspension Trauma



www.frontlineall.com

**COMBAT**  
HARNESSES

## COMPLETE ROOFERS KITS

### COMBAT™ ROOFER KIT

RK5PTB25 25' LIFELINE

RK5PTB50 50' LIFELINE



#### Economy Full Body Harness

- Leg straps include pass-thru buckles for easy and quick adjustment
  - Harness is of universal sizing
- #### Vertical Lifeline with Rope Grab
- Polysteel rope
  - Diameter of the rope is 5/8"
  - Rope grab comes with a shock pack

#### Hinged Reusable Roof Anchor

- Anchors is made out of galvanized steel material with forged d-ring
- The anchor conveniently comes with the nails, so its ready to install straight out of the bag

#### Polyester Large Duffel storage Bag

### COMBAT™ PLUS ROOFER KIT

RK050V50



#### Economy Full Body Padded Harness

- Back and shoulder pads are of moisture wicking material for better breathability and a more comfortable fit to help reduce user fatigue and heat exhaustion
- Leg straps include pass-thru buckles for easy and quick adjustment
- Harness is of universal sizing

#### Vertical Lifeline with Rope Grab

- Polysteel rope
- Diameter of the rope is 5/8"
- Rope grab comes with a shock pack

#### Hinged Reusable Roof Anchor

- Anchors is made out of galvanized steel material with forged d-ring
- The anchor conveniently comes with the nails, so its ready to install straight out of the bag

#### Polyester Large Duffel storage Bag

# COMBAT™ PREMIUM ROOFER KIT



SKU: RK110V50

## Harness 110VTB

- Extra web loop connection
- Aluminum hardware
- Quick connect chest buckle
- Moisture wicking shoulder padding
- Tongue buckle leg straps
- Universal sizing



## Bag MPBAG50

- Fall Protection for Tools and Storage Vinyl Bag\*
- Weight Capacity: 50 lbs



## Anchor R001

- Hinged and reusable
- Powder coated black
- Nails included



## Integrated TRAUMA STRAPS

### Lifeline System RGSS58ES

- Openable self-tracking rope grab with shockpack
- High strength 50' polysteel rope
- Knot end for added safety



SCAN QR TO  
WATCH VIDEO



\* Tools of MPBAG50 are not included on kit

Introducing the

# COMBAT™ COMPLIANCE GO-TO-WORK KITS

by Frontline Fall Protection.



**K100-62R**

Combat™ Compliance Kit - Harness, 6' Double Rebar Hook Leg Lanyard and Drawstring Bag

The Combat™ compliance go-to-work kits are your

**CONVENIENT AND ECONOMICAL FALL PROTECTION SOLUTION,**

while never compromising on safety!

## HARNESS + BAG + CONNECTOR



**K100-61S**

Combat™ Compliance Kit - Harness, 6' Single Snaphook Leg Lanyard and Drawstring Bag



**K100-RPW061S**

Combat™ Compliance Kit - Harness, 6' SRL and Drawstring Bag

**READY TO USE STRAIGHT OUT OF THE BAG!**



RED, WHITE, AND BLUE:  
OUR LATEST LINE IS HERE!

# AMERICAN STYLE

A premium line of harnesses, lifelines, lanyards, anchors, and roofer kits, all branded with the American flag.



## COMBAT™ AMERICAN STYLE COMPLETE ROOFERS KIT WITH 50' VLL

RK5PTB50-AM



### American Style Economy Full Body Harness

- Leg straps are provided with tongue buckle straps for easy adjustment
- Universal sizing, fitting most users
- Meets or exceeds ANSI and OSHA applicable standards

### American Style Vertical Lifeline with Rope Grab

- 50' polysteel rope
- Diameter of the rope is 5/8"
- Rope grab comes with a shock pack

### Hinged Reusable Roof Anchor

- Made up of high strength galvanized steel
- Features a finished powder coating
- The anchor comes with the nails, so its ready to install straight out of the bag

### American Style Polyester Large Duffel storage Bag

Take your roofing projects to the next level with the new Combat™ Complete Roofers Kit series, featuring American-inspired designs that blend style and safety. These top-selling kits are a ready-to-use solution, packed with essential safety gear for a variety of applications. With the Combat™ Roofers Kit, you can work confidently, knowing each kit is designed for reliability and meets all safety standards needed for roofing and similar jobs. Elevate your performance and safety with Combat™ Roofers Kit—everything you need, straight out of the bag!

## AMERICAN STYLE

### COMBAT™ AMERICAN STYLE COMPLIANCE KIT - HARNESS, 6' SINGLE LEG LANYARD AND DRAWSTRING BAG

K100-61S-AM



#### Harness Features:

- 5 points of adjustability for a better and more snug fit
- Leg straps include tongue buckle straps for easy and quick adjustment
- Includes elastic loops on all the straps for better adjustment
- Equipped with fall indicator on back straps
- Harness is of universal sizing, conveniently fitting most users
- Harness comes conveniently packaged with lanyard in Frontline adjustable drawstring bag

#### Lanyard Features:

- 6' free fall shock absorption lanyard
- Made of high-tenacity polyester in American blue with white stitching for easy inspection and enhanced visibility
- Single leg type lanyard with snap hook ends
- Lightweight and extremely durable
- Impact indicators provide visual display when subject to a fall event occurrence
- Internal shock absorbing design limits the fall forces to 900 lbs or less

### FRONTLINE 110CTB-AM AMERICAN STYLE FULL BODY HARNESS WITH ALUMINUM HARDWARE AND SUSPENSION TRAUMA STRAPS

110CTB-AM



Putting a stylish touch on our most popular harnesses, the Combat™ series harness now comes with exciting graphic designs including American style, Camouflaged and Digital Camouflaged for a great esthetic looks while conserving all the safety compliance!

The graphic style harnesses are made up of all aluminum hardware making it extremely lightweight but built rugged in order to withstand the harshest conditions, while also featuring built in suspension trauma straps for added safety in case user is subject to a fall. It's newly redesign also features horizontal leg straps, giving the user better mobility and comfort.

#### KEY FEATURES

- Harness features integrated suspension trauma straps
- Aluminum quick-connect buckle on chest strap & tongue buckles on leg straps for fast and easy adjustment
- Harness includes a back web loop attachment
- Convenient reinforced belt and rigid pad supports tool belts without harness falling or sagging

Available Sizes S | M/L | XL/2XL

**COMBAT™ AMERICAN STYLE VEST HARNESS**

110VTB-AM



Available Sizes S | M/L | XL/2XL

**COMBAT™ AMERICAN STYLE ECONOMY SERIES FULL BODY HARNESS WITH TONGUE BUCKLE LEGS (UNI)**

100VTB-UN-AM



Available Size UNIVERSAL

**AMERICAN STYLE POLYESTER LARGE DUFFEL STORAGE BAG**

RKBAG-AM



**VERTICAL LIFELINE WITH 12" SHOCK ABSORBING LANYARD AND MANUAL ROPE GRAB (50')**

VLP50R3L-AM



**AMERICAN STYLE POLYESTER ADJUSTABLE DRAWSTRING BAG**

HKBAG-AM



**COMBAT™ AMERICAN STYLE SINGLE LEG 6' SNAPHOOK LANYARD WITH INTERNAL SHOCK ABSORBER**

LIS61S-AM



# LANYARDS

## ELITE™ ELASTIC TWIN LEG 6' ALUMINUM REBAR HOOK LANYARD

LIS62RA



# ELITE

### KEY FEATURES

- 6 ft free fall shock absorption
- Single leg with snaphook ends
- Lightweight and extremely durable
- Impact indicators provide visual display when subject to a fall event occurrence

## PATRIOT Line

Our Patriot™ Shock Absorbing Lanyards are your ideal lanyards when working at heights! The high strength 8,500 lbs tubular polyester webbing rated lanyards reduce the possibilities of serious injuries by limiting fall forces to less than 900 lbs. The lanyards also feature elasticated properties offering reduced relaxed lanyard length to help avoid tripping hazards and keeping lanyards from dragging off the floor. Take them from job to job, the Patriot™ Shock Absorbing Lanyards are built tough and built to last!

## PATRIOT™ SINGLE LEG ELASTIC LANYARD WITH SNAPHOOKS

LES61S-US



### KEY FEATURES

- Elastic properties, 4.5' in relaxed length and 6' in stretched length
- Elasticated lanyards help avoid tripping hazards for added user safety
- Shock absorber design limits the fall forces to 900 lbs or less

## PATRIOT™ DOUBLE LEG ELASTIC LANYARD WITH REBAR HOOK ENDS

LES62R-US



### KEY FEATURES

- Elastic properties, 4.5' in relaxed length and 6' in stretched length
- Elasticated lanyards help avoid tripping hazards for added user safety
- Twin leg lanyard allows user to connect on either end, allowing for 100% tie-off

Frontline's Combat Series Shock Absorbing Lanyards were developed to deliver performance, durability and reliability for the workers across all industries. Made up of high strength polyester, these lanyards feature an internal shock absorber avoiding an external shock pack and making it a lightweight design. Frontline's Combat Series is the quick go to economical solution, while never compromising on safety!

### COMBAT SINGLE LEG 6' LANYARD WITH INTERNAL SHOCK ABSORBER

LIS61S

Snaphooks



LIS61R

Rebar Hook



### COMBAT TWIN LEG 6' LANYARD WITH INTERNAL SHOCK ABSORBER

LIS62S

Snaphooks



LIS62R

Rebar Hooks



#### KEY FEATURES

- 6 ft free fall shock absorption
- Lightweight and extremely durable
- Impact indicators provide visual display when subject to a fall event occurrence
- Internal shock absorbing design limits the fall forces to 900 lbs or less

#### KEY FEATURES

- 6 ft free fall shock absorption
- Twin leg lanyard allow users to connect on either end, allowing for 100% tie-off
- Impact indicators provide visual display when subject to a fall event occurrence
- Internal shock absorbing design limits the fall forces to 900 lbs or less

## LANYARDS

### COMBAT™ & TIE-BACK DOUBLE LEG SHOCK ABSORBING LANYARD

LP062SADJ

Snaphooks



Made up of high strength polyester, these lanyards feature an external shock pack making easy to inspect if subject to a fall and include convenient adjustable functionality to help users from being subject from reaching a fall hazard.

LP062RADJ

Rebar Hooks



#### KEY FEATURES

- 6' length and adjustable down to 4' in length
- Lanyard has one d-ring on each leg rated for tie-back applications onto structural members rated 5,000 lbs or above
- Twin leg lanyard allow users to connect on either end, allowing for 100% tie-off

### 3' SINGLE LEG SNAPHOOK LANYARD WITH INTERNAL SHOCK ABSORBER

LIS315



#### KEY FEATURES

- Made of 1.18" wide high-tenacity polyester webbing
- Provided with double locking snaphook for making the connection Ideal for extending dorsal d-ring for easy connection

### D-RING 18" EXTENSION LANYARD

ACEL18S



#### KEY FEATURES

- Made of 1.18" wide high-tenacity polyester webbing
- Provided with double locking snaphook for making the connection Ideal for extending dorsal d-ring for easy connection

Made up of high strength polyester, these lanyards feature an internal shock absorber avoiding an external shock pack and making it a lightweight design. Frontline's Combat Series is the quick go to economical solution, while never compromising on safety!

# POSITIONING DEVICES

## REBAR POSITIONING CHAIN ASSEMBLY WITH SWIVEL

PSSW2R



### KEY FEATURES

- Lightweight, while incorporating a high tensile strength for maximum durability
- Perfect for work positioning
- Rebar hook ends
- Swiveling hooks for better user positioning



## COMBAT™ 6' POSITIONING ADJUSTABLE RESTRAINT LANYARD COMBAT

LPO61SADJ



### KEY FEATURES

- 6' length and adjustable down up to 4' in length
- Single leg with snaphook ends
- Lightweight and extremely durable
- User Capacity 310 lbs

Made up of high strength polyester, these lanyards feature convenient adjustable functionality to keep users from being subject from reaching a fall hazard.

## PATRIOT™ POSITIONING CHAIN WITH SWIVELING HOOK

PSSW2R-US



### KEY FEATURES

- Includes galvanized steel swiveling link
- Zinc chromate plated forged alloy steel double locking snaphooks and rebar hook
- Both snaphooks and rebar hook 100% proof load tested for quality and performance assurance

# RETRACTABLES

## SEALED BLOCK STAINLESS STEEL SELF RETRACTING LIFELINE

50' RSBC50

80' RSBC80

Introducing our advanced line of IP68 rated SRL Sealed Blocks, engineered specifically for deployment in the toughest and most demanding environments. Designed to withstand the rigors of the oil and gas industry and offshore applications, these heavy-duty blocks feature a robust stainless steel sealed construction that effectively protects critical internal components from exposure to dirt, grease, water, and hazardous chemicals.

### KEY FEATURES

- Robust Sealed Design
- Maximum Contamination Protection
- Durable Stainless Steel Housing
- Innovative Pivoting Anchorage Loop
- Stainless Steel Swivel Snap Hook
- Impact Indicator



## ELITE TWO PERSON 60' TEMPORARY HORIZONTAL LIFELINE SYSTEM

60' HCLL260

Introducing the Frontline Elite 2-Person Horizontal Lifeline System, one of the most advanced systems in the industry! This innovative system features a 7x19 galvanized steel wire cable equipped with a uniquely integrated tension indicator and a built-in winch system. It includes two high-strength alloy steel o-ring mobile anchors, ensuring secure and reliable connection points.

### KEY FEATURES

- Constructed from durable and high-strength polymer, making the system both lightweight and portable allowing for easy transporting and versatility
- The retractable lifeline design simplifies installation
- Includes a convenient molded handle, this facilitates easy carrying and better ergonomics
- System includes a termination connection end that allows for straightforward and easy connection to the different anchoring points



# CABLE

## CABLE SINGLE LEG SRL WITH STEEL SNAP HOOK END

RPG

The Self Retracting Lifelines are your go to solution when working at heights, and a quick safety reaction is of the utmost importance! Engineered to perform and engage within seconds if subject to a fall, SRL's help limit free fall distances and lessen the impacts generated on the body for a safer working experience.

### KEY FEATURES

- Galvanized steel wire cable lanyard.
- Casing is made of high impact strength polymer to prevent breakage and is nearly indestructible.
- Swivel anchorage eye and snaphook with impact indicator at the attachment end.



10' RPG10

20' RPG20

30' RPG30

50' RPG50

70' RPG70

## CABLE SINGLE LEG SRL WITH STEEL SNAPHOOK END WITH ERGONOMIC CARRY ON HANDLE AND TAGLINE

RPGC

### KEY FEATURES

- The SRL is of high strength, corrosion resistant components making its performance highly dependable
- Includes internal energy absorption system and quick-action breaking system
- SRL includes a swivel anchorage eye with self-locking carabiner on the housing and snaphook with impact indicator at the lifeline end
- Tagline included for SRL attachment when at height, and to bring down lifeline access to work area safely



30' RPGC30

50' RPGC50

# TIE BACK

## TIE BACK SINGLE LEG WEB 9FT SRL WITH TIE BACK HOOK END - TIE BACK TWIN LEG WEB 9FT SRL WITH TIE BACK HOOK ENDS

RPA0TB

### KEY FEATURES

- Tie-Back: Can be used to tie-off directly to anchoring devices or directly to the structure when suitable structure anchor is available.
- Extremely light in weight and compact, so it's easily carried and helps reduce user fatigue.
- The SRL lifeline is of Aramid fiber webbing with UHMWPE (Ultra-high-molecular-weight polyethylene) material, making the webbing lightweight with extreme high impact strength features.
- Can be used as a single or double SRL retractable with the mono/twin connector.



RPA091TB SINGLE RPA092TB TWIN

# LEADING EDGE

Are you working near or around falls that may occur over edges such as roofing, leading edges, steel applications, at foot level tie-offs 90 degrees or higher or other similar applications? Then the Frontline Leading Edge Series are your go to solution in order to provide the best protection when exposed to such fall hazards.

## LEADING EDGE CABLE 8FT SRL

### KEY FEATURES

- SRL Can be used for sharp and smooth edges.
- Lightweight and compact.
- Quick-action braking system with swivel top with side lifeline exit.
- It's Thermoplastic Housing is extremely rugged.



8' RPG081RLE 8' RPG082RLE 8' RPG081SLE 8' RPG082SLE

Steel Rebar Hook Steel Snaphook

### LEADING EDGE CABLE SINGLE LEG SRL WITH STEEL SNAPHOOK END

RPGLE

25' RPG25LE

50' RPG50LE

#### KEY FEATURES

- Retractable Lifelines particularly meant for providing protection to the user when working horizontally near sharp edges.
- Equipped with an external shock pack (with protective cover) which reduces the dynamic load impact felt on the user in the event of a fall.
- Diameter of Leading Edge wire cable 7/32"



### LEADING EDGE CABLE SINGLE LEG SRL WITH STEEL SNAPHOOK END WITH CARRY ON HANDLE AND TAGLINE

RPGCLE

30' RPGC30LE

50' RPGC50LE

65' RPGC65LE

#### KEY FEATURES

- Leading edge application: SRL
- Can be used for sharp and smooth edges
- The integral shock absorber helps keep the lifeline intact when subject to a fall over an edge
- Features a rubber (TPV) ergonomic handle for easy transportation and better user ergonomics



# WEBBING

The Self Retracting Lifelines are your go to solution when working at heights, and a quick safety reaction is of the utmost importance! Engineered to perform and engage within seconds if subject to a fall, SRL's help limit free fall distances and lessen the impacts generated on the body for a safer working experience.

### KEY FEATURES

- Webbing provides continuous fall protection without any obstacles keeping the lifeline out of worker's way
- It's lightweight and compact features avoid putting heavy weight on users back
- The SRL lifeline is of high strength polyester material, making the webbing lightweight with extreme high impact strength features
- Features a quick-action braking system with swivel top carabiner
- Made up of finest material for longevity and extended use
- It's thermoplastic housing is extremely rugged, making the SRL durable and a reliable



11' RPW11  
Steel Snaphook



20' RPW20  
Steel Snaphook



20' RPW20R  
Steel Rebar Hook



6' RPW061S  
Steel Snaphook



6' RPA061S  
12' RPA12S  
Steel Snaphook



6' RPW061R  
Steel Rebar Hook



6' RPW062R  
TWIN  
Steel Rebar Hooks



6' RPA062R  
TWIN  
Steel Rebar Hooks



6' RPA061R  
12' RPA12R  
Steel Rebar Hook

**ARAMID TWIN FIBER WEB 6' SRL WITH ALUMINUM REBAR HOOK ENDS**

RPA062RA

**KEY FEATURES**

- Hook Type: Aluminum Rebar Hooks
- User Max Weight Capacity: 310 lbs
- Lifeline Length: 6'

**ARAMID TWIN FIBER WEB SINGLE LEG 6' SRL WITH STEEL SNAP HOOK ENDS**

RPA062S

**KEY FEATURES**

- Hook Type: Steel Snap Hooks
- User Max Weight Capacity: 310 lbs
- Lifeline Length: 6'



# CARABINERS

## DUAL CONNECTOR CARABINER FOR TWIN SRL'S

CSQ275



### KEY FEATURES

- Net weight: 0.46 lbs ± 0.02 lbs
- Minimum Breaking Strength: 5,000 lbs
- Gate Strength: 3,600 lbs

## STEEL QUARTER TURN-LOCKING CARABINER

CSQ184



### KEY FEATURES

- Minimum Breaking Strength: 9000 lbs
- Gate Strength: 3600 lbs
- Material: High Strength Alloy Steel
- Finish: Galvanized with Golden Yellow/Silver passivation

## LARGE STEEL QUARTER TURN-LOCKING CARABINER HOOK

CSQ120



### KEY FEATURES

- Net Weight: 1.65 lbs ± 0.02 lbs
- Minimum Breaking Strength: 5,000 lbs
- Gate Strength: 3,600 lbs

## ALUMINUM QUARTER TURN LOCKING CARABINER

CAQ117



### KEY FEATURES

- Net Weight: 0.22lbs ± 0.02 lbs
- Minimum Breaking Strength: 5,000 lbs
- Gate Strength: 3,600 lbs

# CONFINED SPACE

## MEGAPODS

The MEGApod, in conjunction with a winch or 3-Way is the correct equipment to help you perform those non-entry rescue operations and bring workers back to safety when the situation calls for it.

### KEY FEATURES

- The tripod is made from aluminum material, hence extremely lightweight and portable
- Includes 2 auxiliary eye bolts for easy overhead anchorage
- Inner and outer adjustment can be achieved by sliding telescope legs
- The double pulley system is permanently incorporated in the cast aluminum head of the MEGApod & provides independent passing over of cable for winch and retrieval device
- Includes convenient MEGApod storage and carry bag

### MEGAPOD ALUMINUM TRIPOD

7' TAN07    10' TAN10



### MEGAPOD ALUMINUM TRIPOD WITH WINCH KIT

7' TAN07RU    10' TAN10RU



### MEGAPOD ALUMINUM TRIPOD WITH WINCH AND 3-WAY KIT

7' TAN07RURP    10' TAN10RURP



### 60' 3-WAY SELF RETRACTABLE LIFELINE WITH RETRIEVAL SYSTEM

RPG603W



#### KEY FEATURES

- Retractable mode - Enables easy movement of user
- Winch mode - Enables easy retrieval of the victim post fall arrest
- Includes swiveling steel snaphook as a connector for better mobility and user harness connection

### UNIVERSAL BRACKET FOR ALL RETRIEVAL SRL'S

TACBU



#### KEY FEATURES

- Material: Alloy Steel
- Finish: ED Coated Black
- Weight: 10.5 lbs

### 60' CONFINED SPACE WINCH WITH GALVANIZED STEEL CABLE

RUW60



#### KEY FEATURES

- Includes mounting plate having four bolts for mounting to MEGApod leg
- Comes with rugged and long-lasting galvanized steel wire rope of 3/16" diameter
- Includes swiveling steel snaphook as a connector for better mobility and user harness connection
- Use: Material/Personnel Lowering and Lifting
- Rescue Winch
- Lifeline Length: 60'
- Inbuilt Shock Absorption: Yes
- Maximum Lifting Load Capacity: 310 lbs.

Whether working on a permit or non-permit confined space application, the galvanized steel cable winch can be used to lower personnel to their specific work area and it can be used to quickly retrieving personnel when exposed to a hazardous situation back to safety.



mobile mini

mobile mini

WILLSCOT 800.782.1111

P CAUTION  
AHS Staff  
Working Only

# PATRIOT Line

The Patriot™ Quadpod comes ideal for situations where the use of a tripod is either impractical or impossible. The Quadpod system includes four adjustable legs for better stability and a 360° rotating boom to easily position the fall arrest and rescue point over the confined space entry making it unique and different over other confined space equipment.

QAN75-US

**PATRIOT™ QUADPOD WITH 3-WAY RETRIEVAL SYSTEM**

QAN75RA-US

**PATRIOT™ QUADPOD CONFINED SPACE SYSTEM**

### KEY FEATURES

- The Quadpod is easily set-up in just a matter of seconds, no tools required and can be done by one person
- System is collapsible and each leg is independently adjustable to compensate for uneven terrain
- The removable boom rotates 360° and locks in any position allowing easy positioning over confined space entry



PATRIOT™ 3-WAY RETRIEVAL



**PATRIOT™ 50' 3-WAY RETRIEVAL & SRL**

RAG503W-US



**PATRIOT PULLEY FOR TRIPODS**

PUS34-US



### KEY FEATURES

- Personnel 3-Way serves to lower, raise, rescue personnel
- The Patriot™ model has two independent braking systems
- Comes with 3/16" diameter galvanized steel cable with locking swivel snaphook with impact indicator

The Patriot™ stainless steel pulley is designed and made to be used with the Patriot™ Confined Space Tripod. Carabiner should also be purchased to connect the pulley into the tripod eyebolt and then feed the 3-Way SRL cable.

TAN07-US **PATRIOT™ 7' CONFINED SPACE ALUMINUM TRIPOD**

TAN07RA-US **PATRIOT™ 7' CONFINED SPACE TRIPOD WITH 3-WAY RETRIEVAL SYSTEM**



**PATRIOT™ 3-WAY RETRIEVAL**



**KEY FEATURES**

- Tripod can be easily set-up
- Cast aluminum tripod head comes complete with two integrated locking snaphooks for attachment of pulleys or auxiliary equipment
- Each of the tripod's legs may be independently adjusted

The Patriot™ Tripod is made up of highly durable aluminum material, has adjustable legs to fit the desired height and includes anti-skid resistant rubber legs with reinforced chains to withstand the toughest conditions. The Patriot™ tripod should be used with the Patriot™ 3-Way Retrieval to act as a complete fall arrest and rescue system for confined spaces.

DAN75-US **DAVIT CONFINED SPACE SYSTEM**

DAN75RA-US **DAVIT WITH 50' 3-WAY RETRIEVAL SYSTEM**



**PATRIOT™ 3-WAY RETRIEVAL**



**KEY FEATURES**

- The Davit system can be easily set-up in just a matter of seconds by one person
- The removable boom rotates 360°, easily attaches to the base and can be locked in any position
- Offers two connection points for device attachments, 3-way retrieval or winch option

The Patriot™ Davit is made up of highly durable powder coated steel material, rotates 360° and can be conveniently used on concrete, steel surfaces or even out of the back of a truck! The Patriot™ Davit should be used with the Patriot™ 3-Way Retrieval to act as a complete fall arrest and rescue system for confined spaces.

**CONFINED SPACE DAVIT ARM SYSTEM WITH WALL MOUNT**

DAC-WL-WINCH-3WAY



**CONFINED SPACE DAVIT ARM SYSTEM WITH FLOOR MOUNT**

DAC-FL-WINCH-3WAY



Frontline features the Davit Arm System, a safe and secure system designed for easy access to confined spaces, making it an ideal choice for providing overhead anchorage that can be mounted on different bases.

This equipment is especially valuable in challenging situations where workers need to enter confined spaces as it facilitates effortless overhead access and the retrieval of personnel and materials. It is ideal for providing portable, safe anchorage in confined areas like manholes, storage tanks, silos and other similar spaces. The Davit Arm System, features a cantilever boom equipped with a universal mounting bracket for easy and quick installation of our winch.

**KIT COMPONENTS**

SKU	DAC-36BOOM	DAC-54MAST	DAC-FLRMT	D -WALL	WINCH	3-WAY	3-WAY BRACKET
DAC-FL	✓	✓	✓	•	•	•	•
DAC-FL-WINCH	✓	✓	✓	•	✓	•	•
DAC-FL-WINCH-3 WAY	✓	✓	✓	•	✓	✓	✓
DAC-WL	✓	✓	•	✓	•	•	•
DAC-WL-WINCH	✓	✓	•	✓	✓	•	•
DAC-WL-WINCH-3 WAY	✓	✓	•	✓	✓	✓	✓

# TEMPORARY LIFELINES

## VERTICAL LIFELINES

### PREMIUM VERTICAL LIFELINE

VLP

25' VLP25

50' VLP50



#### KEY FEATURES

- Polysteel rope
- Diameter of the rope is 5/8"
- Snaphook end and other side has a stop-knot for added safety

Vertical Lifelines are ideal for roofing applications, scaffold, swing stages or similar types of operations where fall protection is needed above for vertical descend/ascend tasks.

### PREMIUM VERTICAL LIFELINE WITH OPENABLE ROPE GRAB AND SHOCK PACK

VLP3L

25' VLP25R3L

50' VLP50R3L

100' VLP100R3L

200' VLP200R3L



### PREMIUM VERTICAL LIFELINE WITH SHOCK PACK AND OPENABLE ROPE GRAB

VLP+RGSSSES

25' VLP25+RGSS58ES

50' VLP50+RGSS58ES



#### KEY FEATURES

- Sets up in just seconds, as easy as unscrewing one screw and feeding the 5/8" vertical lifeline, then screwing it back together
- Includes lanyard with integrated shock pack and snaphook to attach directly to back d-ring of harness
- Rope grab equipped with double locking closing mechanism

Vertical Lifelines with self-tracking openable rope grab with integrated 3' shock absorbing lanyard are ideal for roofing applications, scaffold, swing stages or similar types of operations where fall protection is needed above for vertical descend/ascend tasks.

#### KEY FEATURES

- Rope: 3 Strand, 5/8" thick
- Rope Breaking Strength: 6,000 lbs
- Rope is of high tenacity polyester material
- Rope grab is made of high grade steel material
- Includes lanyard with integrated shock pack and snaphook to attach directly to back d-ring of harness


Vertical Lifelines with self-tracking manual rope grab with integrated 18" shock absorbing lanyard are ideal for roofing applications, scaffold, swing stages or similar types of operations where fall protection is needed above for vertical descend/ascend tasks.

# HORIZONTAL LIFELINES

## 4-PERSON 100' ADJUSTABLE HORIZONTAL LIFELINE SYSTEM WITH 4' ANCHOR STRAPS

HLK1004

Introducing a new 4 man temporary horizontal lifeline made up of kernmantle rope of 5/8" diameter and a uniquely designed tensioner integrated within the lifeline. This lifeline is equipped with 4 'O Rings' as mobile anchors made up of high strength alloy steel.

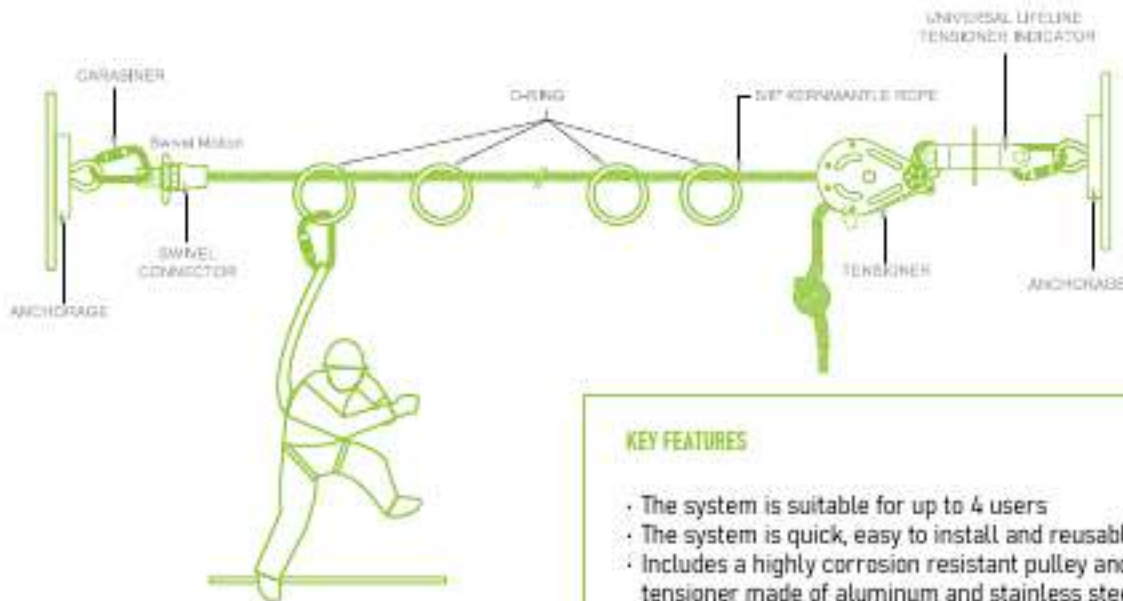

### KEY FEATURES

- The system is suitable for up to 4 users
- The system is quick, easy to install and reusable
- Includes a highly corrosion resistant pulley and tensioner made of aluminum and stainless steel components
- Includes tension indicator on one end of the line in order to create the adequate tension on the line
- Equipped with swivel brass connector, specially designed to prevent any unintentional twisting/tangling of the rope
- The system has 4 steel o-rings to enable the user to easily connect their lanyard or SRL

# ROPE GRABS

## SELF-TRACKING ROPE GRAB 5/8" WITH 3' LANYARD

RGSS58ES



### KEY FEATURES

- Openable rope grab type, makes it convenient and more productive to work with
- Rope grab is made of high grade steel material
- Rope grab equipped with double locking closing mechanism

The Self-Tracking Openable Rope Grab with integrated 3' shock absorbing lanyard is your go-to solution when working on a roof or vertical job that the use of a vertical lifeline is required.

## SELF-TRACKING ROPE GRAB FOR 5/8" LIFELINE ROPE

RGSS58



### KEY FEATURES

- Made of high strength alloy steel
- Rope grab is equipped with double locking closing mechanism
- Moves along with the user climbing up or down and locks him in the case of a fall
- The rope grab is used over vertical lifeline having a diameter of 5/8"

## ROPE TERMINATION PLATE

VLTP34



### KEY FEATURES

- Static Tensile Strength: 5,000-lbf (22kN)
- Lightweight anodized aluminum material
- Easy to tie, and easily to untied after use
- Compatible with three strand rope from 5/8" - 3/4"
- Compatible with Kernmantle rope from 7/16" - 3/4"

The Rope Termination Plate is a connector designed to function as an interface between a rope and a fall protection, work positioning, rope access, or rescue system for the purpose of coupling the rope to another connector.

# FIXED LIFELINE SYSTEMS

## VLCS

### LADDER CABLE VERTICAL LIFELINE SYSTEM



Integrated Energy Absorber

## VLRS

### SECURAIL PRO VERTICAL LIFELINE SYSTEM



Trolley equipped with an energy absorber

## GLC38

### VERTICAL LADDER LIFELINE SYSTEM CABLE GLIDER

- Freehand system, better mobility
- Cost-efficient and complaint solution

Stainless steel cable and elements for best corrosion protection

The system swageless and undeformable

Includes a cable vibration absorption system

## TRR38

### VERTICAL LADDER SYSTEM TROLLEY

Easy to retrofit on existing ladders

Freehand system

Light aluminum rigid rail

Undeformable

Ergonomic, easy use

Compatible with safe roof access extensions

## EASY MOUNTING AND INSTALLATION

AVAILABLE LENGTHS: 20', 30', 40' OR CUSTOM UPON REQUEST

# RESCUE SYSTEMS

The Rescue Ladder Basic System is designed for rescuing a worker in the event of a fall with minimal prior rescue training. The system is simple to deploy using the existing or a temporary anchor point allowing the victim to climb safely. A great product to conveniently keep readily accessible at a construction jobsite, an off-site location, a manufacturing plant, refineries or any other location that presents hazards when working at heights and such rescue method is possible.

## RESCUE 18' LADDER KIT

RLA18



### KEY FEATURES

- 18ft webbed ladder
- ANSI Z359.12 Steel Carabiner (30kN)
- Deployment Bag

## RESCUE 18' LADDER KIT WITH PULLEY SYSTEM

RLA18B



### KEY FEATURES

- 18ft webbed ladder
- Belay Device (Progress Capture Pulley)
- Belay Rope (Static 36ft Rope)
- Deployment Bag

The ladder kit allows a capable fall victim to climb to safety while the rescuer pulls rope slack through the included rope grab/pulley system eliminating the chance of a high impact secondary fall.



# ALL FALLS CAN BE PREVENTABLE!

According to the Bureau of Labor Statistics, in recent years, hundreds of workers across all industries have lost their lives in workplace incidents, and many more have been seriously injured—many of which could have been prevented with proper fall protection and planning.

**Falls are the leading cause  
of death in construction.**

In the U.S., OSHA cites falls as the #1 cause of construction fatalities each year.

According to the BLS, in 2023, there were

**421** construction  
fatalities  
recorded

caused by falls from elevation

**Falling objects injure  
thousands annually.**

According to the BLS, hundreds of workers are struck by dropped objects every year—many resulting in serious injuries or death.



# FALL PROTECTION FOR TOOLS

## FALL PROTECTION FOR TOOLS AND STORAGE VINYL BAG

MPBAG50



### KEY FEATURES

- Includes 6 tethering points inside
- Built with premium material
- Back straps are lightweight and of moisture wicking material
- Weight Capacity: 50 lbs



SCAN QR CODE



TO WATCH  
PRODUCT VIDEO

## TOOLGRIP™ TOOL POUCH WITH TOOL D-RINGS, TOOL SLOTS AND ZIPPER CLOSURE

TP10



### KEY FEATURES

- Tunnel Belt Loop with Double-Zipper Closure
- 10 lbs (4.5 kg) Safe Working Capacity
- Ventilated Design
- Durable Polyester Construction
- Two Exterior Tool Loops and Two Exterior D-Rings

## TOOLGRIP™ 10 LBS TOOL POUCH (LARGE)

BP10L



### KEY FEATURES

- Easy Belt Attachment
- Interior Safety Flaps and Reinforced Top Edge
- 10 lbs (4.5 kg) Safe Storage Capacity
- Ventilated Design
- High-Quality Polyester Construction

## FALL PROTECTION FOR TOOLS

### TOOLGRIP™ 5 LBS SWIVELING HAMMER HOLSTER WITH SIDE D-RINGS

HH05SW



#### KEY FEATURES

- 5 lbs (2.26 kg) Safe Working Capacity
- Dual Metal D-Rings
- Hands-Free Operation
- Swiveling User-ability
- Universal Attachment

### TOOLGRIP™ 5 LBS TOOL WRIST BAND

WB05



#### KEY FEATURES

- Universal Fit
- Tool Tether D-Ring
- Velcro Closure
- Lightweight and Durable

### TOOLGRIP™ 5 LBS TOOL HOLSTER WITH SIDE D-RINGS

TH05



#### KEY FEATURES

- 5 lbs (2.26 kg) Safe Working Capacity
- Dual Metal D-Rings for Hands-Free Operation
- Lightweight, Durable Design
- Three Sized Compartments with Two Ventilation Eyelets
- Tunnel Belt Loop



**TOOLGRIP™ 22 LBS TOOL LANYARD WITH D-RING CINCH**

ACTLS222C



**KEY FEATURES**

- Capacity: 22 lbs
- Tool cinch tether is meant for larger tools that need to be choked around handle.
- Expanded Length: 4.43'
- Tool tether is of elastic material.

**TOOLGRIP™ 11 LBS TWIN TOOL LANYARD**

ACTLS222



**KEY FEATURES**

- Relaxed Length: 2.79 ft
- Expanded Length: 4.43 ft
- Capacity: 11 lbs



## FALL PROTECTION FOR TOOLS

### TOOLGRIP™ 4 LBS WRIST TOOL LANYARD

ACTLWB



#### KEY FEATURES

- Capacity: 4.4 lbs
- Wrist band closure is made out of velcro
- Tool tether is approximately 20"
- Tool tether is of elastic material

### TOOLGRIP™ COIL TOOL TETHER 5 LBS WITH DOUBLE SELF-LOCKING ALUMINUM CARABINER

TLC05



#### KEY FEATURES

- Capacity: 5 lbs
- Carabiner: Self-locking Aluminum Carabiner
- Use and compatible with most hand tool 5 lbs or lighter

### TOOLGRIP™ ELASTIC TOOL TETHER 15 LBS WITH STEEL TURN LOCK CARABINER

TLS15



#### KEY FEATURES

- Relaxed Length : 3 ft
- Expanded Length : 5.5 ft
- Carabiner: Manual Twist Lock
- Capacity: 15 lbs

### TOOLGRIP™ ELASTIC TOOL TETHER 30 LBS WITH SELF-LOCKING ALUMINUM CARABINER

TLS30



#### KEY FEATURES

- Relaxed Length : 3 ft
- Expanded Length : 5 ft
- Capacity: 30 lbs

### TOOLGRIP™ QUICK WRAP ANCHORING TOOL TAPE 12'

ACQW12



#### KEY FEATURES

- Bond Strength: 5 lbs
- Length of Roll : 12'
- Thickness : 0.5 mm
- Width : 25 mm

### TOOLGRIP™ 4 LBS WEBBING TOOL D-RING ANCHOR

ACTLDR



#### KEY FEATURES

- Capacity with Self Merging Tape: 4.4 lbs
- Capacity with Pass-thru Connection: 22 lbs
- Made of high strength polyester safety

# LADDER ACCESSORIES

## UNIVERSAL LADDER STABILIZER

LAS48



### KEY FEATURES

- Weight: 6 lbs
- Adjustable Width: 40" - 46"
- User Max Capacity: 300 lbs

The Universal Ladder Stabilizer enhances user stability when using straight or extension ladders against a wall. It provides a wider base of support, reducing the risk of tipping or wobbling during use. This stabilizer is equipped with two rubber bumpers on each end to safeguard walls and surfaces, it's adjustable from a total width of 40" to 46" and offers a universal fit compatible with most ladders.



## LADDER SAFETY DOCK

LAC12



### KEY FEATURES

- Weight: 40 lbs
- Max Ladder Width: 17"
- User Max Capacity: 300 lbs

Ensure safe and secure roof access with the Non-penetrating Ladder Safety Dock. This innovative solution is designed to securely hold an extension ladder in place, providing a reliable tie-off point for users accessing and exiting building roofs whether built with a parapet wall or a flat roof.

# CUSTOMIZE YOUR GEAR AND STAND OUT ON THE JOB

**Fall protection just got a whole lot more exciting!** Now you can add your company's logo to Frontline's high-quality fall protection equipment, ensuring that your team looks professional while staying safe on the job.



## IN-HOUSE CUSTOMIZATION

Customize our most popular harnesses, storage bags and guardrail systems with **no extra fees!**

### COMBAT HARNESSES & BAGS



- Minimum order of 12 units
- 2-3 Business day turnaround time

### GUARDRAIL SYSTEMS



- Minimum order of 6 kits
- 4-6 Week lead time

 **CUSTOM COLOR UPON REQUEST**

Contact us today to learn more about how we can help you elevate your brand while keeping your team safe.



## CUSTOMIZABLE PRODUCTS

Discover how we personalize our products to your specifications.  
Scan QR code to watch video.





☎ (888) 523-1795

✉ [info@frontlinefall.com](mailto:info@frontlinefall.com)

📍 1601 NW 82nd Ave. Miami, FL 33126

