



ROOFTOP

Safety Kit

All-in-one solution for the roofer

The Guardian Rooftop Safety Kit provides everything roofers need for a complete, OSHA-compliant fall protection system in one convenient package. Designed by roofers for roofers, this kit features a durable rope vertical lifeline assembly with a built-in energy absorber, a Velocity full-body harness with five-point adjustability for a secure fit, and a reusable Temper roof anchor with hardware included.

This all-in-one fall protection kit simplifies setup and ensures safe, efficient performance on every roofing job.



**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



ROOFTOP Safety Kit



Suitable for:



Key features & benefits

Complete fall protection kit

Includes all essential components for safe, compliant rooftop work in a 3.5-gallon bucket

Ergonomic steel positioning device

Enables smooth, controlled movement along the lifeline for safe and efficient work positioning

Durable polysteel rope

Resists cuts, abrasions, and moisture for long-term reliability in harsh job site environments


Adjustable full-body harness

Five-point harness design ensures a secure, comfortable fit for a wide range of users

Reusable roof anchor

A durable, zinc-plated steel roof anchor with fixing hardware included

Kit contents

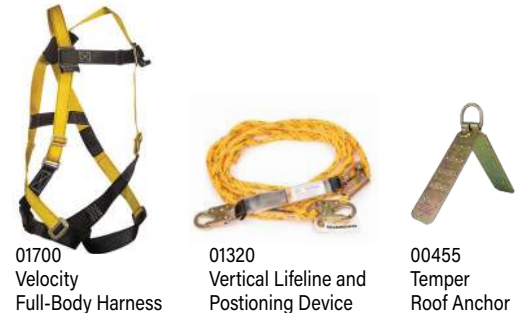

Specifications

User weight range

(including all clothing, tools, and equipment)
ANSI | 130-310 lb **OSHA** | 130-420 lb

Anchor minimum breaking strength | 5,000 lb

Materials

Velocity Harness - steel, polyester & nylon

VLA - polyester & galvanized steel

Temper Anchor - zinc-plated steel

Part number (s) Description

00805	Rooftop Safety Kit: full-body harness, temper anchor, vertical lifeline assembly
00815	Rooftop Safety Kit: full-body harness, temper anchor, vertical lifeline assembly

Vertical Lifeline Length	Weight Range ANSI	Weight Range OSHA & CSA
25 ft	130-310 lb	130-420 lb
50 ft	130-310 lb	130-420 lb

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI Z359.7.

This product is compliant with the following safety regulations and consensus standard:

Harness - ANSI Z359.11 | OSHA 1910.140 & 1926.502

VLA - OSHA 1910.140 & 1926.502

Temper Anchor - ANSI Z359.18 | OSHA 1910.140 & 1926.502

For more information:

+1 (800) 466 6385

customer.service@guardianfall.com



Designed, tested
and assembled in
the **United States**